

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE NORTH BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES
AND A PORTION OF MINERAL SURVEY NO. 4518,
THE SUBDIVISION OF SECTION 3,
AND A METES-AND-BOUNDS SURVEY IN SECTION 3,
TOWNSHIP 23 SOUTH, RANGE 63 EAST,
OF THE MOUNT DIABLO MERIDIAN,
IN THE STATE OF NEVADA

EXECUTED BY

Richard A. Zaninovich, Cadastral Surveyor

Under Special Instructions dated April 15, 2002,
and approved April 15, 2002,
which provided for the surveys included under Group No. 805,
and Assignment Instructions dated April 15, 2002.

Survey commenced April 15, 2002

Survey completed February 6, 2003

INDEX DIAGRAM

TOWNSHIP 23 SOUTH, RANGE 63 EAST, MOUNT DIABLO MERIDIAN, NEVADA

			2	4	
6	5	4	5 3	2	1
			5		
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Dependent Resurvey of a Portion of M.S. No. 4518 pp. 6 - 7
 Subdivision of Section 3 pp. 7 - 9
 Metes-and-bounds survey in Section 3 pp. 9 - 12

TOWNSHIP 23 SOUTH, RANGE 63 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines and a portion of Mineral Survey No. 4518, the subdivision of section 3, and a metes-and-bounds survey in section 3, Township 23 South, Range 63 East, Mount Diablo Meridian, Nevada.

The north boundary and subdivisional lines were surveyed by T.A. Magee in 1883 under Contract No. 149. The north boundary was resurveyed by C.S. Swanholm and the subdivisional lines were resurveyed by R.C. Yundt in 1931 under Group No. 169. A portion of the north boundary was resurveyed by H.G. Parker in 1957-58 under Group No. 371. A portion of the north boundary and portions of the subdivisional lines were resurveyed by R.A. Zaninovich in 1995-96 under Group No. 760. Mineral Survey No. 4518 was surveyed by F.W. Rodolf in 1921. Other surveys remote to this area are not included.

Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 805 dated April 15, 2002.

Measurements were made with Trimble 4700 GPS receivers. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.

The geographic position NAD 83 (1999) of the 1/4 sec. cor. of secs. 2 and 3, as determined by a tie made to National Geodetic Survey control (formerly U.S. Coast and Geodetic Survey triangulation) station "P 364" is as follows:

Latitude 35°58'35.261" N. Longitude 114°55'23.241" W.

The mean magnetic declination is 15° E., as shown on U.S.G.S. quadrangle map "HENDERSON, NEV." dated 1970.

190

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Reestablishment of the Survey Executed by T.A. Magee in 1883 and the Resurveys Executed by C.S. Swanholm in 1931 and H.G. Parker in 1957-58</p> <hr/> <p>Beginning at the cor. of secs. 2, 3, 34 and 35, monumented with a stainless steel post, 2 1/2 ins. diam., set in a collar of stone with brass cap mkd. as described in the field notes of the 1995-96 resurvey executed by R.A. Zaninovich under Group No. 760.</p> <p>S. 89°45'10" W., bet. secs. 3 and 34.</p>
0.50	Power transmission line, NW-SE.
9.999	<p>The E-E 1/64 sec. cor. of secs. 3 and 34, monumented with an iron post, 2 1/2 ins. diam., set in a collar of stone, with brass cap mkd. as described in the field notes of the 1957-58 resurvey.</p> <hr/> <p>S. 89°50'00" W., beginning new measurement.</p>
1.380	Intersect a brass tablet, set in concrete flush with the surface of the ground mkd. COH 299-203 1975.
4.781	Intersect a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd. CITY OF HENDERSON PLS 7190, and centerline of railroad bears N. 63°42'20" W. and S. 63°42'20" E.
8.182	Intersect a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd. CITY OF HENDERSON PLS 7190.
10.013	<p>The E 1/16 sec. cor. of secs. 3 and 34, monumented with a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.</p> <p style="text-align: center;">CITY OF HENDERSON E 1/16 PLS 7190</p> <p>This monument is accepted as a careful and faithful perpetuation of the 1957-58 corner position referenced by John R. Rinaldi, PLS 7190, in 1996 as shown on Corner Record, Document No. 960404.00988, on file in the office of the Clark County Recorder.</p> <p>From this corner reference monuments, 5/8 in. rebar with aluminum caps mkd. CITY OF HENDERSON PLS 7190 RM and the distance, bear:</p> <p style="text-align: center;">S. 57°57'10" E., 37.89 ft. S. 32°17'40" E., 23.60 ft. S. 42°47'20" W., 26.87 ft. S. 64°11'20" W., 44.65 ft.</p> <hr/> <p>S. 89°45'10" W., beginning new measurement.</p>
10.012	The W-E 1/64 sec. cor. of secs. 3 and 34, monumented with a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.

191

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">CITY OF HENDERSON</p> <p style="text-align: center;">PLS 7190</p> <p>This monument is accepted as a careful and faithful perpetuation of the 1957-58 corner position referenced by John R. Rinaldi, PLS 7190, in 1996 as shown on Corner Record, Document No. 960404.00989, on file in the office of the Clark County Recorder.</p> <p>From this corner reference monuments, 5/8 in. rebar with aluminum caps mkd. CITY OF HENDERSON PLS 7190 RM and the distance, bear:</p> <p style="text-align: center;">S. 74°00'00" E., 53.64 ft. S. 59°39'50" E., 30.40 ft. S. 57°47'00" W., 31.35 ft. S. 71°26'10" W., 54.28 ft.</p> <hr/> <p>S. 89°45'20" W., beginning new measurement.</p>
10.016	<p>The 1/4 sec. cor. of secs. 3 and 34, monumented with a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.</p> <p style="text-align: center;">CITY OF HENDERSON 1/4 PLS 7190</p> <p>This monument is accepted as a careful and faithful perpetuation of the 1931 corner position referenced by John R. Rinaldi, PLS 7190, in 1996 as shown on Corner Record, Document No. 960404.00990, on file in the office of the Clark County Recorder.</p> <p>From this corner reference monuments, 5/8 in. rebar with aluminum caps mkd. CITY OF HENDERSON PLS 7190 RM and the distance, bear:</p> <p style="text-align: center;">S. 63°34'30" E., 58.20 ft. S. 44°07'30" E., 37.88 ft. S. 42°08'50" W., 38.51 ft. S. 61°54'30" W., 60.42 ft.</p> <hr/> <p>S. 89°45'40" W., beginning new measurement.</p>
10.006	<p>The E-W 1/64 sec. cor. of secs. 3 and 34, monumented with a rebar, 5/8 in. diam., set flush with the paved surface of a road, with aluminum cap mkd.</p> <p style="text-align: center;">THE KEITH COMPANIES NV PLS 8866</p> <p>This monument was set by Christopher L. Albers, in 1998 as shown on Corner Record, Document No. 980618.01052, on file in the office of the Clark County Recorder, and is accepted as a careful and faithful reestablishment of the 1957-58 corner position.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	S. 89°46'30" W., beginning new measurement.
10.010	The W 1/16 sec. cor. of secs. 3 and 34, monumented with an iron post, 2 1/2 ins. diam., projecting 6 ins. above the ground, with brass cap mkd. as described in the field notes of the 1957-58 resurvey.
	S. 89°45'20" W., beginning new measurement.
10.004	The W-W 1/64 sec. cor. of secs. 3 and 34, monumented with an iron post, 2 1/2 ins. diam., projecting 6 ins. above the ground, with brass cap mkd. as described in the field notes of the 1957-58 resurvey.
	S. 89°46'50" W., beginning new measurement.
10.004	The cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 2 ins. diam., set in a collar of stone, with brass cap mkd. as described in the field notes of the 1931 resurvey.
<p>DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA</p>	
<p>Reestablishment of the Survey Executed by T.A. Magee in 1883 and the Resurveys Executed by R.C. Yundt in 1931 and R.A. Zaninovich in 1995-96</p>	
<p>From the 1/4 sec. cor. of secs. 2 and 3, monumented with an iron post, 1 in. diam., set in a collar of stone, with brass cap mkd. as described in the field notes of the 1931 resurvey, and a mound of stone west of the corner.</p>	
<p>From this corner National Geodetic Survey control (formerly U.S. Coast and Geodetic Survey triangulation) station "P 364", monumented with a standard brass tablet set in bedrock, stamped P 364 1963, bears S. 80°07'10" E., 42.684 chs. dist</p>	
<p>N. 0°06'50" W., bet. secs. 2 and 3.</p>	
2.443	Intersect line 2-3, M.S. No. 4518, Crested Butte lode.
20.125	Point for the N 1/16 cor. of secs. 2 and 3, at proportionate dist.; this position was determined, but not monumented in the 1995-96 resurvey and is not monumented in this survey.
21.553	Intersect line 4-1, M.S. No. 4518, Red Rose lode.
33.058	Centerline of railroad on curve, concave northeast, from S. 63°42'20" E. to S. 69°51'20" E.; Degree of Curve = 1°, Tangent = 307.80 feet. From this point the calculated Point of Intersection, determined at intersection of the observed tangents, bears S. 60°52'00" E., 1.316 chs. dist.
34.80	Power transmission line, NE-SW.

193

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
37.270	Intersect power transmission line, bears N. 54°27'10" E. and S. 54°27'10" W., and a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.
	<p style="text-align: center;">LADWP SURVEY POINT NO L42R C984 RLS2708 POWER SYSTEM</p>
	set for the centerline of right-of-way N-10683, as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.
39.00	Power transmission line, NW-SE.
39.130	Point of intersection with the northerly line of right-of-way N-10683; hereinafter described.
40.350	The cor. of secs. 2, 3, 34 and 35, on the north boundary of the Tp., hereinbefore described.
	<hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by T.A. Magee in 1883 and the Resurvey Executed by R.C. Yundt in 1931</p> <hr/>
	From the 1/4 sec. cor. of secs. 3 and 10, monumented with an iron post, 1 in. diam., set in a mound of stone, with brass cap mkd. as described in the field notes of the 1931 resurvey.
	S. 89°58'50" W., bet. secs. 3 and 10.
19.953	Point for the W 1/16 sec. cor. of secs. 3 and 10; not monumented.
39.906	The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., projecting 12 ins. above the ground with brass cap mkd. as described in the field notes of the 1931 resurvey.
	<hr/> <p style="text-align: center;">N. 0°11'30" W., bet. secs. 3 and 4.</p>
13.50	Power transmission line, NE-SW.
20.178	Point for the S 1/16 sec. cor. of secs. 3 and 4; not monumented.
27.231	Intersect power transmission line, bears N. 69°26'30" E. and S. 69°26'30" W., and a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.
	<p style="text-align: center;">LADWP SURVEY POINT NO L42R C903 RLS2708 POWER SYSTEM</p>
	set for the centerline of right-of-way N-10683, as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
28.847	Intersect a rebar, 5/8 in. diam., set in a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">LADWP SURVEY POINT NO L42R R603 RLS2708 POWER SYSTEM</p>
	set for the northerly line of right-of-way N-10683, as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.
30.267	Point for the N-S 1/64 sec. cor. of secs. 3 and 4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">N-S 1/64 S 4 S 3 2002</p>
40.356	The 1/4 sec. cor. of secs. 3 and 4, monumented with an iron post, 1 in. diam., set in a mound of stone, with brass cap mkd. as described in the field notes of the 1931 resurvey.
	N. 0°12'50" W., beginning new measurement.
40.100	The cor. of secs. 3, 4, 33 and 34, on the north boundary of the Tp., hereinbefore described.
	<p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4518, T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p style="text-align: center;">Reestablishment of the Survey Executed by F.W. Rodolf in 1921</p>
	From Corner No. 2, Crested Butte lode, identical with Corner No. 3, Cream Rose lode, both of M.S. No. 4518, monumented with a 4x4 post, no mks. visible, set in a mound of stone.
	N. 72°07'00" W., on line 2-3, Crested Butte lode.
6.944	Intersect the line bet. secs. 2 and 3, hereinbefore described.
22.704	Corner No. 3, M.S. No. 4518, Crested Butte lode, monumented with a 4x4 post, no mks. visible, set in a mound of stone.
	N. 17°21'10" E., on line 3-4, M.S. No. 4518, Crested Butte lode.

195

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4518,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
9.088	<p>Corner No. 4, Crested Butte lode, identical with Corner No. 3, Red Rose lode, both of M.S. No. 4518, monumented with a mound of stone, no 4x4 post found.</p>
	<p>At the corner point at the center of the mound of stone</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T23S R63E</p>
	<p style="text-align: center;">  </p>
	<p style="text-align: center;">2002</p>
	<p>From this corner, a rebar, 5/8 in. diam., set flush with the surface of the ground, with plastic cap mkd. PLS 6331 J SMITH, bears N. 38°52'00" E., 1.146 chs. dist.; no map record of this monument was found.</p>
	<hr/> <p>N. 17°21'10" E., on line 3-4, M.S. No. 4518, Red Rose lode.</p>
9.088	<p>Corner No. 4, M.S. No. 4518, Red Rose lode, monumented with a brass tablet, set in bedrock, mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines executed by R.A. Zaninovich in 1995-96, and surrounded by a mound of stone.</p>
	<hr/> <p>S. 72°07'30" E., on line 4-1, M.S. No. 4518, Red Rose lode.</p>
10.025	<p>Intersect the line bet. secs. 2 and 3, hereinbefore described.</p>
22.718	<p>Corner No. 1, Red Rose lode, identical with Corner No. 4, Yellow Rose lode, both of M.S. No. 4518, monumented with a 4x4 post, no mks. visible, set in a mound of stone.</p>
	<hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 3, T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 3 and 10.</p>
	<p>N. 0°06'40" W., on the N-S center line of sec. 3.</p>
20.189	<p>Point for the center S 1/16 sec. cor. of sec. 3; not monumented.</p>
40.378	<p>Point for the center 1/4 sec. cor. of sec. 3, at intersection with the E-W center line.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

196

SUBDIVISION OF SECTION 3,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T23S R63E C 1/4 S 3 2002
46.70	Power transmission line, NE-SW.
49.113	Power transmission line, N. 54°27'10" E. and S. 54°27'10" W.
50.973	Intersect the northerly line of right-of-way N-10683.
80.606	The 1/4 sec. cor. of secs. 3 and 34 on the north boundary of the Tp.
	<hr/> From the 1/4 sec. cor. of secs. 2 and 3. S. 89°57'00" W., on the E-W center line of sec. 3.
40.045	The center 1/4 sec. cor.
48.90	Power transmission line, NE-SW.
52.300	Power transmission line, N. 54°27'10" E. and S. 54°27'10" W.
54.909	Intersect the northerly line of right-of-way N-10683.
60.024	Point for the center W 1/16 sec. cor. of sec. 3. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.
	W 1/16 C ——— C S 3 2002
80.003	The 1/4 sec. cor. of secs. 3 and 4.
	<hr/> From the point for the W 1/16 sec. cor. of secs. 3 and 10. N. 0°09'00" W., on the N-S center line of the SW1/4 of sec. 3.
20.184	Point for the SW 1/16 sec. cor. of sec. 3, at intersection with the E-W center line of the SW1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	SW 1/16 S 3 2002
30.276	Point for the center N-SW 1/64 sec. cor. of sec. 3.

SUBDIVISION OF SECTION 3,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 3 C-N-SW 1/64 2002</p>
32.50	Power transmission line, NE-SW.
34.864	Power transmission line, N. 54°27'10" E. and S. 54°27'10" W.
36.723	Intersect the northerly line of right-of-way N-10683.
40.368	The center W 1/16 sec. cor. of sec. 3.
	<hr/> <p>From the point for the center S 1/16 sec. cor. of sec. 3. S. 89°58'00" W., on the E-W center line of the SW1/4 of sec. 3.</p>
19.966	The SW 1/16 sec. cor.
35.40	Power transmission line, NE-SW.
39.932	The point for the S 1/16 sec. cor. of secs. 3 and 4.
	<hr/> <p>From the center N-SW 1/64 sec. cor. of sec. 3. S. 89°57'30" W., on the E-W center line of the NW1/4SW1/4 of sec. 3.</p>
3.10	Power transmission line, NE-SW.
11.850	Power transmission line, N. 69°26'30" E. and S. 69°26'30" W.
16.173	Point of intersection with the northerly line of right-of-way N-10683; hereinafter described.
19.972	The N-S 1/64 sec. cor. of secs. 3 and 4.
	<hr/> <p style="text-align: center;">METES-AND-BOUNDS SURVEY IN SECTION 3, T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Note: The following metes-and-bounds survey of a portion of the northerly line of right-of-way N-10683 is determined at a distance of 100 feet northerly and perpendicular to the centerline of the power transmission line, based on ties made throughout this survey.</p> <p>From the point of intersection of the northerly line of right-of-way N-10683, with the E-W center line of the NW1/4SW1/4 of sec. 3.</p>

198

METES-AND-BOUNDS SURVEY IN SECTION 3,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T23S R63E S / ROW NS — NS 3 ROW 2002</p> <p>From this point a rebar, 5/8 in. diam., on the line bet. secs. 3 and 4, hereinbefore described, bears S. 69°26'30" W., 4.054 chs. dist.</p> <p>From this same point a rebar, 5/8 in. diam., on the line bet. secs. 3 and 4, hereinbefore described, bears S. 51°16'20" W., 4.859 chs. dist.</p> <p>N. 69°26'30" E., on the northerly line of right-of-way N-10683.</p>
1.274	<p>Intersect a rebar, 5/8 in. diam., set in a collar of stone, with aluminum cap mkd.</p> <p style="text-align: center;">LADWP SURVEY POINT NO L42R R756 RLS2708 POWER SYSTEM</p> <p>as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.</p> <p>From this point a rebar, 5/8 in. diam., set flush with the surface of the ground, at the center of a power line tower, with aluminum cap mkd. LAPS L42R T3256 RLS2708, bears S. 20°33'30" E., 1.515 chs. dist.</p>
15.994	<p>Intersect a rebar, 5/8 in. diam., set flush with the surface of the ground, with aluminum cap mkd.</p> <p style="text-align: center;">LADWP SURVEY POINT NO L42R R755 RLS2708 POWER SYSTEM</p> <p>as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.</p> <p>Raise a mound of stone north of the corner.</p> <p>From this point a rebar, 5/8 in. diam., set flush with the surface of the ground, at the center of a power line tower, with aluminum cap mkd.</p>

199

METES-AND-BOUNDS SURVEY IN SECTION 3,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>LADWP SURVEY POINT NO L42R S963 RLS2708 POWER SYSTEM</p> <p>as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder, bears S. 28°03'10" E., 1.528 chs. dist.</p> <hr/> <p>N. 54°27'10" E., on the northerly line of right-of-way N-10683.</p>
1.452	Intersect the N-S center line of the SW1/4 of sec. 3.
7.726	Intersect the E-W center line of sec. 3.
14.613	Intersect a rebar, 5/8 in. diam., set in a collar of stone, with aluminum cap mkd.
	<p>LADWP SURVEY POINT NO L42R R754 RLS2708 POWER SYSTEM</p> <p>as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.</p> <p>From this point a rebar, 5/8 in. diam., set flush with the surface of the ground, at the center of a power line tower, with aluminum cap mkd. LAPS L42R T3254 RLS2708, bears S. 35°32'50" E., 1.515 chs. dist.</p>
25.969	Intersect the N-S center line of sec. 3.
32.113	Intersect a rebar, 5/8 in. diam., set in a collar of stone, with aluminum cap mkd.
	<p>LADWP SURVEY POINT NO L42R R753 RLS2708 POWER SYSTEM</p> <p>as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.</p> <p>From this point a rebar, 5/8 in. diam., set flush with the surface of the ground, at the center of a power line tower, with aluminum cap mkd. LAPS L42R T3253 RLS2708, bears S. 35°32'50" E., 1.515 chs. dist.</p>
75.114	The point of intersection with the line bet. secs. 2 and 3, monumented with an aluminum cap, set in concrete 2 ins. below the surface of a graded road, mkd.

200

METES-AND-BOUNDS SURVEY IN SECTION 3,
T. 23 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

LADWP
SURVEY POINT NO
L42R
R684
RLS2708
POWER SYSTEM

as shown on Record of Survey File 61, Page 68, on file in the office of the Clark County Recorder.

From this point a rebar, 5/8 in. diam., set flush with the surface of the ground, at the center of a power line tower, with aluminum cap mkd. LAPS L42R T3251 RLS2708, bears N. 87°01'00" E., 2.815 chs. dist.

GENERAL DESCRIPTION

The average elevation of the area surveyed is about 750 meters. General drainage is to the north. Vegetation consists of creosote and cacti.

201

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

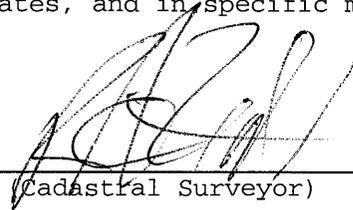
Sean C. Whelan..... Range Technician
Michelle E. Martin..... Range Technician

CERTIFICATE OF SURVEY

I, Richard A. Zaninovich, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 15th day of April, 2002, I have dependently resurveyed a portion of the north boundary, a portion of the subdivisional lines and a portion of Mineral Survey No. 4518, subdivided section 3, and executed a metes-and-bounds survey in section 3, Township 23 South, Range 63 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 6, 2003

(Date)


(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines and a portion of Mineral Survey No. 4518, the subdivision of section 3, and a metes-and-bounds survey in section 3, Township 23 South, Range 63 East, Mount Diablo Meridian, Nevada, executed by Richard A. Zaninovich, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

February 7, 2003

(Date)


(Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 23 S., R. 63 E., M.D.M., Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor, Nevada)~~