

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES
AND PORTIONS OF CERTAIN MINERAL SURVEYS,
AND THE SUBDIVISION OF SECTION 9,
AND THE METES-AND-BOUNDS SURVEYS OF A PORTION OF
NEVADA STATE HIGHWAY NO. 374 AND TRACT 37,
TOWNSHIP 12 SOUTH, RANGE 46 EAST,
OF THE MOUNT DIABLO MERIDIAN,
IN THE STATE OF NEVADA

EXECUTED BY

Thomas E. Casinger, Cadastral Surveyor

Under Special Instructions dated July 23, 1998,
and approved July 23, 1998,
which provided for the surveys included under Group No. 774,
and Assignment Instructions dated July 23, 1998.

Survey commenced July 23, 1998

Survey completed April 17, 2000

INDEX DIAGRAM

TOWNSHIP 12 SOUTH, RANGE 46 EAST

240

6	5	4	3	2	1
		23			
7	8	22 9	10	11	12
		21	17 16		
18	17	19 16	15 15	8 14	13
		18	14	8	
19	20	21	13 22	6 23	3 24
			12	6	
30	29	28	11 27	5 26	25
			10		
31	32	33	34	35	36

- | | | |
|---|---------------------------|---------------------------|
| M.S. No. 2339....PP 24-25 | M.S. No. 2490....PP 57-58 | M.S. No. 2585....PP 78-79 |
| M.S. No. 2344....PP 25-28 | M.S. No. 2491....PP 59-60 | M.S. No. 2635....PP 79-82 |
| M.S. No. 2377....PP 28-35 | M.S. No. 2492....PP 60-62 | M.S. No. 2649....PP 82-83 |
| M.S. No. 2449....PP 35-37 | M.S. No. 2493....PP 62-63 | M.S. No. 2650....PP 84-86 |
| M.S. No. 2451....PP 37-42 | M.S. No. 2494....PP 63-64 | M.S. No. 2673....PP 86-89 |
| M.S. No. 2457....PP 42-46 | M.S. No. 2530....PP 65-66 | M.S. No. 2784....PP 89-91 |
| M.S. No. 2472....PP 46-48 | M.S. No. 2539....PP 66-68 | M.S. No. 3156....PP 92-96 |
| M.S. No. 2487....PP 48-52 | M.S. No. 2576....PP 68-72 | M.S. No. 5086....PP 96-97 |
| M.S. No. 2488....PP 52-53 | M.S. No. 2583....PP 72-74 | M.S. No. 5093....PP 97-99 |
| M.S. No. 2489....PP 54-57 | M.S. No. 2584....PP 74-78 | |
| Subdivision of section 9.....PP 99-103 | | |
| Metes-and-Bounds survey of a portion of Nevada State Highway No. 374.....PP 104-105 | | |
| Metes-and-Bounds survey of Tract 37.....PP 105-111 | | |

TOWNSHIP 12 SOUTH, RANGE 46 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and portions of certain mineral surveys, and the subdivision of section 9, and the metes-and-bounds surveys of a portion of Nevada State Highway No. 374 and Tract 37, Township 12 South, Range 46 East, Mount Diablo Meridian, Nevada.

The Third Standard Parallel South, the north, east and west boundaries, and the subdivisional lines were surveyed by Deputy Surveyor O.E. Brashears in 1906 under Contract No. 248. The Townsite of Rhyolite was surveyed by U.S. Examiner of Surveys W.O. Owen in 1907 as shown on the plat of the survey approved June 19, 1908, cancelled October 5, 1948. A portion of the Third Standard Parallel South was retraced by U.S. Cadastral Engineer Emil Voigt in 1921 under Group No. 90.

HISTORY OF MINERAL SURVEYS PERTAINING TO RESURVEY

<u>Mineral Survey</u>	<u>Date</u>	<u>U.S. Mineral Surveyors</u>	<u>Cancellation Date</u> (If applicable)
M.S. 2339	1905	W. B. Milliken	
M.S. 2344	1905	W. B. Milliken	8/19/1998
M.S. 2345	1905	W. B. Milliken	
M.S. 2346	1905	W. B. Milliken	8/19/1998
M.S. 2348	1905	Arthur Philbrick	8/19/1998
M.S. 2377	1906	Robert M. Cannon	
M.S. 2384	1905	Frank J. Cramer	
M.S. AM. 2384	1906	George E. Sherer	
M.S. 2422	1905	W. B. Milliken	
M.S. 2430	1905	Frank J. Cramer	
M.S. 2449	1905	George E. Sherer	
M.S. 2450	1905	George E. Sherer	
M.S. 2451	1905	George E. Sherer	
M.S. 2454	1905	Carl Stoddard	8/19/1998
M.S. 2457	1905	George E. Sherer	
M.S. 2472	1905	Arthur Philbrick	
(Note: certain lodes cancelled)			9/10/1998
M.S. 2487	1905	R.E.L. Collier	
M.S. 2488	1905	R.E.L. Collier	8/19/1998
M.S. 2489	1905	R.E.L. Collier	
M.S. 2490	1905	R.E.L. Collier	
M.S. 2491	1905	R.E.L. Collier	
M.S. 2492	1905	R.E.L. Collier	
M.S. 2493	1905	R.E.L. Collier	
M.S. 2494	1905	R.E.L. Collier	
M.S. 2495	1905	R.E.L. Collier	
M.S. 2515	1905	R.E.L. Collier	8/19/1998
M.S. 2527	1906	Robert M. Cannon	2/10/1993
M.S. 2530	1906	George E. Sherer	
M.S. 2538	1906	George E. Sherer	
M.S. 2539	1906	Donald Cameron	
M.S. 2551	1906	George E. Sherer	8/19/1998
M.S. 2576	1906	William B. Milliken	
M.S. 2583	1906	William B. Milliken	
M.S. 2584	1906	William B. Milliken	
M.S. 2585	1906	William B. Milliken	
M.S. 2587	1906	George E. Sherer	8/19/1998
M.S. 2628	1906	Donald Cameron	8/19/1998
M.S. 2635	1906	George E. Sherer	
M.S. 2649	1906	W. B. Milliken	

TOWNSHIP 12 SOUTH, RANGE 46 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS				
	M.S. 2650	1906	W. B. Milliken	
	M.S. 2658	1906	Robert M. Cannon	2/10/1993
				8/19/1998
	M.S. 2663	1906	Robert M. Cannon	2/10/1993
	M.S. 2670	1906	James C. Kennedy	2/10/1993
	M.S. 2671	1906	John S. Hamman	
	M.S. 2673	1906	George E. Sherer	
	M.S. 2715	1906	George E. Sherer	
	M.S. 2726	1906	Robert M. Cannon	8/19/1998
	M.S. 2736	1906	John S. Hamman	
	M.S. 2767	1906	Donald Cameron	8/19/1998
	M.S. 2784	1906	William J. Moran	
	M.S. 2804	1906	William J. Moran	2/10/1993
	M.S. 2805	1906	William J. Moran	2/10/1993
	M.S. 2806	1906	William J. Moran	2/10/1993
	M.S. 2807	1906	William J. Moran	2/10/1993
	M.S. 2808	1906	William J. Moran	8/19/1998
	M.S. 2809	1906	William J. Moran	2/10/1993
	M.S. 2819	1906	W. B. Milliken	8/19/1998
	M.S. 2924	1907	Donald Cameron	8/19/1998
	M.S. 2925	1907	Donald Cameron	8/19/1998
	M.S. 3001	1907	George E. Sherer	7/12/1911
	(Note: 1911 cancellation on face of plat)			8/19/1998
	M.S. 3004	1907	George E. Sherer	2/10/1993
	M.S. 3013	1907	W. B. Milliken	8/19/1998
	M.S. 3057	1907	Donald Cameron	2/10/1993
	M.S. 3125	1907	William J. Moran	
	M.S. 3156	1907	John S. Hamman	
	M.S. 3369	1907	John S. Hamman	8/19/1998
	M.S. 3392	1907	Robert M. Cannon	8/19/1998
	M.S. 5086	1993	Earnest E. Schaaf	
	(Note: certain lodes cancelled)			11/18/1998
	M.S. 5091	1993	Brian D. Hatter	
	(Note: BEV #54 lode cancelled)			9/22/2000
	M.S. 5093	1993	Earnest E. Schaaf	
	<p>Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners and other calls of the original field note record.</p> <p>The rules of proportionate measurement, Grant boundary adjustment and record bearings and distance were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.</p> <p>The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated July 23, 1998.</p> <p>The direction of the lines refer to the true meridian as determined by use of Global Positioning System (GPS) satellite data, using the real time kinematic survey process.</p> <p>The geographic position for the southeast corner of section 23 is at Lat. 36° 52' 17.105" N. and Long. 116° 47' 18.782" W.-NAD 83 (1992), as determined by survey grade GPS receivers, in 1998, from NGS station "BEATTY AIRFIELD", located in sec. 25.</p>			

TOWNSHIP 12 SOUTH, RANGE 46 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The mean magnetic declination is 15° E., as shown on U.S.G.S. quadrangle map "BEATTY, NEV", provisional edition dated 1987.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

(Restoring the survey executed by
Deputy Surveyor O.E. Brashears in 1906)

Beginning at the cor. of secs. 23, 24, 25 and 26, perpetuated by David L. Hough, Nevada Professional Land Surveyor No. 5876, remonumented with a rebar, $\frac{3}{8}$ in. diam., 24 ins. long, firmly set 15 ins. in the ground, with aluminum cap mkd. D HOUGH 23 24 25 26 LS5876, with a steel fence post alongside, with a wooden post, 4x4 ins., 16 ins. long, laying alongside. This is accepted as a careful and faithful perpetuation of the original corner position.

Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

T12S R46E	
S23	S24
S26	S25

1998

Place rebar inside the stainless steel post and deposit the wooden post alongside.

From this point, the $\frac{1}{4}$ sec. cor. of secs. 25 and 26 bears S. 0°00'20" W., 40.205 chs. dist., remonumented by person(s) unknown with a rebar, $\frac{3}{8}$ in. diam., firmly set, projecting 3 ins. above the ground, with a steel fence post alongside, with the original pits N. and S. The S. pit has a wooden post, 4x4 ins., firmly set in the center of pit, projecting 4 ins. above the ground, illegibly mkd.

From this same point, the $\frac{1}{4}$ sec. cor. of secs. 24 and 25 bears S. 89°57'20" E., 40.065 chs. dist., monumented with the original basalt stone, 12x7 ins., firmly set, projecting 8 ins. above the ground, plainly mkd. 1/4 on the N. face, with a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of the cor., with a steel fence post alongside.

From this same point, United States Coast and Geodetic Survey triangulation station BEATTY AIRFIELD bears S. 44°24'40" E., 32.594 chs. dist., monumented with a standard brass tablet, firmly set in a 12 x 12 ins. concrete block, projecting 5 ins. above the ground, mkd. BEATTY AIRFIELD 1949.

N. 0°10'30" W., bet. secs. 23 and 24.

Over nearly level terrain with sagebrush.

11.50

Underground cable, bears N. 80° W. and S. 80° E.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 11.90	Center of improved dirt road, 30 lks. wide, bears N. 80° W. and S. 80° E.
40.231	<p>The $\frac{1}{4}$ sec. cor. of secs. 23 and 24, monumented with a basalt stone, 14x8x8 ins., firmly set 6 ins. in the ground, plainly mkd. $\frac{1}{4}$ on the W. face, with a mound of stone, 2$\frac{1}{2}$ ft. base, 2 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S23 S24</p> <p style="text-align: center;">1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°16'20" W., beginning new measurement.</p> <p>Over nearly level terrain with sagebrush.</p>
10.30	Power line, bears N. 40° W. and S. 40° E.
11.15	Center of unimproved dirt road, 30 lks. wide, bears N. 51° E. and S. 51° W.
15.90	Center line of abandoned railroad grade, 25 lks. wide, bears N. 46° W. and S. 46° E.
39.987	<p>The cor. of secs. 13, 14, 23 and 24, remonumented by David L. Hough, Nevada Professional Land Surveyor No. 5876, with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 18 ins. in the ground, with aluminum cap mkd. D HOUGH 13 14 23 24 LS 5876, with a granite stone, 15x12x8 ins. laying alongside, plainly mkd. with 3 grooves and 1 groove on adjoining faces, with a mound of stone, 2$\frac{1}{2}$ ft. base, 2 ft. high, W. of the cor., with a steel fence post alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S14 S13 ----- S23 S24</p> <p style="text-align: center;">1998</p> <p>Place rebar inside the stainless steel post and deposit original cornerstone alongside.</p> <hr style="width: 20%; margin: 10px auto;"/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS									
	<p>From the cor. of secs. 26, 27, 34 and 35, monumented with a basalt stone, 10x10x9 ins., firmly set 8 ins. in the ground, plainly mkd. with 2 notches on the E. edge and 1 notch on the S. edge, in the center of the original four pits, the outlines of which are clearly visible.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T12S R46E</td></tr> <tr><td>S27</td><td>S26</td></tr> <tr><td colspan="2">-----</td></tr> <tr><td>S34</td><td>S35</td></tr> </table> <p style="text-align: center;">1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <p>N. 0°28'00" W., bet. secs. 26 and 27.</p> <p>Over nearly level terrain with sagebrush.</p>	T12S R46E		S27	S26	-----		S34	S35
T12S R46E									
S27	S26								

S34	S35								
40.168	<p>The ¹/₄ sec. cor. of secs. 26 and 27, determined at the center of the original pits N. and S., the outlines of which are clearly visible, with a basalt stone, 10x7x6 ins., laying loose nearby, plainly mkd. 1/4. The S. pit has a wooden post, 2x2 ins., firmly set, projecting 5 ins. above the ground, mkd. illegible.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T12S R46E</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td>S27</td><td>S26</td></tr> </table> <p style="text-align: center;">1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0°02'50" W., beginning new measurement.</p> <p>Over nearly level terrain with sagebrush.</p>	T12S R46E		1/4		S27	S26		
T12S R46E									
1/4									
S27	S26								
40.248	<p>The cor. of secs. 22, 23, 26 and 27, monumented with a basalt stone, 12x12x8 ins., firmly set 7 ins. in the ground, plainly mkd. with 2 notches on the E. edge, 2 notches on the S. edge and an "X" on top, with a mound of stone, 2¹/₂ ft. base, 1¹/₂ ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>								

246

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E S22 S23 ----- S27 S26</p> <p style="text-align: center;">1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <hr/>
40.186	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 89°57'00" W., bet. secs. 23 and 26.</p> <p>Over nearly level terrain with sagebrush.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E S23 1/4 ----- S26</p> <p style="text-align: center;">1998</p>
80.372	<p>The cor. of secs. 22, 23, 26 and 27.</p> <hr/> <p>N. 0°02'20" W., bet. secs. 22 and 23.</p> <p>Over nearly level terrain with sagebrush.</p>
7.508	<p>Angle Pt. No. 15, Tract 37, hereinafter described.</p>
7.55	<p>Wire fence, bears N. 46° E. and S. 46° W.</p>
10.018	<p>Point for the S-S $\frac{1}{64}$ sec. cor. of secs. 22 and 23, and now also functions as Angle Pt. No. 16, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
20.036	<p style="text-align: center;">S-S 1/64 S22 S23</p> <p style="text-align: center;">1998</p> <p>Point for the S $\frac{1}{16}$ sec. cor. of secs. 22 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">S 1/16 S22 S23 1998</p>
28.270	<p>Intersect line 17-18, Tract 37, at a point from which Angle Pt. No. 17, hereinafter described, bears S. 43°42'50" E., 13.213 chs. dist.</p>
28.30	<p>Wire fence, bears N. 44° W. and S. 44° E.</p>
40.072	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a basalt stone, 16x8x7 ins., firmly set 9 ins. in the ground, plainly mkd. 1/4 on the W. face, in a scattered collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S22 S23 1998</p>
	<p>Deposit the original cornerstone alongside the stainless steel post and raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of the cor.</p> <p>From this point, United States Coast and Geodetic Survey bench mark "E 23" bears S. 69°10'10" E., 33.925 chs. dist., monumented with a standard brass tablet, firmly set in a concrete block, 8 x 8 ins., projecting 4 ins. above the ground, plainly mkd. E 23 1933 on top.</p>
	<p style="text-align: center;">_____</p> <p>N. 0°00'40" W., beginning new measurement.</p> <p>Over nearly level terrain with sagebrush.</p>
4.15	<p>Underground cable, bears N. 62° W. and S. 62° E.</p>
4.50	<p>Improved road, 30 lks. wide, bears N. 62° W. and S. 62° E.</p>
40.085	<p>The cor. of secs. 14, 15, 22 and 23, monumented with a basalt stone, 14x10x8 ins., firmly set 11 ins. in the ground, plainly mkd. with 2 notches on the E. edge and 3 notches on the S. edge, in a scattered collar of stone, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, 5/8 in. diam., 25 ins. long, firmly set 20 ins. in the ground alongside the basalt stone, with aluminum cap mkd. T12SR46E 14 15 22 23 RLS 4248.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T12S R46E S15 S14 <hr style="width: 50%; margin: 0 auto;"/> S22 S23 1998
	Place rebar inside the stainless steel post and deposit original cornerstone alongside.
	From the cor. of secs. 13, 14, 23 and 24.
	N. 89°58'20" W., bet. secs. 14 and 23.
	Over nearly level terrain with sagebrush.
7.40	Unimproved road, 30 lks. wide, bears N. 19° E. and S. 19° W.
26.90	Center line of abandoned railroad grade, 25 lks. wide, bears N. 66° W. and S. 66° E.
26.95	Power line, bears N. 63° W. and S. 63° E.
40.020	The 1/4 sec. cor. of secs. 14 and 23, monumented with a basalt stone, 16x8x7 ins., firmly set 11 ins. in the ground, plainly mkd. 1/4 on the N. face, with a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of the cor.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T12S R46E S14 1/4 ——— S23 1998
	Deposit the original cornerstone alongside the stainless steel post.
	S. 89°59'10" W., beginning new measurement.
	Over nearly level terrain with sagebrush.
40.054	The cor. of secs. 14, 15, 22 and 23.
	N. 0°02'00" W., bet. secs. 14 and 15.
	Over nearly level terrain with sagebrush.
12.50	Center line of abandoned railroad grade, 25 lks. wide, bears N. 70° W. and S. 70° E.
18.50	Underground pipeline, bears N. 46° E. and S. 46° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 20.291	Intersect the center line of Nevada State Highway No. 374, 48 lks. wide, bears N. 46° E. and S. 46° W., at a point from which the center line at Sta. 519+57.70, hereinafter described, bears N. 45°53'20" E., 15.898 chs. dist.
25.15	Power line, bears N. 46° E. and S. 46° W.
26.20	Power line, bears N. 46° E. and S. 46° W., enter steep reclaimed mining area.
40.200	<p>The point for the 1/4 sec. cor. of secs. 14 and 15, determined at single proportionate distance based on evidence found by David L. Hough, Nevada Professional Land Surveyor No. 5876, as shown on the Record of Survey, recorded under Reception No. 230042, in the Office of the County Clerk and Recorder, Nye County, Nevada. The original monument recovered by Mr. Hough has been obliterated and the more recent measurements to surrounding monuments by Mr. Hough is utilized to determine the original corner position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S15 S14 1998</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°00'50" E., beginning new measurement.</p> <p>Over steep reclaimed mining area.</p>
40.061	<p>The point for the cor. of secs. 10, 11, 14 and 15, determined at double proportionate distance based on evidence found by David L. Hough, Nevada Professional Land Surveyor No. 5876, as shown on the Record of Survey, recorded under Reception No. 230042, in the Office of the County Clerk and Recorder, Nye County, Nevada. The original monument recovered by Mr. Hough has been obliterated and the more recent measurements to surrounding monuments by Mr. Hough is utilized to determine the original corner position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S10 S11 ----- S15 S14 1998</p> <p>From this point, the cor. of secs. 2, 3, 10 and 11 bears N. 0°06'40" E., 79.844 chs. dist., monumented with the original granite stone, 18x8 ins., projecting 8 ins. above the ground, set in a collar of stone, 2 1/2 ft. base, 1 ft. high, plainly mkd. with 2 notches on the E. edge and 5 notches on the S. edge, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, 5/8 in. diam., loosely set alongside, projecting</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>20 ins. above the ground, with aluminum cap mkd. T12SR46E 2 3 10 11 RLS 4248, with a mound of stone, 2¹/₂ ft. base, 2 ft. high, W. of the cor.</p> <p>From this same point, a local control point established by David L. Hough, Nevada Professional Land Surveyor No. 5876 bears S. 89°47'20" E., 80.010 chs. dist., monumented with a rebar, ⁵/₈ in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. ST JOE CP 547 D HOUGH LS 5876.</p> <p>From this same point, the ¹/₄ sec. cor. of secs. 11 and 14 bears S. 89°56'00" E., 40.092 chs. dist., monumented with a basalt stone, 16x8x7 ins., firmly set 5 ins. in the ground, plainly mkd. 1/4 on the N. face, with a mound of stone, 2¹/₂ ft. base, 2 ft. high, N. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 5 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S11 1/4 ——— S14 1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p>
<p>6.75</p> <p>40.183</p>	<p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 89°56'50" W., bet. secs. 27 and 34.</p> <p>Over nearly level terrain with sagebrush.</p> <p>Dirt road, 30 lks. wide, bears N. 25° W. and S. 25° E.</p> <p>The ¹/₄ sec. cor. of secs. 27 and 34, determined at the center of the original pits E. and W., the outlines of which are clearly visible. The E. pit has a wooden post, 2 x 2 ins., 12 ins. long, plainly mkd. 1/4, laying loose alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S27 1/4 ——— S34 1998</p> <p>Deposit the wooden post alongside the stainless steel post.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS									
	<p>From this point, a position established by David L. Hough, Nevada Professional Land Surveyor No. 5876, as shown on the Record of Survey, recorded under Reception No. 230042, in the Office of the County Clerk and Recorder, Nye County, Nevada, monumented with a rebar, $\frac{3}{8}$ in. diam., firmly set, projecting 4 ins. above the ground, bears N. 27°36' W., 0.094 chs. dist. This position was purportedly based on the center of four pits and is not utilized during the course of this survey. The original monumentation calls for E. and W. pits and only two pits were found.</p> <hr/> <p>N. 89°30'50" W., beginning new measurement.</p> <p>Over nearly level terrain with sagebrush.</p>								
8.30	Power line, bears N. 60° W. and S. 60° E.								
32.95	Improved dirt road, 30 lks. wide, bears N. and S.								
33.00	Underground pipeline, bears N. and S.								
33.85	Power line, bears N. 27° E. and S. 27° W.								
40.051	<p>The cor. of secs. 27, 28, 33 and 34, monumented with a basalt stone, 12x8x6 ins., firmly set 5 ins. in the ground, plainly mkd. with 3 notches on the E. edge and 1 notch on the S. edge, in the center of the four original pits, the outlines of which are clearly visible. The SE. pit has a wooden post, 2x2 ins., firmly set, projecting 6 ins. above the ground, mkd. illegally.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table border="1" data-bbox="876 1176 1023 1291"> <tr> <td colspan="2">T12S R46E</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> <p>1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <p>From this point, a water well, 6 in. diam., bears N. 45°01' E., 10.60 chs. dist.</p> <hr/> <p>N. 0°03'10" W., bet. secs. 27 and 28.</p> <p>Over nearly level terrain with sagebrush.</p>	T12S R46E		S28	S27	<hr/>		S33	S34
T12S R46E									
S28	S27								
<hr/>									
S33	S34								
21.50	Dirt road, 30 lks. wide, bears N. 75° E. and S. 75° W.								
40.089	<p>The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a basalt stone, 10x10x6 ins., loosely set 5 ins. in the ground, with no visible mks. This is accepted as the best available evidence of the original corner position.</p>								

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S28 S27</p> <p style="text-align: center;">1998</p> <p>Deposit the unmarked stone alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°07'30" W., beginning new measurement.</p> <p>Over nearly level terrain with sagebrush.</p>
40.093	<p>The cor. of secs. 21, 22, 27 and 28, determined at the center of the remaining original NE., NW. and SE. pits, the outlines of which are clearly visible, with a granite stone, 15x9x8 ins., laying loose nearby, mkd. with 3 notches and 2 notches on adjoining edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S21 S22</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S28 S27</p> <p style="text-align: center;">1998</p> <p>Deposit the original cornerstone alongside the stainless steel post and raise a mound of stone, 2¹/₂ ft. base, 1¹/₂ ft. high, W. of the cor.</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 89°53'50" W., bet. secs. 22 and 27.</p> <p>Over nearly level terrain with sagebrush.</p>
7.865	<p>Intersect line 14-15, Tract 37, at a point from which Angle Pt. No. 14, hereinafter described, bears S. 46°22'10" W., 3.944 chs. dist.</p>
7.88	<p>Wire fence, bears N. 46° E. and S. 46° W., enter tailings pond.</p>
39.991	<p>Point for the ¹/₄ sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original corner. Point falls in a mining tailings pond, where it is impractical to establish a permanent monument.</p>
68.25	<p>Wire fence, bears N. 38° W. and S. 38° E., leave tailings pond.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
68.287	Intersect line 10-11, Tract 37, at a point from which Angle Pt. No. 10, hereinafter described, bears N. 38°07'00" W., 6.829 chs. dist.
72.60	Improved dirt road, 30 lks. wide, bears N. and S.
72.90	Underground pipeline, bears N. and S.
73.00	Power line, bears N. and S.
79.982	The cor. of secs. 21, 22, 27 and 28.
20.00	N. 0°03'40" W., bet. secs. 21 and 22. Over nearly level terrain with sagebrush. Power line, bears N. 46° E. and S. 46° W.
22.809	Intersect the center line of Nevada State Highway No. 374, 48 lks. wide, bears N. 46° E. and S. 46° W., at a point from which the center line at Sta. 369+89.27 POT, hereinafter described, bears S. 45°53'20" W., 99.563 chs. dist.
40.015	The 1/4 sec. cor. of secs. 21 and 22, monumented with a basalt stone, 16x10x8 ins., firmly set 6 ins. in the ground, plainly mkd. 1/4 on the W. face. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T12S R46E 1/4 S21 S22 1998 Deposit the original cornerstone alongside the stainless steel post. From this point, the SE. cor. of a cemetery bears N. 51°26' W., 21.13 chs. dist. and the SW. cor. of said cemetery bears N. 57°37' W., 23.01 chs. dist.
38.15	N. 0°04'30" W., beginning new measurement. Over nearly level terrain with sagebrush. Power line, bears N. 45° W. and S. 45° E.
40.029	The cor. of secs. 15, 16, 21 and 22, identical with Cor. No. 7, cancelled Rhyolite Townsite, perpetuated by David L. Hough, Professional Land Surveyor No. 5876, as shown on the Record of Survey, recorded under Reception No. 230042, in the Office of the County Clerk and Recorder, Nye County, Nevada, remonumented with a rebar, 1/2 in. diam., 15 ins. long, firmly set 13 ins. in the ground, with plastic cap mkd. LS 5876 NEVADA. This cor. was further perpetuated by Bruce L. Rice, Nevada Professional Land

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS							
	<p>Surveyor No. 4248, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 12 ins. above the ground, over the $\frac{1}{2}$ in. diam. rebar, with aluminum cap mkd. T12S R46E 15 16 21 22 RLS 4248. Both rebars were found in a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, with a basalt stone, 16x12x10 ins., laying loose in mound, plainly mkd. with 3 notches each on adjoining edges and 46 S and T12S on adjoining faces, with a steel fence post alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table border="1" data-bbox="876 604 1023 714"> <tr> <td>T12S</td> <td>R46E</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> </table> <p>1998</p> <p>Place rebars inside the stainless steel post and deposit original cornerstone alongside. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>From this point, a witness cor. for Cor. No. 7, cancelled Rhyolite Townsite, bears N. $14^{\circ}00'$ E., 0.047 chs. dist., monumented with a granite stone, 12x5 ins., firmly set, projecting 3 ins. above the ground, mkd. RCL 7 and other illegible marks on the NW. face. (Record: N. $20^{\circ}40'$ E.)</p> <p>From this same point, the NE cor. of a cemetery bears S. $47^{\circ}07'$ W., 26.60 chs. dist.</p>	T12S	R46E	S16	S15	S21	S22
T12S	R46E						
S16	S15						
S21	S22						
	<hr/>						
	<p>From the cor. of secs. 14, 15, 22 and 23.</p>						
	<p>N. $89^{\circ}58'50''$ W., bet. secs. 15 and 22.</p>						
	<p>Over nearly level terrain with sagebrush.</p>						
19.20	<p>Underground pipeline, bears N. 46° E. and S. 46° W.</p>						
20.939	<p>Intersect the center line of Nevada State Highway No. 374, 45 lks. wide, bears N. 46° E. and S. 46° W., at a point from which the center line at Sta. 519+57.70 POT, hereinafter described, bears N. $45^{\circ}53'20''$ E., 45.041 chs. dist.</p>						
25.10	<p>Power line, bears N. 46° E. and S. 46° W.</p>						
26.15	<p>Power line, bears N. 46° E. and S. 46° W.</p>						
28.00	<p>Enter congested mining factory area with buildings.</p>						
35.510	<p>Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 15 and 22.</p>						
	<p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>						

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	WC T12S R46E S15 1/4 <— S22 1998
	From this point, a steel tank, 100 ft. diam., bears E. at 1.45 chs. dist.
40.016	Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original corner. Point falls on concrete slab where it is impractical to establish a permanent monument.
	From this point, United States National Oceanic and Atmospheric Administration survey control marker "J-416" bears S. 23°53'10" E., 12.563 chs. dist., monumented with a steel rod, firmly set flush with the ground, encased in concrete, with top mkd. J416 1983.
43.668	Angle Pt. No. 4, Tract 37, hereinafter described.
49.746	Angle Pt. No. 5, Tract 37, hereinafter described.
77.40	Asphalt road, 45 lks. wide, bears N. 34° W. and S. 41° E.
80.032	The cor. of secs. 15, 16, 21 and 22.
	N. 0°05'10" W., bet. secs. 15 and 16.
	Over gently rolling terrain with sagebrush.
3.95	Asphalt road, 45 lks. wide, bears N. 28° W. and S. 34° E.
22.740	Intersect line 2-3, Mineral Survey No. 5093, Little Bev #9 lode, at a point from which Cor. No. 3, hereinafter described, bears West, 0.009 chs. dist.
25.175	Intersect line 3-4, Mineral Survey No. 2377, North Star lode, at a point from which Cor. No. 3, hereinafter described, bears N. 87°12'40" E., 4.216 chs. dist.
27.939	Intersect line 3-4, Mineral Survey No. 5093, Little Bev #9 lode, at a point from which Cor. No. 4, identical with Cor. No. 3, Mineral Survey No. 5093, Golden Age #9 lode, hereinafter described, bears N. 0°00'30" E., 3.888 chs. dist.
40.025	The point for the 1/4 sec. cor. of secs. 15 and 16, determined at single proportionate distance based on evidence found by David L. Hough, Nevada Professional Land Surveyor No. 5876, as shown on the Record of Survey, recorded under Reception No. 230042, in the Office of the County Clerk and Recorder, Nye County, Nevada. The original monument recovered by Mr. Hough has been obliterated and the more recent measurements to surrounding monuments by Mr. Hough is utilized to determine the original corner position.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E 1/4 S16 S15 1998</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°01'00" W., beginning new measurement.</p> <p>Over mountainous terrain.</p>
7.323	<p>Intersect line 1-2, Mineral Survey No. 2377, North Star lode, identical in part with a portion of line 5-4 cancelled Mineral Survey No. 2348, Hardscrabble lode, at a point from which Cor. No. 2, hereinafter described, bears N. 87°12'40" E., 0.210 chs. dist.</p>
40.061	<p>The cor. of secs. 9, 10, 15 and 16, identical with Cor. No. 8, cancelled Rhyolite Townsite, monumented with a basalt stone, 24x16x8 ins., firmly set 16 ins. in the ground, plainly mkd. with 3 grooves on the E. face and 4 grooves on the S. face, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, 5/8 in. diam., 24 ins. long, firmly set 16 ins. in the ground alongside the basalt stone, with aluminum cap mkd. T12SR46E RLS 4248 9 10 15 16, with a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S 9 S10 ----- S16 S15 1998</p> <p>Place rebar inside the stainless steel post and deposit original cornerstone alongside.</p> <p>From this point, a witness cor. for Cor. No. 8, cancelled Rhyolite Townsite, bears N. 31°00' W., 0.077 chs. dist., monumented with a basalt stone, 16x8 ins., firmly set, projecting 5 ins. above the ground, mkd. RCL 8 WC on the NW. face. (Record: N. 27°30' W.)</p> <hr style="width: 20%; margin: auto;"/>
14.259	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 89°53'30" W., bet. secs. 10 and 15.</p> <p>Over rolling, mountainous terrain.</p> <p>Intersect line 3-4, Mineral Survey No. 2784, Rand No. 2 lode, at a point from which Cor. No. 3, identical with Cor. No. 2, Mineral Survey No. 2784, Rand No. 3 lode, hereinafter described, bears N. 3°54'00" W., 11.392 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 22.726	Intersect line 1-2, Mineral Survey No. 2784, Rand No. 2 lode, at a point from which Cor. No. 2, identical with Cor. No. 3, Mineral Survey No. 2784, Rand No. 3 lode, hereinafter described, bears N. 2°47'00" W., 11.641 chs. dist.
23.585	Intersect line 4-1, Mineral Survey No. 2539, Sunset No. 1 lode, at a point from which Cor. No. 1, identical with Cor. No. 1, Mineral Survey No. 2539, Sunset No. 2 lode, hereinafter described, bears N. 7°17'00" W., 10.303 chs. dist.
28.179	Intersect line 1-2, Mineral Survey No. 5086, Ladd #3 lode, at a point from which Cor. No. 2, hereinafter described, bears South, 0.121 chs. dist.
30.038	Point selected for the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 10 and 15. Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top, over a plastic-encased magnet, with brass cap mkd. WC T12S R46E S10 1/4 <— S15 1998
	Enter mining pit.
32.607	Intersect line 2-3, Mineral Survey No. 2539, Sunset No. 1 lode, at a point from which Cor. No. 2, identical with Cor. No. 2, Mineral Survey No. 2539, Sunset No. 2 lode, hereinafter described, bears N. 8°14'30" W., 8.330 chs. dist.
40.038	Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, at proportionate distance, falls in an active mining pit where it is impractical to set a permanent monument; there is no remaining evidence of the original corner.
50.00	Enter mountainous terrain.
75.537	Intersect line 3-4, Mineral Survey No. 5093, Golden Age #17 lode, at a point from which Cor. No. 4, hereinafter described, bears N. 0°01'30" W., 1.737 chs. dist.
80.076	The cor. of secs. 9, 10, 15 and 16. <hr/> N. 0°03'50" E., bet. secs. 9 and 10. Over gently rolling terrain with sagebrush.
19.994	Point for the S $\frac{1}{16}$ sec. cor. of secs. 9 and 10. Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">S 1/16 S 9 S10</p> <p style="text-align: center;">1998</p> <p>Raise a mound of stone, 2¹/₂ ft. base, 1¹/₂ ft. high, W. of the cor.</p>
29.991	Point for the N-S ¹ / ₆₄ sec. cor. of secs. 9 and 10. Point not monumented.
33.30	Improved dirt road, 30 lks. wide, bears N. 87° E. and S. 87° W.
39.988	<p>The ¹/₄ sec. cor. of secs. 9 and 10, monumented with a trapstone, 14x10x6 ins., firmly set 6 ins. in the ground, plainly mkd. 1/4 on the W. face, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, ⁵/₈ in. diam., 26 ins. long, firmly set 12 ins. in the ground alongside the trapstone, with aluminum cap mkd. T12SR46E 9 10 RLS 4248.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S 9 S10</p> <p style="text-align: center;">1998</p> <p>Place rebar inside the stainless steel post, deposit original cornerstone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 89°55'00" W., bet. secs. 16 and 21.</p> <p>Over rolling terrain with sagebrush.</p>
0.30	Draw, drains S. 15° W.
1.70	Power line, bears N. 29° W. and S. 29° E.
30.30	Improved gravel road, 45 lks. wide, bears N. 8° W and S. 8° E.
39.25	Dirt road, 20 lks. wide, bears N. 18° W. and S. 18° E.
40.068	<p>The ¹/₄ sec. cor. of secs. 16 and 21, perpetuated by David L. Hough, Professional Land Surveyor No. 5876, remonumented with a rebar, ⁵/₈ in. diam., 15 ins. long, firmly set 13 ins. in the ground, with aluminum cap erroneously mkd. DHOUGH 1/4 S16 S22 LS 5876, with a basalt stone, 14x8x7 ins. laying alongside, no mks. visible, in a scattered mound of stone. This is accepted as a careful and faithful perpetuation of the original corner position.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 ¹ / ₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T12S R46E
	S16
	1/4 ———
	S21
	1998
	Place rebar inside the stainless steel post and deposit unmarked stone alongside. Rebuild mound of stone, 2 ¹ / ₂ ft. base, 2 ft. high, W. of the cor.
	—————
	S. 89°56'20" W., beginning new measurement.
	Over gently rolling terrain with sagebrush.
	2.00 Dirt road, 15 lks. wide, bears N. 34° E. and S. 34° W.
	39.60 Draw, drains S.
	39.783 The cor. of secs. 16, 17, 20 and 21, identical with Cor. No. 6, cancelled Rhyolite Townsite, determined at record bearing and distance from the witness cor. for Cor. No. 6, cancelled Rhyolite Townsite, and with a basalt stone, 14x12x8 ins., laying loose in a scattered collar of stone, plainly mkd. with 3 notches and 4 notches on adjoining edges
	from which the original witness cor.
	A basalt stone, 16x8 ins., bears N. 42°15' E., 0.076 chs. dist., firmly set, projecting 5 ins. above the ground, mkd. WC on top, RCL on the NE. face and 6 on the SW. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 ¹ / ₂ ins. diam., 23 ins. in the ground, with brass cap mkd.
	T12S R46E
	S17 S16
	—————
	S20 S21
	1998
	Deposit the original cornerstone alongside the stainless steel post and raise a mound of stone, 3 ¹ / ₂ ft. base, 2 ft. high, W. of the cor.
	From this point, a rebar, 1/2 in. diam., firmly set by person(s) unknown, projecting 4 ins. above ground, bears N. 8°48' W., 0.057 chs. dist. This rebar was not utilized during the course of this survey.
	—————
	N. 0°07'30" E., bet. secs. 16 and 17.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Over gently rolling terrain with sagebrush.
14.20	Improved dirt road, 25 lks. wide, bears N. 79° E. and S. 79° W.
25.997	Intersect line 3-4, Mineral Survey No. 2673, Salt Lake lode, at a point from which Cor. No. 4, hereinafter described, bears N. 72°48'20" W., 3.803 chs. dist.
40.032	<p>The 1/4 sec. cor. of secs. 16 and 17, identical with Cor. No. 5, cancelled Rhyolite Townsite, monumented with a granite stone, 16x8x8 ins., firmly set 10 ins. in the ground, plainly mkd. 1/4 on the W. face, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, 5/8 in. diam., 25 ins. long, firmly set 16 ins. in the ground alongside the granite stone, with aluminum cap erroneously mkd. T12SR46E 17 18 RLS 4248, with a scattered mound of stone SE. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E 1/4 S17 S16 1998</p> <p>Place rebar inside the stainless steel post and deposit original cornerstone alongside. Rebuild mound of stone, 2 1/2 ft. base, 2 ft. high, W. of the cor.</p> <p>From this point, a witness cor. for Cor. No. 5, cancelled Rhyolite Townsite, bears N. 45°30' E., 0.071 chs. dist., monumented with a quartzite stone, 15x12 ins., firmly set, projecting 14 ins. above the ground, mkd. RCL WC on the SE. face. (Record: N. 41°00' E.)</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°42'50" W., beginning new measurement.</p> <p>Over gently rolling terrain.</p>
6.825	Intersect line 6-1, Mineral Survey No. 2673, Salt Lake lode, at a point from which Cor. No. 1, hereinafter described, bears S. 72°58'00" E., 3.340 chs. dist.
13.50	Power line, bears N. 60° W. and S. 60° E.
29.635	Intersect line 4-5, Mineral Survey No. 2530, Denver No. 2 lode, at a point from which Cor. No. 5, hereinafter described, bears N. 80°04'50" W., 1.311 chs. dist.
39.681	<p>The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 24x9x7 ins., loosely set 3 ins. in the ground, in a collar of stone, 2 ft. base, to top, plainly mkd. with 4 notches on the E. edge and 4 notches on the S. edge, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, 5/8 in. diam., 24 ins. long, firmly set 12 ins. in the ground alongside the basalt stone, with aluminum cap mkd. T12SR46E 8 9 16 17 RLS 4248.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS									
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 3 ins. in the ground, over a plastic-encased magnet and in a collar of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T12S R46E</td> </tr> <tr> <td style="text-align: center;">S 8</td> <td style="text-align: center;">S 9</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S17</td> <td style="text-align: center;">S16</td> </tr> </table> <p style="text-align: center;">1998</p> <p>Place rebar inside the stainless steel post and deposit original cornerstone in collar of stone.</p> <p>Cor. is located at base of 25 ft. high rock face, bears N. and S.</p> <hr/>	T12S R46E		S 8	S 9	-----		S17	S16
T12S R46E									
S 8	S 9								

S17	S16								
	<p>From the cor. of secs. 9, 10, 15 and 16.</p>								
	<p>N. 89°52'50" W., bet. secs. 9 and 16.</p>								
	<p>Over gently rolling terrain.</p>								
16.45	<p>Power line, bears N. 3° E. and S. 3° W.</p>								
19.65	<p>Asphalt road, 45 lks. wide, bears N. and S.</p>								
19.974	<p>Point for the E ¹/₁₆ sec. cor. of secs. 9 and 16.</p>								
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td style="text-align: center;">S 9</td> </tr> <tr> <td style="text-align: center;">E 1/16</td> <td style="text-align: center;">-----</td> </tr> <tr> <td></td> <td style="text-align: center;">S16</td> </tr> </table>		S 9	E 1/16	-----		S16		
	S 9								
E 1/16	-----								
	S16								
	<p style="text-align: center;">1998</p>								
	<p>From this point, the SE. cor. of the remains of a stone building, 18x20 ft., bears S. 73° E., 0.80 chs. dist.</p>								
	<p>From this same point the SW. cor. of the remains of a stone building, 18x24 ft., bears S. 52° W., 0.38 chs. dist.</p>								
29.773	<p>Intersect line 2-3, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, at a point from which Cor. No. 2, hereinafter described, bears S. 12°37'40" E., 6.677 chs. dist.</p>								
39.107	<p>Intersect line 4-1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with line 3-2, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 4, identical with Cor. No. 3, Mineral Survey No. 2585, Cyclops lode, hereinafter described, bears N. 12°37'40" W., 10.828 chs. dist.</p>								
39.40	<p>Dirt road, 18 lks. wide, bears N. 30° W. and S. 30° E.</p>								

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 39.948</p>	<p>The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, monumented with a basalt stone, 22x10x6 ins., firmly set 12 ins. in the ground, plainly mkd. $\frac{1}{4}$ on the W. face, in a scattered collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S 9 $\frac{1}{4}$ ——— S16 1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. $89^{\circ}12'00''$ W., beginning new measurement.</p> <p>Over mountainous terrain.</p>
8.455	<p>Intersect line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, identical in part with a portion of line 4-1, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 2, hereinafter described, bears N. $12^{\circ}38'00''$ W., 5.736 chs. dist.</p>
15.968	<p>Intersect line 1-2, Mineral Survey No. 2449, Tramp No. 2 lode, at a point from which Cor. No. 2, identical with Cor. No. 5, cancelled Mineral Survey No. 2344, Twirler Lode, hereinafter described, bears S. $11^{\circ}51'30''$ E., 7.153 chs. dist.</p>
16.070	<p>Intersect line 5-1, cancelled Mineral Survey No. 2344, Twirler lode, at a point from which Cor. No. 1, hereinafter described, bears N. $12^{\circ}39'30''$ W., 4.164 chs. dist.</p>
24.738	<p>Intersect line 3-4, Mineral Survey No. 2449, Tramp No. 2 lode, identical with a portion of line 1-2, Mineral Survey No. 2450, Tiger Lode, at a point from which Cor. No. 4, identical with Cor. No. 2, Mineral Survey No. 2430, Denver Fraction lode and Cor. No. 1, Mineral Survey No. 2450, Tiger lode, hereinafter described, bears N. $18^{\circ}28'00''$ W., 0.411 chs. dist.</p>
40.227	<p>The cor. of secs. 8, 9, 16 and 17.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. $0^{\circ}06'40''$ W., bet. secs. 8 and 9.</p> <p>Over mountainous terrain.</p>
23.125	<p>Intersect line 1-2, Mineral Survey No. 2530, Venture lode, at a point from which Cor. No. 2, hereinafter described, bears N. $87^{\circ}14'10''$ E., 2.433 chs. dist.</p>
39.776	<p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, reestablished by Earnest E. Schaaf, Nevada Professional Land Surveyor No. 10320, monumented with an aluminum post, $2\frac{1}{2}$ ins. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E S 8 S 9 1/4 1995 RLS 10320</p> <p>This is accepted as a careful and faithful reestablishment of the original corner position. Not remonumented.</p> <hr/> <p>N. 0°07'20" W., beginning new measurement.</p> <p>Over mountainous terrain.</p>
20.558	Intersect line 1-2, Mineral Survey No. 2339, Stella M. lode, at a point from which Cor. No. 2, hereinafter described, bears S. 27°04'20" W., 2.807 chs. dist.
23.207	Intersect line 3-4, Mineral Survey No. 2576, Waterloo lode, at a point from which Cor. No. 3, hereinafter described, bears N. 89°05'30" W., 1.675 chs. dist.
27.638	Intersect line 4-1, Mineral Survey No. 2339, Stella M. lode, at a point from which Cor. No. 1, hereinafter described, bears S. 62°53'50" E., 3.235 chs. dist.
39.774	<p>The cor. of secs. 4, 5, 8 and 9, perpetuated by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, remonumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 8 ins. in the ground, with aluminum cap mkd. T12SR46E 4 5 8 9 RLS 4248, with a rhyolite stone, 18x10x8 ins., mkd. with 5 notches and 4 notches on adjoining edges, laying alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S 5 S 4 ----- S 8 S 9 1998</p> <p>Place rebar inside the stainless steel post and deposit original cornerstone alongside.</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, monumented with a rhyolite boulder, 8x3 ft., $1\frac{1}{2}$ ft. high., dimly mkd. with a chiseled "X" on top and 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a brass tablet, $3\frac{1}{4}$ ins. diam., $3\frac{1}{2}$-in. stem, in drill hole of rock boulder, encased in concrete, with top mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E S4 1/4 ——— S9 2000</p>
	<p>From this point, U.S.G.S. triangulation station "Busch", monumented with a brass tablet, 3¹/₄ ins. diam., firmly set flush on rock outcrop, with top mkd. B.M., with a granite stone, 24x18x12 ins., laying loose alongside, plainly mkd. with a chiseled "X" on top and USLM 171 on adjoining face, bears N. 88°32'30" W., 22.089 chs. dist.</p> <p>S. 88°33'30" W., bet. secs. 4 and 9.</p> <p>Over mountainous terrain.</p>
2.002	Intersect line 2-3, Mineral Survey No. 2649, Noble Nan lode, at a point from which Cor. No. 2, hereinafter described, bears S. 2°58'10" W., 1.755 chs. dist.
11.121	Intersect line 4-1, Mineral Survey No. 2649, Noble Nan lode, at a point from which Cor. No. 1, hereinafter described, bears S. 2°55'50" W., 1.796 chs. dist.
25.826	Intersect line 4-1, Mineral Survey No. 2576, Eva Bell lode, at a point from which Cor. No. 1, hereinafter described, bears N. 0°55'20" E., 7.773 chs. dist.
28.533	Intersect line 3-4, Snowy Range lode (unsurveyed), at a point from which Cor. No. 3, hereinafter described, bears N. 4°29'10" E., 2.195 chs. dist.
40.232	The cor. of secs. 4, 5, 8 and 9.
<hr/> <p>DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2339, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
<p>(Restoring the survey executed by W. B. Milliken in 1905)</p> <hr/>	
<p>Stella M. lode</p>	
<p>From Cor. No. 1, Mineral Survey No. 2339, Stella M. lode, monumented with a rhyolite stone, 14x12 ins., firmly set, projecting 9 ins. above the ground, plainly mkd. with a chiseled "X" on top and 1-2339 on the SW. face. Not remonumented.</p> <p>Thence S. 27°04'20" W., on line 1-2, Mineral Survey No. 2399, Stella M. lode.</p>	
3.344	Intersect line 3-4, Mineral Survey No. 2576, Water Loo lode, at a point from which Cor. No. 3, hereinafter described, bears N. 89°05'30" W., 3.024 chs. dist.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2339,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 6.296	Intersect the line bet. secs. 8 and 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, hereinbefore described, bears S. $0^{\circ}07'20''$ E., 20.558 chs. dist.
9.103	Point for Cor. No. 2, Mineral Survey No. 2339, Stella M. lode, determined by the method of parallel end lines and side lines; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.

	Thence N. $62^{\circ}53'50''$ W., on line 2-3, Mineral Survey No. 2339, Stella M. lode.
21.966	Cor. No. 3, Mineral Survey No. 2339, Stella M. lode, monumented with a granite stone, 14x10 ins., firmly set, projecting 10 ins. above the ground, plainly mkd. with a chiseled "X" on top and 3-2339 on the NE. face. Not remonumented.
	Cor. is located 0.15 chs. W. of a draw, drains S. 45° W.

	Thence N. $27^{\circ}04'20''$ E., on line 3-4, Mineral Survey No. 2339, Stella M. lode.
9.103	Cor. No. 4, Mineral Survey No. 2339, Stella M. lode, monumented with a rhyolite stone, 12x8 ins., firmly set, projecting 8 ins. above the ground, plainly mkd. with a chiseled "X" on top and 4-2339 on the SW. face. Not remonumented.

	Thence S. $62^{\circ}53'50''$ E., on line 4-1, Mineral Survey No. 2339, Stella M. lode.
18.731	Intersect the line bet. secs. 8 and 9, at a point from which the cor. of secs. 8, 9, 16 and 17, hereinbefore described, bears N. $0^{\circ}07'20''$ W., 12.136 chs. dist.
21.966	Cor. No. 1, Mineral Survey No. 2339, Stella M. lode, and the place of beginning.

	DEPENDENT RESURVEY OF A PORTION OF CANCELLED MINERAL SURVEY NO. 2344, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

	(Restoring the survey executed by W.B. Milliken in 1905)

	cancelled Twirler lode
	From Cor. No. 1, cancelled Mineral Survey No. 2344, Twirler lode, on line 3-4, Mineral Survey No. 2422, Quartzite Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.
	At the corner point in the center of the mound of stone

266

DEPENDENT RESURVEY OF A PORTION OF
 CANCELLED MINERAL SURVEY NO. 2344,
 T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12SR46E</p> <p style="text-align: center;">MS 2422 QFL</p> <p style="text-align: center;">MS 2449 T.L. NO. 2</p> <p style="text-align: center;">MS 2449 T.L. NO. 2</p> <p style="text-align: center;">COR 1 TL MS 2344</p> <p style="text-align: center;">2000</p> <p>Thence N. 77°17'30" E., on line 1-2, cancelled Mineral Survey No. 2344, Twirler lode, identical in part with a portion of line 4-3, Mineral Survey No. 2422, Quartzite Fraction lode.</p>
0.15	Wire fence, bears N. 65° E. and S. 65° W.
0.158	Intersect line 1-2, Mineral Survey No. 2449, Tramp No. 2 lode, at a point from which Cor. No. 1, hereinafter described, bears N. 11°51'30" W., 9.799 chs. dist.
2.00	Wire fence, bears S. 25° E. and N. 25° W.
6.596	Cor. No. 3, Mineral Survey No. 2422, Quartzite Fraction lode, identical with Cor. No. 1, Mineral Survey No. 2585, Terry Mine lode, on line 1-2, cancelled Mineral Survey No. 2344, Twirler lode, monumented with a rhyolite stone, 14x12 ins., firmly set, projecting 13 ins. above the ground, plainly mkd. with a chiseled "X" on top and 3-2433 on the N. face. Not remonumented.
	Continue measurement on line 1-2, cancelled Mineral Survey No. 2344, Twirler lode, identical in part with a portion of line 1-2, Mineral Survey No. 2585, Terry Mine lode.
7.455	Cor. No. 2, cancelled Mineral Survey No. 2344, Twirler lode, on line 4-1, Mineral Survey No. 2585, Cyclops lode, a point on solid bedrock, dimly mkd. with a chiseled "X" at the corner point and 44 alongside, there being no other marks visible.
	<p>At the corner point</p> <p>Set a brass tablet, 3¹/₄ ins. diam., 3¹/₂-in. stem, in drill hole of porphyry overflow, encased in concrete, with top mkd.</p> <p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2585 TML</p> <p style="text-align: center;">COR 2 TL MS 2344</p> <p style="text-align: center;">MS 2585 CL MS 2585 CL</p> <p style="text-align: center;">2000</p>

DEPENDENT RESURVEY OF A PORTION OF
 CANCELLED MINERAL SURVEY NO. 2344,
 T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence S. 12°38'00" E., on a portion of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, identical with a portion of line 4-1, Mineral Survey No. 2585, Cyclops lode.
5.736	Intersect the line bet. secs. 9 and 16, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, hereinbefore described, bears N. 89°12'00" E., 8.455 chs. dist.
10.646	Intersect line 4-1, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 1, hereinafter described, bears N. 82°25'40" E., 2.330 chs. dist.
13.733	The northeasterly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode.
	Continue measurement on a portion of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, identical with a portion of line 4-1, Mineral Survey No. 2585, Cyclops lode and the easterly bdy. of Tract A.
19.482	Intersect line 2-3, Mineral Survey No. 2457, Hobo lode, and the southeasterly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinafter described, bears N. 82°25'40" E., 3.244 chs. dist.
	Continue measurement on a portion of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, identical with a portion of line 4-1, Mineral Survey No. 2585, Cyclops lode.
19.528	Cor. No. 1, Mineral Survey No. 2585, Cyclops lode, hereinafter described.
	<hr/> From Cor. No. 3, cancelled Mineral Survey No. 2344, Twirler lode, monumented with a porphyry stone, 10x6 ins., firmly set, projecting 8 ins. above the ground, plainly mkd. with a chiseled "X" on top and 3-2344 on the N. face. Not remonumented.
	Thence S. 77°17'30" W., on line 3-4, cancelled Mineral Survey No. 2344, Twirler lode.
4.958	Intersect line 1-2, Mineral Survey No. 2451, Tramp No. 1 lode, at a point from which Cor. No. 1, hereinafter described, bears N. 18°28'00" W., 4.610 chs. dist.
5.573	Point for Cor. No. 4, cancelled Mineral Survey No. 2344, Twirler lode, determined by the method of parallel end lines and record distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.
	<hr/> Thence N. 23°51'30" W., on line 4-5, cancelled Mineral Survey No. 2344, Twirler lode.
1.889	Intersect line 2-3, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 3, identical with Cor. No. 6, Mineral Survey No. 2451, Tramp No. 1 lode, hereinafter described, bears S. 82°25'40" W., 8.414 chs. dist.

268

DEPENDENT RESURVEY OF A PORTION OF
 CANCELLED MINERAL SURVEY NO. 2344,
 T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 4.447	<p>Intersect line 6-1, Mineral Survey No. 2451, Tramp No. 1 lode, and the westerly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 1, hereinafter described, N. 64°44'00" E., 1.036 chs. dist.</p> <p>Continue measurement on line 4-5, cancelled Mineral Survey No. 2344, Twirler lode, identical with a portion of the westerly bdy. of Tract A.</p>
7.855	<p>The northwesterly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode.</p> <p>Continue measurement on line 4-5, cancelled Mineral Survey No. 2344, Twirler lode.</p>
9.645	<p>Point for Cor. No. 5, cancelled Mineral Survey No. 2344, Twirler lode, identical with Cor. No. 2, Mineral Survey No. 2449, Tramp No. 2 lode, determined by the method of grant boundary adjustment; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.</p>
	<hr/>
	<p>Thence N. 12°39'30" W., on line 5-1, cancelled Mineral Survey No. 2344, Twirler lode.</p>
1.362	<p>Intersect line 4-1, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 4, hereinafter described, bears S. 82°25'40" W., 7.813 chs. dist.</p>
7.173	<p>Intersect the line bet. secs. 9 and 16, at a point from which the cor. of secs. 8, 9, 16 and 17, hereinbefore described, bears S. 89°12'00" W., 24.157 chs. dist.</p>
11.30	<p>Wire fence, bears N. 65° E. and S. 65° W.</p>
11.337	<p>Cor. No. 1, cancelled Mineral Survey No. 2344, Twirler lode, on line 3-4, Mineral Survey No. 2422, Quartzite Fraction lode.</p>
	<hr/>
	<p>DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<hr/>
	<p>(Restoring the survey executed by Robert M. Cannon in 1906)</p>
	<hr/>
	<p>Gem Fraction lode</p>
	<p>From Cor. No. 1, Mineral Survey No. 2377, Gem Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">S16</p> <div style="text-align: center;"> </div> <p style="text-align: center;">1998</p> <p>Thence N. 83°07'10" E., on line 1-2, Mineral Survey No. 2377, Gem Fraction lode.</p>
<p>0.213</p>	<p>Cor. No. 2, Mineral Survey No. 2377, Gem Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
<p>4.923</p>	<p style="text-align: center;">T12S R46E</p> <div style="text-align: center;"> </div> <p style="text-align: center;">1998</p> <p>Cor. is located 0.03 chs. E. of a draw, drains S. 10° E.</p> <hr style="width: 30%; margin: 0 auto;"/> <p>Thence S. 22°48'10" E., on line 2-3, Mineral Survey No. 2377, Gem Fraction lode.</p> <p>Cor. No. 3, Mineral Survey No. 2377, Gem Fraction lode, identical with Cor. No. 5, cancelled Mineral Survey No. 2348, Hardscrabble lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p style="text-align: center;">1998</p> <hr style="width: 30%; margin: 0 auto;"/>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS					
0.281	<p>Thence N. 87°12'40" E., on line 3-4, Mineral Survey No. 2377, Gem Fraction lode, identical with a portion of line 5-4, cancelled Mineral Survey No. 2348, Hardscrabble lode.</p> <p>Cor. No. 4, Mineral Survey No. 2377, Gem Fraction lode, identical with Cor. No. 1, Mineral Survey No. 2377, North Star lode, on line 4-5, cancelled Mineral Survey No. 2348, Hard Scrabble lode, monumented with the decayed remains of a wooden post, encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E MS 2348 HL</p> <hr style="width: 100%;"/> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">COR 4 GFL MS 2377</td> <td style="border-left: 1px solid black; padding: 0 10px;">COR 1 NSL MS 2377</td> </tr> </table> <p>1998</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr style="width: 30%; margin: 20px auto;"/> <p>Thence S. 10°22'40" E., on line 4-5, Mineral Survey No. 2377, Gem Fraction lode, identical with a portion of line 1-4, Mineral Survey No. 2377, North Star lode.</p>	COR 4 GFL MS 2377	COR 1 NSL MS 2377		
COR 4 GFL MS 2377	COR 1 NSL MS 2377				
1.513	<p>Cor. No. 5, Mineral Survey No. 2377, Gem Fraction lode, on line 4-1, Mineral Survey No. 2377, North Star lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">MS 2377 GFL COR 5</td> <td style="border-left: 1px solid black; padding: 0 10px;">MS 2377</td> </tr> </table> <hr style="width: 100%;"/> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">S16 T12S R46E</td> <td style="border-left: 1px solid black; padding: 0 10px;">NSL</td> </tr> </table> <p>1998</p> </div> <hr style="width: 30%; margin: 20px auto;"/>	MS 2377 GFL COR 5	MS 2377	S16 T12S R46E	NSL
MS 2377 GFL COR 5	MS 2377				
S16 T12S R46E	NSL				

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
0.753	<p>Thence S. 79°27'50" W., on line 5-6, Mineral Survey No. 2377, Gem Fraction lode.</p> <p>Cor. No. 6, Mineral Survey No. 2377, Gem Fraction lode, monumented with the decayed remains of a wooden post, encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit the original wooden post remains alongside the stainless steel post.</p>
0.758	<p>Thence S. 9°56'50" E., on line 6-7, Mineral Survey No. 2377, Gem Fraction lode.</p> <p>Cor. No. 7, Mineral Survey No. 2377, Gem Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div>
0.759	<p>Thence N. 79°37'00" E., on line 7-8, Mineral Survey No. 2377, Gem Fraction lode.</p> <p>Cor. No. 8, Mineral Survey No. 2377, Gem Fraction lode, on line 4-1, Mineral Survey No. 2377, North Star lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p>

272

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="812 357 1088 609" style="text-align: center;"> <p>T12S R46E S16 COR 8 GFL MS 2377 MS 2377 NSL 1998</p> </div> <hr/> <p>Thence S. 10°22'40" E., on line 8-9, Mineral Survey No. 2377, Gem Fraction lode, identical in part with a portion of line 1-4, Mineral Survey No. 2377, North Star lode.</p>
10.071	<p>Cor. No. 9, Mineral Survey No. 2377, Gem Fraction lode, on line 4-1, Mineral Survey No. 2377, North Star lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="779 1029 1088 1281" style="text-align: center;"> <p>MS 2377 GFL COR 9 MS 2377 NSL S16 T12S R46E 1998</p> </div> <hr/> <p>Deposit the original wooden post remains alongside the stainless steel post.</p>
6.240	<p>Thence S. 89°22'40" W., on line 9-10, Mineral Survey No. 2377, Gem Fraction lode, identical in part with line 1-2, cancelled Mineral Survey No. 2454, Big Four No. 4 lode.</p> <p>Point for Cor. No. 10, Mineral Survey No. 2377, Gem Fraction lode, on line 1-2, cancelled Mineral Survey No. 2454, Big Four No. 4 lode, determined at the intersection of record distances; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
	<p style="text-align: center;">T12S / MS 2377 R46E / GFL S16 / COR 10</p> <p style="text-align: center;">1998</p> <p>From this point, a U.S. Geological Survey Bench Mark bears S. 65°06'10" W., 1.524 chs. dist., monumented with a brass disk, 3¹/₄ ins. diam., firmly set in a concrete post, 8x8 ins., projecting 10 ins. above the ground, with top mkd. ELEVATION ABOVE SEA 3569.658 FEET DATUM B 100 BM.</p> <hr/> <p>Thence N. 5°31'00" E., on line 10-1, Mineral Survey No. 2377, Gem Fraction lode.</p>
16.787	<p>Cor. No. 1, Mineral Survey No. 2377, Gem Fraction lode, and the place of beginning.</p> <hr/> <p style="text-align: center;">North Star lode</p> <p>From Cor. No. 1, Mineral Survey No. 2377, North Star lode, identical with Cor. No. 4, Mineral Survey No. 2377, Gem Fraction lode, hereinbefore described, on line 4-5, cancelled Mineral Survey No. 2348, Hardscrabble lode.</p> <p>Thence N. 87°12'40" E., on line 1-2, Mineral Survey No. 2377, North Star lode, identical in part with a portion of line 5-4, cancelled Mineral Survey No. 2348, Hardscrabble lode.</p>
8.863	<p>Intersect the line bet. secs. 15 and 16, at a point from which the ¹/₄ sec. cor. of secs. 15 and 16, hereinbefore described, bears S. 0°01'00" E., 7.323 chs. dist.</p>
8.884	<p>Intersect line 3-4, Mineral Survey No. 5093, Golden Age #9 lode, at a point from which Cor. No. 4, hereinafter described, bears North, 7.209 chs. dist.</p>
8.898	<p>Cor. No. 4, cancelled Mineral Survey No. 2348, Hardscrabble lode, on line 1-2, Mineral Survey No. 2377, North Star lode, monumented with a wooden post, 4x4 ins., 4 ft. long, loosely set in a mound of stone, mkd. 4-2348.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2348 / MS 5093 HL / GA #9L COR 4</p> <hr/> <p style="text-align: center;">NSL MS 2377</p> <p style="text-align: center;">1998</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

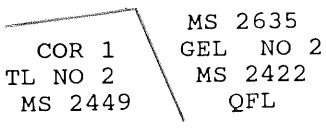
CHAINS										
	<p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <p>Cor. is located 0.07 chs. W. of reclaimed mining area, bears N. and S.</p> <p>Continue measurement on line 1-2, Mineral Survey No. 2377, North Star lode.</p>									
9.073	<p>Point for Cor. No. 2, Mineral Survey No. 2377, North Star lode, determined at record distance from Cor. No. 4, cancelled Mineral Survey No. 2348, Hardscrabble lode and on the extension of the line from Cor. No. 1, Mineral Survey 2377, North Star lode to Cor. No. 4, cancelled Mineral Survey No. 2348, Hardscrabble lode. Not monumented.</p>									
	<p>Thence S. 10°22'40" E., on line 2-3, Mineral Survey No. 2377, North Star lode.</p>									
22.343	<p>Point for Cor. No. 3, Mineral Survey No. 2377, North Star lode, determined by the method of parallel end lines and side lines; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>									
	<p style="text-align: center;">T12S R46E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;">MS 2377</td> <td style="border-left: 1px solid black; padding: 5px;"></td> <td style="text-align: center; padding: 5px;">MS 5093</td> </tr> <tr> <td style="text-align: center; padding: 5px;">NSL</td> <td style="border-left: 1px solid black; padding: 5px;"></td> <td style="text-align: center; padding: 5px;">LB #9L</td> </tr> <tr> <td style="text-align: center; padding: 5px;">COR 3</td> <td style="border-left: 1px solid black; padding: 5px;"></td> <td></td> </tr> </table> <p style="text-align: center;">1998</p>	MS 2377		MS 5093	NSL		LB #9L	COR 3		
MS 2377		MS 5093								
NSL		LB #9L								
COR 3										
	<p>Cor. is located 3.00 chs. E. of reclaimed mining area, bears N. and S.</p> <p>Thence S. 87°12'40" W., on line 3-4, Mineral Survey No. 2377, North Star lode.</p>									
4.216	<p>Intersect the line bet. secs. 15 and 16, at a point from which the ¹/₄ sec. cor. of secs. 15 and 16, hereinbefore described, bears N. 0°05'10" W., 14.850 chs. dist.</p>									
4.221	<p>Intersect line 3-4, Mineral Survey No. 5093, Little Bev #9 lode, at a point from which Cor. No. 3, hereinafter described, bears S. 0°00'30" W., 2.435 chs. dist.</p>									
9.073	<p>Cor. No. 4, Mineral Survey No. 2377, North Star lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>									

275

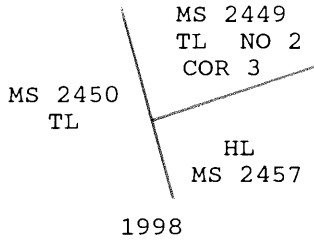
DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2377,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;">  <p>MS 2377 NSL COR 4</p> </div> <p>S16</p> <p>T12S R46E</p> <p>1998</p> <hr/>
	<p>Thence N. 10°22'40" W., on line 4-1, Mineral Survey No. 2377, North Star lode.</p>
9.999	<p>Cor. No. 9, Mineral Survey No. 2377, Gem Fraction lode, hereinbefore described.</p> <p>Continue measurement on line 4-1, Mineral Survey No. 2377, North Star lode, identical with line 9-8, Mineral Survey No. 2377, Gem Fraction lode.</p>
20.070	<p>Cor. No. 8, Mineral Survey No. 2377, Gem Fraction lode, hereinbefore described.</p> <p>Continue measurement on line 4-1, Mineral Survey No. 2377, North Star lode.</p>
20.830	<p>Cor. No. 5, Mineral Survey No. 2377, Gem Fraction lode, hereinbefore described.</p> <p>Continue measurement on line 4-1, Mineral Survey No. 2377, North Star lode, identical with line 5-4, Mineral Survey No. 2377, Gem Fraction lode.</p>
22.343	<p>Cor. No. 1, Mineral Survey No. 2377, North Star lode, identical with Cor. No. 4, Mineral Survey No. 2377, Gem Fraction lode, and the place of beginning.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2449, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by George E. Sherer in 1905)</p> <hr/> <p style="text-align: center;">Tramp No. 2 lode</p> <p>From Cor. No. 5, Mineral Survey No. 2449, Tramp No. 2 lode, a point on solid bedrock, plainly mkd. with a chiseled "X" at the corner point and 5-2449 alongside, with a mound of stone, 2¹/₂ ft. base, 2 ft. high, S. of the cor.</p> <p>from which the original bearing object</p> <p style="padding-left: 40px;">A "X BR 5-2449" chiseled on a rock outcrop bears N. 79°25' E., 0.480 chs. dist.</p> <p>Not remonumented.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2449,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
8.623	<p>Thence N. 79°23'50" E., on line 5-1, Mineral Survey No. 2449, Tramp No. 2 lode.</p> <p>Cor. No. 1, Mineral Survey No. 2449, Tramp No. 2 lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E</p> <div style="text-align: center;">  <p>MS 2635 GEL NO 2 MS 2422 QFL</p> </div> <p style="text-align: center;">1998</p> <hr/> <p>Thence S. 11°51'30" E., on line 1-2, Mineral Survey No. 2449, Tramp No. 2 lode.</p>
9.799	<p>Intersect line 1-2, cancelled Mineral Survey No. 2344, Twirler lode, identical in part with a portion of line 3-4, Mineral Survey No. 2422, Quartsite Fraction lode, at a point from which Cor. No. 1, hereinbefore described, bears S. 77°17'30" W., 0.158 chs. dist.</p>
9.80	<p>Wire fence, bears N. 65° E. and S. 65° W.</p>
13.985	<p>Intersect the line bet. secs. 9 and 16, at a point from which the ¹/₄ sec. cor. of secs. 9 and 16, hereinbefore described, bears N. 89°12'00" E., 15.968 chs. dist.</p>
19.778	<p>Intersect line 4-1, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 4, hereinafter described, bears S. 82°25'40" W., 7.832 chs. dist.</p>
21.138	<p>The point for Cor. No. 2, Mineral Survey No. 2449, Tramp No. 2 lode, identical with Cor. No. 5, cancelled Mineral Survey No. 2344, Twirler lode, hereinbefore described.</p> <hr/> <p>Thence S. 79°23'50" W., on line 2-3, Mineral Survey No. 2449, Tramp No. 2 lode.</p>
7.606	<p>Point for Cor. No. 3, Mineral Survey No. 2449, Tramp No. 2 lode, on line 1-2, Mineral Survey No. 2450, Tiger lode and on line 3-4, Mineral Survey No. 2457, Hobo lode, determined by the method of parallel end lines and record bearing; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2449,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

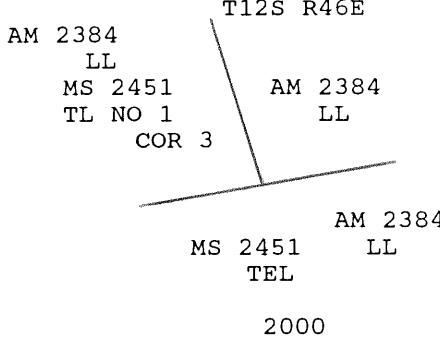
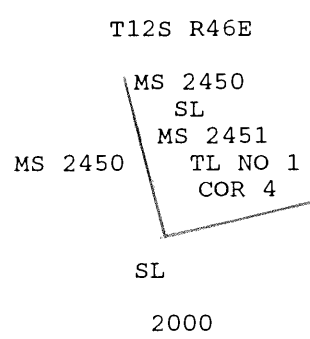
CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>
	<p>Cor. is located 1.20 chs. W. of W. edge of active mining pit.</p>
	<p>Thence N. 18°28'00" W., on line 3-4, Mineral Survey No. 2449, Tramp No. 2 lode, identical with a portion of line 2-1, Mineral Survey No. 2450, Tiger lode and in part with line 3-4, Mineral Survey No. 2457, Hobo lode.</p>
1.791	<p>Cor. No. 4, Mineral Survey No. 2457, Hobo lode, hereinafter described.</p>
	<p>Continue measurement on line 3-4, Mineral Survey No. 2449, Tramp No. 2 lode, identical with a portion of line 2-1, Mineral Survey No. 2450, Tiger lode.</p>
8.729	<p>Intersect the line bet. secs. 9 and 16, at a point from which the cor. of secs. 8, 9, 16 and 17, hereinbefore described, bears S. 89°12'00" W., 15.489 chs. dist.</p>
9.140	<p>Cor. No. 4, Mineral Survey No. 2449, Tramp No. 2 lode, identical with Cor. No. 2, Mineral Survey No. 2430, Denver Fraction lode and Cor. No. 1, Mineral Survey No. 2450, Tiger lode, a point on solid quartzite bedrock, plainly mkd. with a chiseled "X" at the corner point and 4-2449, 2-2430 and 1-2450 on the S. face, with a mound of stone, 2½ ft. base, 2 ft. high, N. of the cor. Not remonumented.</p>
<p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>	
<p>(Restoring the survey executed by George E. Sherer in 1905)</p>	
<p>Tramp No. 1 lode</p>	
	<p>From the point for Cor. No. 6, Mineral Survey No. 2451, Tramp No. 1 lode, identical with Cor. No. 3, Mineral Survey No. 2457, Hobo lode, hereinafter described.</p>
8.078	<p>Thence N. 64°44'00" E., on line 6-1, Mineral Survey No. 2451, Tramp No. 1 lode.</p> <p>Intersect line 4-5, cancelled Mineral Survey No. 2344, Twirler lode, and the westerly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode, at a point</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

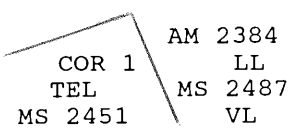

CHAINS	
	<p>from which Cor. No. 4, hereinbefore described, bears S. 23°51'30" E., 4.447 chs. dist.</p>
	<p>Continue measurement on line 6-1, Mineral Survey No. 2451, Tramp No. 1 lode, identical with a portion of the westerly bdy. of Tract A.</p>
9.114	<p>Point for Cor. No. 1, Mineral Survey No. 2451, Tramp No. 1 lode, identical with the place of beginning for Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode, determined by the method of parallel end lines and record bearing; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.</p>
	<hr/> <p>Thence S. 18°28'00" E., on line 1-2, Mineral Survey No. 2451, Tramp No. 1 lode, identical with a portion of the westerly bdy. of Tract A.</p>
2.820	<p>Intersect line 2-3, Mineral Survey No. 2457, Hobo lode, and the southwesterly point of Tract A, hereinafter described in the field notes of Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 82°25'40"E., 8.404 chs. dist.</p>
	<p>Continue measurement on line 1-2, Mineral Survey No. 2451, Tramp No. 1 lode.</p>
4.610	<p>Intersect line 3-4, cancelled Mineral Survey No. 2344, Twirler lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 77°17'30" W., 0.615 chs. dist.</p>
10.325	<p>Cor. No. 2, Mineral Survey No. 2451, Tramp No. 1 lode, a point on solid bedrock, plainly mkd. with a chiseled "X" at the corner point and 2-2451 alongside. Not remonumented.</p>
	<hr/> <p>Thence S. 29°54'10" E., on line 2-3, Mineral Survey No. 2451, Tramp No. 1 lode.</p>
4.231	<p>Intersect line 6-1, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 6, hereinafter described, bears S. 13°55'50" E., 0.092 chs. dist.</p>
5.130	<p>Intersect line 5-6, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 6, hereinafter described, bears N. 31°41'10" W., 0.811 chs. dist.</p>
11.404	<p>Cor. No. 3, Mineral Survey No. 2451, Tramp No. 1 lode, on line 4-1, Mineral Survey No. 2451, Tramp Extension lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

279

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	
8.120	<p>Thence S. 64°44'00" W., on line 3-4, Mineral Survey No. 2451, Tramp No. 1 lode, identical in part with a portion of line 1-4, Mineral Survey No. 2451, Tramp Extension lode.</p> <p>Cor. No. 4, Mineral Survey No. 2451, Tramp Extension lode, hereinafter described.</p> <p>Continue measurement on line 3-4, Mineral Survey No. 2451, Tramp No. 1 lode.</p>
9.068	<p>Cor. No. 4, Mineral Survey No. 2451, Tramp No. 1 lode, monumented with the remains of a wooden post, encircled in a collar of stone, with top portion, 4x4 ins., 2 ft. long, laying alongside, dimly mkd. 4-2451.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>  <p>Deposit the top portion of the original wooden post remains, inverted, alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">Tramp Extension lode</p> <p>From Cor. No. 1, Mineral Survey No. 2451, Tramp Extension lode, monumented with the remains of a wooden post, 4x4 ins., 3¹/₂ ft. long, loosely set 4 ins. in the ground, with top portion missing, no mks. visible, encircled in a collar of stone.</p>

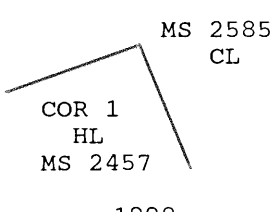
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>1998</p>
	<p>Deposit the original wooden post remains, inverted, alongside the stainless steel post.</p>
	<p>Thence S. 16°43'10" E., on line 1-2, Mineral Survey No. 2451, Tramp Extension lode.</p>
3.232	<p>Intersect line 5-6, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 5, hereinafter described, bears S. 31°41'10" E., 0.913 chs. dist.</p>
4.155	<p>Intersect line 1-2, Mineral Survey No. 2489, Wellington lode, at a point from which Cor. No. 1, hereinafter described, bears S. 63°27'00" W., 0.021 chs. dist.</p>
4.328	<p>Intersect line 4-1, Mineral Survey No. 2489, Wellington lode, at a point from which Cor. No. 1, hereinafter described, bears N. 23°40'50" W., 0.171 chs. dist.</p>
20.186	<p>Cor. No. 2, Mineral Survey No. 2451, Tramp Extension lode, monumented with the remains of a wooden post, 4x4 ins., 2 ft. long, firmly set 12 ins. in the ground, with top portion missing, no mks. visible, encircled in a collar of stone.</p>
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>1998</p> <p>Deposit the original wooden post remains, inverted, alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 64°44'00" W., on line 2-3, Mineral Survey No. 2451, Tramp Extension lode.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 9.156</p>	<p>Point for Cor. No. 3, Mineral Survey No. 2451, Tramp Extension lode, identical with the witness cor. for Cor. No. 2 and on line 1-2, Mineral Survey No. 2490, Diamond Hitch lode, hereinafter described, determined by the method of parallel end lines and side lines; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="792 499 1079 766" data-label="Diagram"> </div> <hr/> <p>Thence N. 16°43'10" W., on line 3-4, Mineral Survey No. 2451, Tramp Extension lode, identical in part with a portion of line 2-1, Mineral Survey No. 2490, Diamond Hitch lode.</p>
<p>16.628</p>	<p>The point for Cor. No. 1, Mineral Survey No. 2490, Diamond Hitch lode, hereinafter described.</p> <p>Continue measurement on line 3-4, Mineral Survey No. 2451, Tramp Extension lode.</p>
<p>20.186</p>	<p>Cor. No. 4, Mineral Survey No. 2451, Tramp Extension lode, on line 3-4, Mineral Survey No. 2451, Tramp No. 1 lode, monumented with the remains of a wooden post, 4x4 ins., 2 ft. long, firmly set 12 ins. in the ground, with top portion missing, no mks. visible, encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="766 1396 1117 1690" data-label="Diagram"> </div> <hr/> <p>Deposit the original wooden post remains, inverted, alongside the stainless steel post.</p>

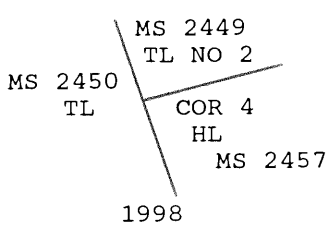
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2451,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence N. 64°44'00" E., on line 4-1, Mineral Survey No. 2451, Tramp Extension lode, identical in part with a portion of line 4-3, Mineral Survey No. 2451, Tramp No. 1 lode.
8.120	Cor. No. 3, Mineral Survey No. 2451, Tramp No. 1 lode, hereinbefore described. Continue measurement on line 4-1, Mineral Survey No. 2451, Tramp Extension lode.
8.316	Intersect line 5-6, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 5, hereinbefore described, bears S. 31°41'10" E., 4.129 chs. dist.
9.156	Cor. No. 1, Mineral Survey No. 2451, Tramp Extension lode, and the place of beginning.
<hr/> <p>DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2457, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>(Restoring the survey executed by George E. Sherer in 1905)</p> <hr/>	
<p>Hobo lode</p> <p>From Cor. No. 1, Mineral Survey No. 2457, Hobo lode, monumented with a rock in place, even with the general surface, plainly mkd. with a chiseled "X" at the corner point and 1-2457 alongside.</p> <p>At the corner point</p> <p>Set a brass tablet, 3¹/₄ ins. diam., 3¹/₂-in. stem, in drill hole of rock outcrop, encased in concrete, with top mkd.</p>	
<p>T12S R46E</p>  <p>1998</p>	
<p>Thence S. 18°28'00" E., on line 1-2, Mineral Survey No. 2457, Hobo lode.</p>	
8.238	Intersect line 1-2, Mineral Survey No. 2583, Gold Wedge lode, identical with a portion of line 1-2, Mineral Survey No. 2384, Louisville lode, at a point from which Cor. No. 2 of the Gold Wedge, hereinafter described, bears N. 16°45'40" W., 0.445 chs. dist.
8.414	Intersect line 1-2, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 1, hereinafter described, bears S. 71°51'30" W., 3.191 chs. dist.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2457,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 8.963</p>	<p>Cor. No. 2, Mineral Survey No. 2457, Hobo lode, monumented with a mound of stone, with a wooden post, 4x4 ins., 2 ft. long, plainly mkd. 2-2457, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="760 527 1052 737" style="text-align: center;"> <p>T12S R46E</p> <p>MS 2457 HL MS 2583 GWL</p> <p>COR 2</p> <p>1998</p> </div> <p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 82°25'40" W., on line 2-3, Mineral Survey No. 2457, Hobo lode.</p>
0.022	<p>Intersect line 1-2, Mineral Survey No. 2583, Gold Wedge lode, identical with a portion of line 1-2, Mineral Survey No. 2384, Louisville lode, at a point from which Cor. No. 2 of the Gold Wedge, hereinafter described, bears N. 16°45'40" W., 1.166 chs. dist.</p>
2.993	<p>Intersect line 1-2, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 1, hereinafter described, bears S. 71°51'30" W., 0.251 chs. dist.</p>
3.244	<p>Point for the southeasterly point of Tract A, described in the additional field notes of Mineral Survey No. 2457, Hobo lode, determined at the intersection of line 4-1, Mineral Survey No. 2585, Cyclops lode, identical in part with a portion of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, from which Cor. No. 1, hereinafter described, bears S. 12°38'00" E., 0.046 chs. dist. Point not monumented.</p> <p>Continue measurement on line 2-3, Mineral Survey No. 2457, Hobo lode, identical with the southerly bdy. of Tract A.</p>
8.404	<p>Point for the southwesterly point of Tract A, described in the additional field notes of Mineral Survey No. 2457, Hobo lode, determined at the intersection of line 1-2, Mineral Survey No. 2451, Tramp No. 1 lode, from which Cor. No. 1, hereinbefore described, bears N. 18°28'00" W., 2.820 chs. dist. Point not monumented.</p> <p>Continue measurement on line 2-3, Mineral Survey No. 2457, Hobo lode.</p>
9.208	<p>Intersect line 4-5, cancelled Mineral Survey No. 2344, Twirler lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 23°51'30" E., 1.889 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2457,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


<p>CHAINS 17.622</p>	<p>Point for Cor. No. 3, Mineral Survey No. 2457, Hobo lode, identical with Cor. No. 6, Mineral Survey No. 2451, Tramp No. 1 lode and on line 1-2, Mineral Survey No. 2450, Tiger lode, determined by the method of parallel side lines and record bearing; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.</p>
	<p>Thence N. 18°28'00" W., on line 3-4, Mineral Survey No. 2457, Hobo lode, identical with a portion of line 2-1, Mineral Survey No. 2450, Tiger lode.</p>
<p>7.172</p>	<p>Cor. No. 3, Mineral Survey No. 2449, Tramp No. 2 lode, hereinbefore described.</p>
	<p>Continue measurement on line 3-4, Mineral Survey No. 2457, Hobo lode, identical with a portion of 3-4, Mineral Survey No. 2449, Tramp No. 2 lode and a portion of line 2-1, Mineral Survey No. 2450, Tiger lode.</p>
<p>8.963</p>	<p>Point for Cor. No. 4, Mineral Survey No. 2457, Hobo lode, on line 3-4, Mineral Survey No. 2449, Tramp No. 2 lode and on line 1-2, Mineral Survey No. 2450, Tiger lode, determined at proportionate distance between Cors. 3 and 4, Mineral Survey No. 2449, Tramp No. 2 lode; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>
	<p>Thence N. 82°25'40" E., on line 4-1, Mineral Survey No. 2457, Hobo lode.</p>
<p>7.813</p>	<p>Intersect line 5-1, cancelled Mineral Survey No. 2344, Twirler lode, at a point from which Cor. No. 5, hereinbefore described, bears S. 12°39'30" E., 1.362 chs. dist.</p>
<p>7.832</p>	<p>Intersect line 1-2, Mineral Survey No. 2449, Tramp No. 2 lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 11°51'30" E., 1.360 chs. dist.</p>
<p>15.292</p>	<p>Intersect line 4-1, Mineral Survey No. 2585, Cyclops lode identical in part with a portion of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, at a point from which Cor. No. 1, hereinafter described, bears S. 12°38'00" E., 8.882 chs. dist. and the northeasterly point of Tract A, hereinafter described, bears S. 12°38'00" E., 3.087 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2457,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 17.622</p>	<p>Cor. No. 1, Mineral Survey No. 2457, Hobo lode, and the place of beginning.</p> <hr/>
	<p style="text-align: center;">Portion of Tract A</p> <p>Tract A is that portion of the conflict between cancelled Mineral Survey No. 2344, Twirler lode and Mineral Survey No. 2457, Hobo lode designated in the additional field notes of Mineral Survey No. 2457, Hobo lode.</p> <p>Beginning at Cor. No. 1, Mineral Survey No. 2451, Tramp No. 1 lode, hereinbefore described.</p> <p>Thence S. 64°44'00" W., on a portion of the westerly bdy. of Tract A, identical with a portion of line 1-6, Mineral Survey No. 2451, Tramp No. 1 lode.</p>
<p>1.036</p>	<p>A point on the westerly bdy. of Tract A, determined at the intersection of line 4-5, cancelled Mineral Survey No. 2344, Twirler lode, from which Cor. No. 4, hereinbefore described, bears S. 23°51'30" E., 4.447 chs. dist. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.</p> <hr/> <p>Thence N. 23°51'30" W., on the westerly bdy. of Tract A, identical with a portion of line 4-5, cancelled Mineral Survey No. 2344, Twirler lode.</p>
<p>3.408</p>	<p>Point for the northwesterly point of Tract A, determined at record deed distance on line 4-5, cancelled Mineral Survey No. 2344, Twirler lode. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.</p> <hr/>
<p>7.130</p>	<p>Thence N. 82°25'40" E., on the northerly bdy. of Tract A, parallel to the side lines of Mineral Survey No. 2457, Hobo lode.</p> <p>Point for the northeasterly point of Tract A, determined at the intersection of line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, identical in part with a portion of line 4-1, Mineral Survey No. 2585, Cyclops lode, from which Cor. No. 2, hereinbefore described, bears N. 12°38'00" W., 13.733 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

286

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2457,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;"> TL MS 2344 HL MS 2457 <hr/> TR A HL MS 2457 TL MS 2344 CL MS 2585 HL MS 2457 2000 </p>
	<p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2472, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p style="text-align: center;">(Restoring the survey executed by Arthur Philbrick in 1905)</p>
	<p style="text-align: center;">Sang De Cristo lode</p>
	<p>From Cor. No. 1, Mineral Survey No. 2472, Sang De Cristo lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 18 ins. in the ground, mkd. 1 2472 on the E. face, encircled in a collar of stone.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2650 BFL</p>  <p style="text-align: center;">2000</p>
	<p>Deposit the original wooden post, inverted, alongside the stainless steel post.</p>
	<p>Cor. is located 0.25 chs. E. of a draw, drains S. 15° E.</p>
	<p>Thence S. 56°52'30" E., on line 1-2, Mineral Survey No. 2472, Sang De Cristo lode.</p>
2.835	<p>Intersect line 5-1, Mineral Survey No. 2650, Bonanza Fraction lode, at a point from which Cor. No. 1, hereinafter described, bears S. 0°50'30" E., 3.546 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2472
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

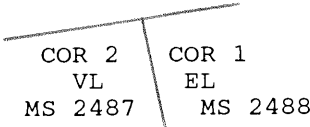
<p>CHAINS 9.179</p>	<p>The point for Cor. No. 6, Mineral Survey No. 3156, Sleeper lode, hereinafter described.</p>
<p>10.775</p>	<p>Cor. No. 2, Mineral Survey No. 2472, Sang De Cristo lode, monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, mkd. illegibly, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 0°18'10" W., on line 2-3, Mineral Survey No. 2472, Sang De Cristo lode.</p>
<p>7.299</p>	<p>Cor. No. 5, Mineral Survey No. 3156, Sleeper lode, hereinafter described.</p> <p>Continue measurement on line 2-3, Mineral Survey No. 2472, Sang de Cristo lode, identical in part with a portion of line 1-4, cancelled Mineral Survey No. 2472, Little Marie lode.</p>
<p>9.693</p>	<p>Intersect the E. and W. center line of the SE¹/₄ of sec. 9, from which the C-E-W-SE ¹/₂₅₆ sec. cor., hereinafter described, bears N. 89°47'40" E., 0.835 chs. dist.</p>
<p>22.730</p>	<p>Point for Cor. No. 3, Mineral Survey No. 2472, Sang De Cristo lode, identical with Cor. No. 2, cancelled Mineral Survey No. 2472, Midway Fraction lode and on line 4-1, cancelled Mineral Survey No. 2472, Little Marie lode, determined by the method of parallel end lines and the extension of the line through Cor. No. 5, Mineral Survey No. 3156, Sleeper lode; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> </div> <hr style="width: 20%; margin: 10px auto;"/>

288

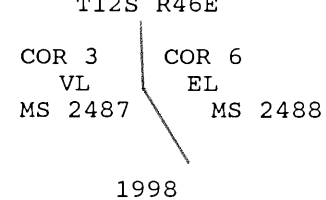
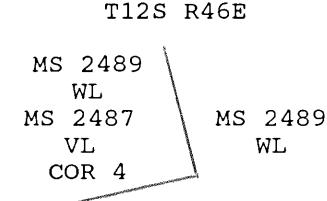
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2472
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence N. 56°52'30" W., on line 3-4, Mineral Survey No. 2472, Sang De Cristo lode.
7.565	Intersect line 2-3, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, at a point from which Cor. No. 3, hereinafter described, bears N. 12°37'40" W., 3.927 chs. dist.
10.762	<p>Cor. No. 4, Mineral Survey No. 2472, Sang De Cristo lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2487, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by R.E.L. Collier in 1905)</p> <hr/> <p style="text-align: center;">Virginia lode</p> <p>From Cor. No. 1, Mineral Survey No. 2487, Virginia lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 6 ins. in the ground, mkd. 1-2487 on the S. face, encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 8 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p> </div>

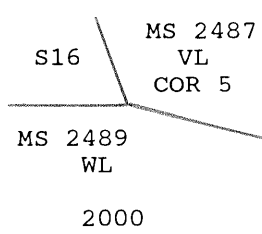
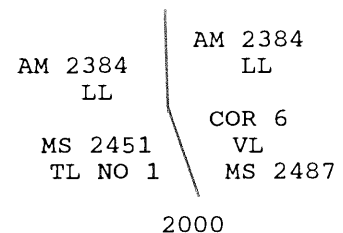
DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2487,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <p>Thence N. 76°16'00" E., on line 1-2, Mineral Survey No. 2487, Virginia lode.</p>
6.731	<p>Cor. No. 1, Mineral Survey No. 2583, Gold Wedge lode, hereinafter described, on line 1-2, Mineral Survey No. 2384, Louisville lode.</p>
9.107	<p>Cor. No. 2, Mineral Survey No. 2487, Virginia lode, identical with Cor. No. 1, cancelled Mineral Survey No. 2488, Equitable lode, monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, mkd. 1-2488 and 2487 on opposite sides, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">GWL MS 2583</p> <div style="text-align: center;">  <p style="margin-left: 100px;">COR 2 COR 1</p> <p style="margin-left: 100px;">VL EL</p> <p style="margin-left: 100px;">MS 2487 MS 2488</p> </div> <p style="text-align: center;">1998</p>
	<p>Reset the original wooden post, inverted, alongside the stainless steel post.</p>
	<p>Thence S. 13°51'30" E., on line 2-3, Mineral Survey No. 2487, Virginia lode, identical with line 1-6, cancelled Mineral Survey No. 2488, Equitable lode.</p>
0.064	<p>Intersect line 4-1, Mineral Survey No. 2583, Gold Wedge lode, at a point from which Cor. No. 1, hereinafter described, bears S. 77°50'00" W., 2.376 chs. dist.</p>
7.549	<p>Cor. No. 3, Mineral Survey No. 2487, Virginia lode, identical with Cor. No. 6, cancelled Mineral Survey No. 2488, Equitable lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 14 ins. in the ground, mkd. 3-2487 on the N. face and 6-2488 on the S. face, in a mound of stone, 4¹/₂ ft. base, 2¹/₂ ft. high.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2487,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>
	<p>Deposit the original wooden post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 31°41'10" E., on line 3-4, Mineral Survey No. 2487, Virginia lode, identical in part with line 6-5, cancelled Mineral Survey No. 2488, Equitable lode.</p>
9.102	<p>Cor. No. 5, cancelled Mineral Survey No. 2488, Equitable lode, hereinafter described.</p> <p>Continue measurement on line 3-4, Mineral Survey No. 2487, Virginia lode.</p>
9.202	<p>Intersect line 1-2, Mineral Survey No. 2489, Wellington lode, at a point from which Cor. No. 1, hereinafter described, bears S. 63°27'00" W., 8.947 chs. dist.</p>
11.226	<p>Point for Cor. No. 4, Mineral Survey No. 2487, Virginia lode, determined by the method of parallel end lines and the extension of the line through Cor. No. 5, cancelled Mineral Survey No. 2488, Equitable lode; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">2000</p>
	<p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears S. 51°24' E., 0.025 chs. dist., monumented with a rebar, ⁵/₈ in. diam., firmly set, projecting 2 ins. above the ground, with plastic cap mkd. BOUNDY RLS 2518. This point was not utilized during the course of this survey.</p> <hr/>
9.095	<p>Thence S. 76°16'00" W., on line 4-5, Mineral Survey No. 2487, Virginia lode.</p> <p>Point for Cor. No. 5, Mineral Survey No. 2487, Virginia lode, determined by the method of parallel side lines at the intersection with line 1-2, Mineral Survey No. 2489, Wellington lode; there is no remaining evidence of the original corner.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2487,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

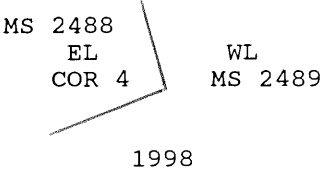
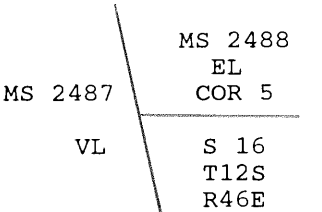
CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  <p>MS 2487 VL COR 5</p> <p>MS 2489 WL</p> <p>2000</p> </div> <p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears N. 85°00' E., 0.032 chs. dist., monumented with a rebar, ⁵/₈ in. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with plastic cap mkd. BOUNDY RLS 2518. This point was not utilized during the course of this survey.</p> <hr/> <p>Thence N. 31°41'10" W., on line 5-6, Mineral Survey No. 2487, Virginia lode.</p>
0.913	Intersect line 1-2, Mineral Survey No. 2451, Tramp Extension lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 16°43'10" W., 3.232 chs. dist.
4.129	Intersect line 4-1, Mineral Survey No. 2451, Tramp Extension lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 64°44'00" E., 0.840 chs. dist.
10.423	Intersect line 2-3, Mineral Survey No. 2451, Tramp No. 1 lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 29°54'10" W., 5.130 chs. dist.
11.234	<p>Cor. No. 6, Mineral Survey No. 2487, Virginia lode, monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, no mks. visible, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  <p>AM 2384 LL</p> <p>MS 2451 TL NO 1</p> <p>AM 2384 LL</p> <p>COR 6 VL MS 2487</p> <p>2000</p> </div> <p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2487,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS										
	Thence N. 13°55'50" W., on line 6-1, Mineral Survey No. 2487, Virginia lode.									
0.092	Intersect line 2-3, Mineral Survey No. 2451, Tramp No. 1 lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 29°54'10" W., 4.231 chs. dist.									
7.541	Cor. No. 1, Mineral Survey No. 2487, Virginia lode, and the place of beginning.									
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF CANCELLED MINERAL SURVEY NO. 2488, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>										
<p>(Restoring the survey executed by R.E.L. Collier in 1905)</p> <hr/>										
<p>cancelled Equitable lode</p>										
<p>From Cor. No. 3, cancelled Mineral Survey No. 2488, Equitable lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 20 ins. in the ground, mkd. 2488 on the E. face, encircled in a collar of stone.</p>										
<p>At the corner point</p>										
<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>										
<p>T12S R46E</p> <table style="margin: auto;"> <tr> <td style="text-align: center;">MS 2488</td> <td style="font-size: 2em; vertical-align: middle;">/</td> <td style="text-align: center;">MS 2584</td> </tr> <tr> <td style="text-align: center;">EL</td> <td></td> <td style="text-align: center;">GSL</td> </tr> <tr> <td style="text-align: center;">COR 3</td> <td></td> <td></td> </tr> </table> <p>1998</p>		MS 2488	/	MS 2584	EL		GSL	COR 3		
MS 2488	/	MS 2584								
EL		GSL								
COR 3										
<p>Reset the original wooden post, inverted, alongside the stainless steel post.</p>										
<p>Thence S. 14°23'10" E., on line 3-4, cancelled Mineral Survey No. 2488, Equitable lode.</p>										
10.336	Cor. No. 5, Mineral Survey No. 2584, Golden Sceptre lode, hereinafter described, on line 1-2, Mineral Survey No. 2489, Wellington lode.									
10.513	Cor. No. 4, cancelled Mineral Survey No. 2488, Equitable lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 20 ins. in the ground, plainly mkd. 4-2488 on the W. face.									
<p>At the corner point</p>										
<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>										

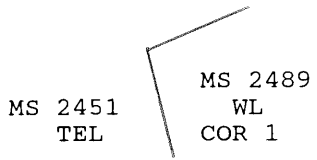
293

DEPENDENT RESURVEY OF A PORTION OF
 CANCELLED MINERAL SURVEY NO. 2488,
 T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>
	<p>Reset the original wooden post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 79°04'10" W., on line 4-5, cancelled Mineral Survey No. 2488, Equitable lode.</p>
0.643	<p>Intersect line 1-2, Mineral Survey No. 2489, Wellington lode, at a point from which Cor. No. 5, Mineral Survey No. 2584, Golden Sceptre lode, hereinafter described, bears N. 63°27'00" E., 0.656 chs. dist.</p>
1.013	<p>Cor. No. 5, cancelled Mineral Survey No. 2488, Equitable lode, on line 3-4, Mineral Survey No. 2487, Virginia lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p>
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	 <p style="text-align: center;">1998</p>
	<p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr/> <p>From Cor. No. 1, cancelled Mineral Survey No. 2488, Equitable lode, identical with Cor. No. 2, Mineral Survey No. 2487, Virginia lode, hereinbefore described.</p> <p>Thence N. 78°53'10" E., on a portion of line 1-2, cancelled Mineral Survey No. 2488, Equitable lode.</p>
3.466	<p>Cor. No. 4, Mineral Survey No. 2583, Gold Wedge lode, hereinafter described, on line 5-1, Mineral Survey No. 2584, Golden Sceptre lode.</p> <hr/>

294

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2489,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>(Restoring the survey executed by R.E.L. Collier in 1905)</p>
	<p>Wellington lode</p>
	<p>From Cor. No. 1, Mineral Survey No. 2489, Wellington lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>
	<p>Deposit the original wooden post remains alongside the stainless steel post.</p>
	<p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears S. 85°32' E., 0.021 chs. dist., monumented with a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. BOUNDY RLS 2518. This point was not utilized during the course of this survey.</p>
	<p>From this same point, a point established by person(s) unknown, bears S. 32°55' W., 0.013 chs. dist., monumented with a bolt, 3/4 in. diam., loosely set, projecting 10 ins. above the ground. This point was not utilized during the course of this survey.</p>
	<p>Thence N. 63°27'00" E., on line 1-2, Mineral Survey No. 2489, Wellington lode.</p>
0.021	Intersect line 1-2, Mineral Survey No. 2451, Tramp Extension lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 16°43'10" W., 4.155 chs. dist.
0.260	Cor. No. 5, Mineral Survey No. 2487, Virginia lode, hereinbefore described.
8.947	Intersect line 3-4, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 31°41'10" E., 2.024 chs. dist.
9.294	Intersect line 4-5, cancelled Mineral Survey No. 2488, Equitable lode, at a point from which Cor. No. 4, hereinbefore described, bears N. 79°04'10" E., 0.643 chs. dist.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2489,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 9.950</p>	<p>Cor. No. 5, Mineral Survey No. 2584, Golden Sceptre lode, hereinafter described, on line 3-4, cancelled Mineral Survey No. 2488, Equitable lode, from which Cor. No. 4, hereinafter described, bears S. 14°23'10" E., 0.177 chs. dist.</p> <p>Continue measurement on line 1-2, Mineral Survey No. 2489, Wellington lode, identical with a portion of line 5-4, Mineral Survey No. 2584, Golden Sceptre lode.</p>
<p>17.038</p>	<p>Cor. No. 2, Mineral Survey No. 2489, Wellington lode, on line 4-5, Mineral Survey No. 2584, Golden Sceptre lode, determined by person(s) unknown, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 22 ins. in the ground. This is accepted as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="836 787 1079 1029" style="text-align: center;"> <p>MS 2584 GSL</p> <p>1998</p> </div> <p>Place rebar inside the stainless steel post.</p> <p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears N. 9°18' E., 0.020 chs. dist., monumented with a rebar, $\frac{5}{8}$ in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. BOUNDY RLS 2518. This point was not utilized during the course of this survey.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 23°40'30" E., on line 2-3, Mineral Survey No. 2489, Wellington lode.</p>
<p>9.098</p>	<p>Cor. No. 3, Mineral Survey No. 2489, Wellington lode, determined by person(s) unknown, monumented with a rebar, $\frac{5}{8}$ in. diam., 18 ins. long, firmly set 15 ins. in the ground. This is accepted as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="771 1648 1047 1827" style="text-align: center;"> <p>MS 2489 WL COR 3</p> <p>1998</p> </div>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2489,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Place rebar inside the stainless steel post.</p> <p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears N. 29° 15' E., 0.017 chs. dist., monumented with a rebar, $\frac{5}{8}$ in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. BOUNDY RLS 2518. This point was not utilized during the course of this survey.</p> <hr/> <p>Thence S. 63°24'30" W., on line 3-4, Mineral Survey No. 2489, Wellington lode.</p>
17.037	<p>Cor. No. 4, Mineral Survey No. 2489, Wellington lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="841 903 1084 1039" style="text-align: center;"> </div> <p style="text-align: center;">1998</p>
8.939	<p>Deposit the original wooden post remains alongside the stainless steel post.</p> <p>Cor. is located 0.10 chs. E. of a draw, drains S. 20° E.</p> <p>From this point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears N. 65°30' E., 0.021 chs. dist., monumented with a rebar, $\frac{5}{8}$ in. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. BOUNDY RLS 2518, with a steel fence post alongside. This point was not utilized during the course of this survey.</p> <p>From this same point, a point established by person(s) unknown, bears S. 78°30' W., 0.020 chs. dist., monumented with a bolt, $\frac{3}{4}$ in. diam., firmly set, projecting 6 ins. above the ground. This point was not utilized during the course of this survey.</p> <hr/> <p>Thence N. 23°40'50" W., on line 4-1, Mineral Survey No. 2489, Wellington lode.</p> <p>Intersect line 1-2, Mineral Survey No. 2451, Tramp Extension lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 16°43'10" W., 4.328 chs. dist.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2489,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 9.110</p>	<p>Cor. No. 1, Mineral Survey No. 2489, Wellington lode, and the place of beginning.</p>
	<p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2490, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p>(Restoring the survey executed by R.E.L. Collier in 1905)</p>
	<p>Diamond Hitch lode</p>
	<p>From the point for Cor. No. 1, Mineral Survey No. 2490, Diamond Hitch lode, on line 2-3, Mineral Survey No. 2450, Sidewinder lode, determined at proportionate distance between Cors. No. 3 and 4, Mineral Survey No. 2451, Tramp Extension lode; there is no remaining evidence of the original corner. Not monumented.</p>
	<p>From this point, Cor. No. 4, Mineral Survey No. 2451, Tramp Extension lode, hereinbefore described, bears N. 16°43'10" W., 3.558 chs. dist.</p>
	<p>Thence S. 16°43'10" E., on line 1-2, Mineral Survey No. 2490, Diamond Hitch lode, identical in part with a portion of line 4-3, Mineral Survey No. 2451, Tramp Extension lode.</p>
<p>16.628</p>	<p>The witness cor. for Cor. No. 2, Mineral Survey No. 2490, Diamond Hitch lode, identical with Cor. No. 3, Mineral Survey No. 2451, Tramp Extension lode, hereinbefore described.</p>
	<p>Continue measurement on line 1-2, Mineral Survey No. 2490, Diamond Hitch lode.</p>
<p>20.731</p>	<p>True point for Cor. No. 2, Mineral Survey No. 2490, determined on the projection of line 4-3, Mineral Survey No. 2451, Tramp Extension lode, at record distance.</p>
	<p>Set PK nail flush with the surface of an asphalt road.</p> <p>Cor. is located 10 lks. S. of an asphalt road, 30 lks. wide, bears N. 77° E. and S. 77° W.</p>
	<p>Thence S. 67°59'30" W., on line 2-3, Mineral Survey No. 2490, Diamond Hitch lode.</p>
<p>1.614</p>	<p>Point for the witness cor. to Cor. No. 2, Mineral Survey No. 2490, Diamond Hitch lode, determined at record distance on line 2-3, Mineral Survey No. 2490; there is no remaining evidence of the original witness cor.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., flush with the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>

298

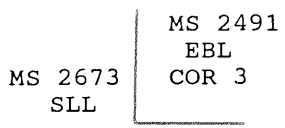
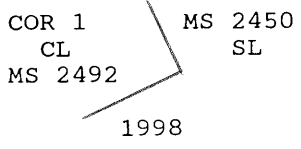
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2490,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
9.162	<div data-bbox="787 268 1071 472" data-label="Diagram"> </div> <p data-bbox="443 504 1474 556">From this point, the NW. cor. of the remains of an adobe house bears S. 81°26' E., 0.606 chs. dist. (Record: S. 82°52' E.)</p> <p data-bbox="443 583 1474 714">Cor. No. 3, Mineral Survey No. 2490, Diamond Hitch lode, determined by person(s) unknown, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 20 ins. in the ground, in a mound of stone, 2½ ft. base, 1½ ft. high. This is accepted as the best available evidence of the original corner position.</p> <p data-bbox="443 741 747 766">At the corner point</p> <p data-bbox="443 793 1474 846">Set a stainless steel post, 28 ins. long, 2½ ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="876 871 1071 1060" data-label="Diagram"> </div> <p data-bbox="443 1087 1144 1113">Place rebar inside the stainless steel post.</p> <p data-bbox="443 1140 1474 1192">Cor. is located 1.60 chs. S. of an improved gravel road, 45 lks. wide, bears N. 77° E. and S. 77° W.</p> <hr data-bbox="673 1207 1242 1213"/> <p data-bbox="443 1245 1474 1297">Thence N. 12°00'20" W., on a portion of line 3-4, Mineral Survey No. 2490, Diamond Hitch lode.</p>
2.603	<p data-bbox="443 1329 1425 1381">Cor. No. 2, Mineral Survey No. 2493, Le Roi lode, hereinafter described.</p> <hr data-bbox="443 1396 1474 1402"/>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2491,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">(Restoring the survey executed by R.E.L. Collier in 1905)</p> <hr/> <p style="text-align: center;">Early Bird lode</p> <p>From Cor. No. 2, Mineral Survey No. 2491, Early Bird, identical with Cor. No. 1, Mineral Survey No. 2494, Ugly Duckling lode, on line 3-4, Mineral survey No. 2492, Comet lode, perpetuated by person(s) unknown, monumented with an 80d nail set in the center of a mound of stone. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, in a collar of stone, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p> </div> <p>Deposit 80d nail inside stainless steel post.</p> <p>Thence N. 80°45'00" W., on line 2-3, Mineral Survey No. 2491, Early Bird, identical in part with line 1-4, Mineral Survey No. 2494, Ugly Duckling lode.</p> <p>7.356 Cor. No. 4, Mineral Survey No. 2494, Ugly Duckling lode, on line 1-2, Mineral Survey No. 2673, Salt Lake lode, perpetuated by person(s) unknown, monumented with an 80d nail set in the center of a mound of stone. This is accepted as a careful and faithful perpetuation of the position of the original corner. Not remonumented.</p> <p>Continue measurement on line 2-3, Mineral Survey No. 2491, Early Bird lode.</p> <p>8.772 Cor. No. 3, Mineral Survey No. 2491, Early Bird lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2491,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">2000</p>
	<p>Thence N. 3°39'00" E., on line 3-4, Mineral Survey No. 2492, Early Bird lode.</p>
3.849	Intersect line 6-1, Mineral Survey No. 2673, Salt Lake lode, at a point from which Cor. No. 1, hereinafter described, bears S. 72°58'00" E., 0.946 chs. dist.
9.20	Power line, bears S. 53° E. and N. 53° W.
9.30	Wire fence, bears S. 53° E. and N. 53° W., enter reclaim area of mine.
16.958	Point for Cor. No. 4, Mineral Survey No. 2491, Early Bird lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2492, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>(Restoring the survey executed by R.E.L. Collier in 1905)</p> <hr/>	
	<p style="text-align: center;">Comet lode</p> <p>From Cor. No. 1, Mineral Survey No. 2492, Comet lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2492,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Cor. is located 0.55 chs. E. of mining reclaim area, bears NW. and SE.</p> <p>Thence S. 3°36'50" W., on line 1-2, Mineral Survey No. 2492, Comet lode.</p>
15.728	<p>Intersect line 3-4, Mineral Survey No. 2493, Le Roi lode, at a point from which Cor. No. 4, hereinafter described, bears N. 11°33'50" W., 7.621 chs. dist.</p>
22.732	<p>Cor. No. 2, Mineral Survey No. 2492, Comet lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. illegible, laying alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="803 819 1031 1029" style="text-align: center;"> <p>MS 2492 CL COR 2</p> <p>S16</p> <p>T12S R46E</p> <p>1998</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.</p>
8.670	<p>Thence N. 86°23'40" W., on line 2-3, Mineral Survey No. 2492, Comet lode.</p> <p>Cor. No. 3, Mineral Survey No. 2492, Comet lode, on line 1-2, Mineral Survey No. 2494, Ugly Duckling lode, monumented with a mound of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 249 and the rest illegible, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="828 1533 1136 1795" style="text-align: center;"> <p>MS 2492 CL COR 3</p> <p>MS 2494 UDL</p> <p>S16 T12S R46E</p> <p>1998</p> </div>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2492,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2493,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


(Restoring the survey executed by
R.E.L. Collier in 1905)

Le Roi lode

From Cor. No. 2, Mineral Survey No. 2493, Le Roi lode, on line 3-4, Mineral Survey No. 2490, Diamond Hitch lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.

At the corner point in the center of the mound of stone

Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.



1998


Thence S. 88°11'30" W., on line 2-3, Mineral Survey No. 2493, Le Roi lode.

5.832

Cor. No. 3, Mineral Survey No. 2493, Le Roi lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.

At the corner point

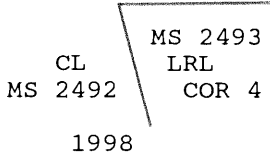
Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.




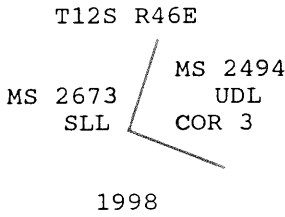
T12S R46E

1998

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2493,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr/>
	<p>Thence N. 11°33'50" W., on line 3-4, Mineral Survey No. 2493, Le Roi lode.</p>
15.061	<p>Intersect line 1-2, Mineral Survey No. 2492, Comet lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 3°36'50" W., 7.004 chs. dist.</p>
22.682	<p>Cor. No. 4, Mineral Survey No. 2493, Le Roi lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>Cor. is located 0.30 chs. S. of a mining reclaim area, bears E. and W.</p> <hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2494, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>(Restoring the survey executed by R.E.L. Collier in 1905)</p> <hr/> <p>Ugly Duckling lode</p> <p>From Cor. No. 3, Mineral Survey No. 2492, Comet Lode, hereinbefore described, on line 1-2, Mineral Survey No. 2494, Ugly Duckling lode.</p> <p>From this point, Cor. No. 1, Mineral Survey No. 2494, Ugly Duckling lode, identical with Cor. No. 2, Mineral Survey No. 2491, Early Bird lode, bears N. 3°37'30" E., 11.357 chs. dist., monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position. Not remonumented.</p> <p>Thence S. 3°37'30" W., on a portion of line 1-2, Mineral Survey No. 2494, Ugly Duckling lode.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2494,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 1.388</p>	<p>Cor. No. 2, Mineral Survey No. 2494, Ugly Duckling lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>MS 2494 UDL COR 2 S16</p> <p>T12S R46E</p> <p>1998</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr/> <p>Thence N. 80°48'00" W., on line 2-3, Mineral Survey No. 2494, Ugly Duckling lode.</p>
<p>4.729</p>	<p>Intersect line 2-3, Mineral Survey No. 2673, Salt Lake lode, at a point from which Cor. No. 3, hereinafter described, bears S. 10°39'40" E., 4.906 chs. dist.</p>
<p>7.361</p>	<p>Cor. No. 3, Mineral Survey No. 2494, Ugly Duckling lode, monumented with the decayed remains of a wooden post, 4x4 ins., 2 ft. long, encircled in a collar of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 25 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  <p>T12S R46E</p> <p>MS 2673 MS 2494 SLL UDL COR 3</p> <p>1998</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post.</p> <hr/>

305

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2530,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

(Restoring the survey executed by
George E. Sherer in 1906)


Denver No. 2 lode

From Cor. No. 4, Mineral Survey No. 2530, Denver No. 2 lode, identical with Cor. No. 1, cancelled Mineral Survey No. 2587, Key Stone lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 2530 and the rest illegible, laying alongside.

At the corner point

Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

T12S R46E



1999

Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.

Thence N. 80°04'50" W., on line 4-5, Mineral Survey No. 2530, Denver No. 2 lode.

7.861 Intersect the line bet. secs. 16 and 17, at a point from which the cor. of secs. 8, 9, 16 and 17, hereinbefore described, bears N. 0°42'50" W., 10.046 chs. dist.

9.172 Cor. No. 5, Mineral Survey No. 2530, Denver No. 2 lode, a point on solid bedrock, 3x2 ft., plainly mkd. with a chiseled "X" at the corner point, with a collar of stone, 2¹/₂ ft. base, 1¹/₂ ft. high, N. of the cor., no other markings being found. Chiseled 5-2530 on bedrock alongside the "X".

Venture Lode

From Cor. No. 1, Mineral Survey No. 2530, Venture lode, a point on solid bedrock, 10x8 ft., projecting 6 ft. above the general surface, plainly mkd. with a chiseled "X" at the corner point and 1-2530 on the SE. face. Not remonumented.

Thence N. 87°14'10" E., on line 1-2, Mineral Survey No. 2530, Venture lode.

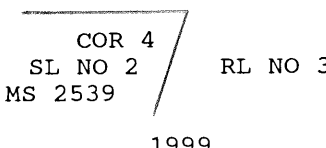
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2530,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
4.183	Intersect the line bet. secs. 8 and 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, hereinbefore described, bears N. $0^{\circ}06'40''$ W., 16.651 chs. dist.
6.616	<p>Cor. No. 2, Mineral Survey No. 2530, Venture lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 22 ins. in the ground, no mks. visible, in a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="836 661 1047 850" style="text-align: center;"> <p>T12S R46E</p> <p>1998</p> </div> <p>Deposit the original wooden post, inverted, in collar of stone.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2539, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by Donald Cameron in 1906)</p> <hr/> <p style="text-align: center;">Sunset No. 1 lode</p> <p>From the point for Cor. No. 1, Mineral Survey No. 2539, Sunset No. 1 lode, identical with Cor. 1, Mineral Survey No. 2539, Sunset No. 2 lode, determined at record bearing and distance from Cor. No. 4, Mineral Survey No. 2539, Sunset No. 2 lode, hereinafter described; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.</p> <p>Thence S. $77^{\circ}23'00''$ W., on line 1-2, Mineral Survey No. 2539, Sunset No. 1 lode, identical with line 1-2, Mineral Survey No. 2539, Sunset No. 2 lode.</p>
3.369	Intersect line 1-2, Mineral Survey No. 5086, Ladd #3 lode, at a point from which Cor. No. 1, hereinafter described, bears North, 8.567 chs. dist.
9.130	Point for Cor. No. 2, Mineral Survey No. 2539, Sunset No. 1 lode, identical with Cor. No. 2, Mineral Survey No. 2539, Sunset No. 2 lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2539,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence S. 8°14'30" E., on line 2-3, Mineral Survey No. 2539, Sunset No. 1 lode.
8.330	Intersect the line bet. secs. 10 and 15, at a point from which the true point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, hereinbefore described, bears S. 89°53'30" W., 7.431 chs. dist.
21.203	Point for Cor. No. 3, Mineral Survey No. 2539, Sunset No. 1 lode, on line 4-1, Mineral Survey No. 2784, Rand lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.
	<hr/> Thence N. 77°23'00" E., on line 3-4, Mineral Survey No. 2539, Sunset No. 1 lode, identical with a portion of line 4-1, Mineral Survey No. 2784, Rand lode.
8.775	Point for Cor. No. 4, Mineral Survey No. 2539, Sunset No. 1 lode, identical with Cor. No. 1, Mineral Survey No. 2784, Rand lode, Cor. No. 1, Mineral Survey No. 2784, Rand No. 1 lode and Cor. No. 1, Mineral Survey No. 2784, Rand No. 2 lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.
	<hr/> Thence N. 7°17'00" W., on line 4-1, Mineral Survey No. 2539, Sunset No. 1 lode.
10.930	Intersect the line bet. secs. 10 and 15, at a point from which the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, hereinbefore described, bears S. 89°53'30" W., 6.453 chs. dist.
21.233	The point for Cor. No. 1, Mineral Survey No. 2539, Sunset No. 1 lode, identical with Cor. No. 1, Mineral Survey No. 2539, Sunset No. 2 lode, and the place of beginning.
	<hr/> <p style="text-align: center;">Sunset No. 2 lode</p> From the point for Cor. No. 2, Mineral Survey No. 2539, Sunset No. 2 lode, identical with Cor. No. 2, Mineral Survey No. 2539, Sunset No. 1 lode, hereinbefore described. Thence N. 13°51'00" E., on line 2-3, Mineral Survey No. 2539, Sunset No. 2 lode.
10.120	Intersect line 4-1, Mineral Survey No. 5086, Ladd #3 lode, at a point from which Cor. No. 1, hereinafter described, bears East, 3.200 chs. dist.
17.789	Point for Cor. No. 3, Mineral Survey No. 2539, Sunset No. 2 lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 2539,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence N. 77°23'00" E., on line 3-4, Mineral Survey No. 2539, Sunset No. 2 lode.
9.112	Intersect line 3-4, Mineral Survey No. 2784, Rand No. 3 lode, at a point from which Cor. No. 4, hereinafter described, bears N. 9°27'00" E., 6.093 chs. dist.
10.538	Cor. No. 4, Mineral Survey No. 2539, Sunset No. 2 lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 10 ins. in the ground, dimly mkd. 4-2539, in a mound of stone, 4 ft. base, 1½ ft. high.
	At the corner point Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2784</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1999</p>
	Deposit the original wooden post, inverted, in collar of stone.
	Thence S. 17°46'00" W., on line 4-1, Mineral Survey No. 2539, Sunset No. 2 lode.
9.143	Intersect line 3-4, Mineral Survey No. 2784, Rand No. 3 lode, at a point from which Cor. No. 3, identical with Cor. No. 2, Mineral Survey No. 2784, Rand No. 2 lode, hereinafter described, bears S. 9°27'00" W., 7.566 chs. dist.
18.460	The point for Cor. No. 1, Mineral Survey No. 2539, Sunset No. 2 lode, identical with Cor. No. 1, Mineral Survey No. 2539, Sunset No. 1 lode, hereinbefore described.
	<p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2576, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p style="text-align: center;">(Restoring the survey executed by William B. Milliken in 1906)</p>
	<p style="text-align: center;">Eva Bell lode</p>
	From Cor. No. 4, Mineral Survey No. 2576, Eva Bell lode, monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, no mks. visible, laying alongside.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2576,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS							
	<p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">MS 2576</td> <td rowspan="3" style="padding: 2px;">MS 2635</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">EBL</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">COR 4</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px;">GEL</td> </tr> </table> <p style="text-align: center;">2000</p>	MS 2576	MS 2635	EBL	COR 4	GEL	
MS 2576	MS 2635						
EBL							
COR 4							
GEL							
	<p>Deposit the original wooden post alongside the stainless steel post.</p>						
	<p>Thence N. 0°55'20" E., on line 4-1, Mineral Survey No. 2576, Eva Bell lode.</p>						
7.339	<p>Intersect line 6-1, Mineral Survey No. 2635, Great Eastern lode, at a point from which Cor. No. 1, hereinafter described, bears N. 65°17'50" E., 2.855 chs. dist.</p>						
14.973	<p>Intersect the line bet. secs. 4 and 9, at a point from which the cor. of secs. 4, 5, 8 and 9, hereinbefore described, bears S. 88°33'30" W., 14.406 chs. dist.</p>						
21.937	<p>Intersect line 2-3, Snowy Range lode (unsurveyed), at a point from which Cor. No. 3, hereinafter described, bears S. 28°39'50" W., 5.518 chs. dist.</p>						
22.746	<p>Cor. No. 1, Mineral Survey No. 2576, Eva Bell lode, monumented with a wooden post, 4x4 ins., 4 ft. long, loosely set 4 ins. in the ground, no mks. visible, in a mound of stone.</p>						
	<p>At the corner point</p>						
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>						
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">S4</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">COR 1</td> <td rowspan="3" style="padding: 2px;">MS 2576</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">EBL</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">MS 2576</td> </tr> </table> <p style="text-align: center;">2000</p>	COR 1	MS 2576	EBL	MS 2576		
COR 1	MS 2576						
EBL							
MS 2576							
	<p>Deposit the original wooden post, inverted, alongside the stainless steel post.</p> <hr style="width: 100%;"/>						

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2576,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">Snowy Range lode (unsurveyed)</p> <p>The location of the Snowy Range lode (unsurveyed) is based on the 1906 survey executed by W.B. Milliken as shown on the official amended plat of Mineral Survey No. 2576, approved November 27, 1907.</p> <p>From Cor. No. 2, Snowy Range lode (unsurveyed), monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 8 ins. in the ground, no mks. visible, in a mound of stone.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>Deposit the original wooden post, inverted, alongside the stainless steel post.</p> <p>Cor. is located 0.90 chs. W. of a draw, drains N. 30° E.</p> <p>From this point, Cor. No. 1, Mineral Survey No. 2576, Eva Bell lode, hereinbefore described, bears S. 33°29'50" W., 4.469 chs. dist. (Record: S. 33°25' W., 295.6 ft. (4.479 chs.))</p> <p>Thence S. 28°39'50" W., on line 2-3, Snowy Range lode (unsurveyed).</p> <p>5.169 Intersect line 4-1, Mineral Survey No. 2576, Eva Bell lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 0°55'20" E., 0.809 chs. dist.</p> <p>10.687 Cor. No. 3, Snowy Range lode (unsurveyed), monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, no mks. visible, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a copper-coated steel stake, 24 ins. long, 1/2 in. diam., 18 ins. in the ground, in a collar of stone, with top mkd.</p> <div style="text-align: center;">  </div> <p>Deposit the original wooden post in the collar of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 4°29'10" W., on line 3-4, Snowy Range lode (unsurveyed).</p>
--------	--

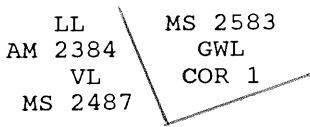
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2576,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
2.195	Intersect the line bet. secs. 4 and 9, at a point from which the cor. of secs. 4, 5, 8 and 9 bears S. 88°33'30" W., 11.699 chs. dist.
10.111	<p>Cor. No. 4, Snowy Range lode (unsurveyed), monumented with a mound of stone, with a wooden post, 4x4 ins., 4 ft. long, no mks. visible, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a copper-coated steel stake, 24 ins. long, 1/2 in. diam., 14 ins. in the ground, in a collar of stone, with top mkd.</p> <div data-bbox="906 604 1015 735" style="text-align: center;"> <p>COR 4 SRL 2000</p> </div> <p>Deposit the original wooden post in the collar of stone.</p> <p>From this point, Cor. No. 3, Eva Bell lode, on line 4-1, Mineral Survey No. 2576, Water Loo lode, bears S. 27°26'10" W., 7.784 chs. dist., monumented with a wooden post, 4x4 ins., 4 ft. long, loosely set 4 ins. in the ground, no mks. visible, in a mound of stone. (Record: S. 27°24' W., 513.44 ft. (7.779 chs.))</p> <p>At the corner point</p> <p>Set a copper-coated steel stake, 24 ins. long, 1/2 in. diam., 4 ins. in the ground, in a collar of stone, with top mkd.</p> <div data-bbox="954 1102 1079 1291" style="text-align: center;"> <p>MS 2576 EBL COR 3 2000</p> </div> <p>Deposit the original wooden post in the collar of stone.</p>
1.302	<p>Intersect line 6-1, Mineral Survey No. 2635, Great Eastern lode, at a point from which Cor. No. 6, hereinafter described, bears S. 65°17'50" W., 4.258 chs. dist.</p> <hr/> <p style="text-align: center;">Water Loo lode</p> <p>From Cor. No. 3, Mineral Survey No. 2576, Water Loo lode, identical with Cor. No. 2, cancelled Mineral Survey No. 2628, A.T. lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. illegibly, laying alongside.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2576,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS							
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">MS 2339</td> <td style="padding: 2px;">MS 2576</td> </tr> <tr> <td style="padding: 2px;">SML</td> <td style="padding: 2px;">WLL</td> </tr> <tr> <td></td> <td style="padding: 2px;">COR 3</td> </tr> </table> <p style="text-align: center;">MS 2775 RL</p> <p style="text-align: center;">2000</p> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.</p> <p>Cor. is located 0.20 chs. N. of a draw, drains S. 80° W.</p> <p>Thence S. 89°05'30" E., on line 3-4, Mineral Survey No. 2576, Water Loo lode.</p>	MS 2339	MS 2576	SML	WLL		COR 3
MS 2339	MS 2576						
SML	WLL						
	COR 3						
1.675	Intersect the line bet. secs. 8 and 9, at a point from which the cor. of secs. 4, 5, 8 and 9 bears N. 0°07'20" W., 16.567 chs. dist.						
3.024	Intersect line 1-2, Mineral Survey No. 2339, Stella M. lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 27°04'20" E., 3.344 chs. dist.						
9.098	<p>Cor. No. 4, Mineral Survey No. 2576, Water Loo lode, identical with Cor. No. 1, cancelled Mineral Survey No. 2628, A.T. lode, monumented with a rhyolite stone, 16x14 ins., firmly set, projecting 18 ins. above the ground, plainly mkd. with a chiseled "X" and 1-2628 on top and 4-2576 on the E. face. Not remonumented.</p> <p>Cor. is located on ridge, bears N. and S.</p>						
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2583, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>							
<p>(Restoring the survey executed by William B. Milliken in 1906)</p> <hr/>							
<p>Gold Wedge lode</p> <p>From Cor. No. 4, Mineral Survey No. 2583, Gold Wedge lode, on line 1-2, cancelled Mineral Survey No. 2488, Equitable lode and on line 5-1, Mineral Survey No. 2584, Golden Sceptre lode, monumented with a granite stone, 16x10 ins., firmly set, projecting 12 ins. above the ground, plainly mkd. 4 2583 on top.</p> <p>Thence S. 77°50'00" W., on line 4-1, Mineral Survey No. 2583, Gold Wedge lode.</p>							

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2583,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
3.465	Intersect line 6-1, Mineral Survey No. 2488, cancelled Equitable lode, identical with line 2-3, Mineral Survey No. 2487, Virginia lode, at a point from which Cor. No. 1 and Cor. No. 2 respectively, hereinbefore described, bears N. 13°51'30" W., 0.064 chs. dist.
5.841	<p>Cor. No. 1, Mineral Survey No. 2583, Gold Wedge lode, on line 1-2, Mineral Survey No. 2384, Louisville lode and on line 1-2, Mineral Survey No. 2487, Virginia lode, monumented with a basalt stone, 18x14x14 ins., firmly set 10 ins. in the ground, plainly mkd. 1 2583 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>1998</p> <p>Deposit the original cornerstone alongside the stainless steel post.</p> <p>From this point, U.S. Location Monument No. 177, monumented with a rhyolite stone, 16x10 ins., firmly set in a collar of stone, 6 ft. base, 2¹/₂ ft. high, plainly mkd. USLM 177 on the S. face, bears S. 67°56'00" W., 8.319 chs. dist. (Record: S. 68°02' W., 547.64 ft. (8.298 chs.))</p> <hr/> <p>Thence N. 16°45'40" W., on line 1-2, Mineral Survey No, 2583, Gold Wedge lode, identical with a portion of line 2-1, Mineral Survey No. 2384, Louisville lode.</p>
3.195	Intersect line 2-3, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 82°25'40" E., 0.022 chs. dist.
3.740	Intersect line 1-2, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 1, hereinafter described, bears S. 71°51'30" W., 3.186 chs. dist.
3.916	Intersect line 1-2, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 18°28'00" E., 0.725 chs. dist.
4.361	<p>Cor. No. 2, Mineral Survey No. 2583, Gold Wedge lode, on line 1-2, Mineral Survey No. 2384, Louisville lode, monumented with a basalt stone, 24x20x12 ins., firmly set 8 ins. in the ground, plainly mkd. with a chiseled "X" on top and 2 2583 on the E. face.</p> <p>At the corner point</p>


314

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2583,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

T12S R46E



Deposit the original cornerstone alongside the stainless steel post.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2584,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


(Restoring the survey executed by
William B. Milliken in 1906)

Golden Sceptre lode

From Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre lode, identical with Cor. No. 3, Mineral Survey No. 2583, Gold Wedge lode, Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode and Cor. No. 2, Mineral Survey No. 2585, Cyclops lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.

At the corner point

Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 23 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.



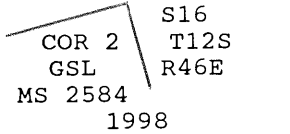
Deposit the original wooden post remains alongside the stainless steel post.

Thence N. 63°26'20" E., on line 1-2, Mineral Survey No. 2584, Golden Sceptre lode, identical with a portion of line 1-2, Mineral Survey No. 2584, Golden Sceptre No. 2 lode.

9.090

Point selected for the witness cor. to Cor. No. 2, Mineral Survey No. 2584, Golden Sceptre lode.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2584,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

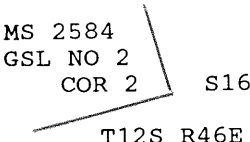
CHAINS										
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC MS 2584 GSL NO 2 →</p>  <p>COR 2 S16 GSL T12S MS 2584 R46E 1998</p> </div> <p>Cor. is located 0.20 chs. W. of a draw, drains S. 25° E.</p>									
9.290	<p>Point for Cor. No. 2, Mineral Survey No. 2584, Golden Sceptre lode, on line 1-2, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, determined at proportionate distance between Cors. 1 and 2, Mineral Survey No. 2584, Golden Sceptre No. 2 lode; there is no remaining evidence of the original corner. Point falls in a draw where it is impractical to establish a permanent monument.</p> <hr/> <p>Thence S. 14°29'20" E., on line 2-3, Mineral Survey No. 2584, Golden Sceptre lode.</p>									
4.257	<p>Point for Cor. No. 3, Mineral Survey No. 2584, Golden Sceptre lode, identical with Cor. Nos. 4 and 6, cancelled Mineral Survey 2472, Midway Fraction and Midway lodes, respectively, determined by the method of grant boundary adjustment; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>MS 2584</td> <td> </td> <td>T12S</td> </tr> <tr> <td>GSL</td> <td> </td> <td>R46E</td> </tr> <tr> <td>COR 3</td> <td> </td> <td>S16</td> </tr> </table> <p>1998</p> </div> <hr/> <p>Thence S. 15°11'20" E., on line 3-4, Mineral Survey No. 2584, Golden Sceptre lode.</p>	MS 2584		T12S	GSL		R46E	COR 3		S16
MS 2584		T12S								
GSL		R46E								
COR 3		S16								
16.024	<p>Point for Cor. No. 4, Mineral Survey No. 2584, Golden Sceptre lode, determined at record distance on the extension of the line from Cor. No. 5, Mineral Survey No. 2584, Golden Sceptre lode, hereinafter described, to Cor. No. 2, Mineral Survey No. 2489, Wellington lode, hereinbefore described; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., flush with the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>									

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2584,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

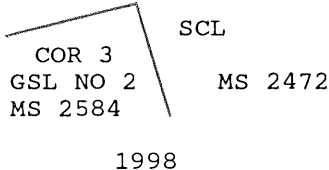
CHAINS																									
	<div style="text-align: center;"> <table border="0"> <tr> <td>MS 2584</td> <td>T12S</td> </tr> <tr> <td>GSL</td> <td>R46E</td> </tr> <tr> <td>COR 4</td> <td>S16</td> </tr> </table> <p>1998</p> </div> <p>Cor. is located 0.35 chs. W. of asphalt road, 30 lks. wide, bears N. and S.</p> <hr/> <p>Thence S. 63°27'00" W., on line 4-5, Mineral Survey No. 2584, Golden Sceptre lode.</p>	MS 2584	T12S	GSL	R46E	COR 4	S16																		
MS 2584	T12S																								
GSL	R46E																								
COR 4	S16																								
2.197	<p>Cor. No. 2, Mineral Survey No. 2489, Wellington lode, hereinbefore described.</p> <p>Continue measurement on line 4-5, Mineral Survey No. 2584, Golden Sceptre lode, identical with a portion of line 2-1, Mineral Survey No. 2489, Wellington lode.</p>																								
9.285	<p>Cor. No. 5, Mineral Survey No. 2584, Golden Sceptre lode, on line 3-4, cancelled Mineral Survey No. 2488, Equitable lode, determined by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 21 ins. in the ground, encircled in a collar of stone. This is accepted as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td></td> <td></td> <td>MS 2584</td> <td></td> </tr> <tr> <td>MS 2488</td> <td></td> <td>GSL</td> <td></td> </tr> <tr> <td>EL</td> <td></td> <td>COR 5</td> <td></td> </tr> <tr> <td colspan="2">-----</td> <td></td> <td></td> </tr> <tr> <td>MS 2488 EL</td> <td></td> <td>MS 2489</td> <td></td> </tr> <tr> <td>MS 2489 WL</td> <td></td> <td>WL</td> <td></td> </tr> </table> <p>1998</p> </div> <p>Place rebar inside the stainless steel post.</p> <p>From this point, Cor. No. 4, cancelled Mineral Survey No. 2488, Equitable lode, hereinbefore described, bears S. 14°23'10" E., 0.177 chs. dist.</p> <p>From this same point, a point established by Wallace T. Boundy, Nevada Professional Land Surveyor No. 2518, bears N. 85°49' E., 0.029 chs. dist., monumented with a rebar, $\frac{5}{8}$ in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. BOUNDY RLS 2518, with steel fence alongside. This point was not utilized during the course of this survey.</p> <hr/> <p>Thence N. 15°03'10" W., on a portion of line 5-1, Mineral Survey No. 2584, Golden Sceptre lode.</p>			MS 2584		MS 2488		GSL		EL		COR 5		-----				MS 2488 EL		MS 2489		MS 2489 WL		WL	
		MS 2584																							
MS 2488		GSL																							
EL		COR 5																							

MS 2488 EL		MS 2489																							
MS 2489 WL		WL																							

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2584,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

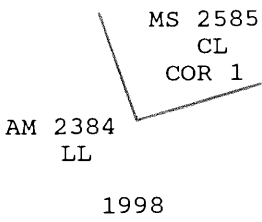
<p>CHAINS 15.929</p>	<p>Cor. No. 4, Mineral Survey No. 2583, Gold Wedge lode, hereinbefore described, on line 1-2, cancelled Mineral Survey No. 2488, Equitable lode.</p>
	<p style="text-align: center;">Golden Sceptre No. 2 lode</p>
	<p>From Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2583, Gold Wedge lode, Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre lode and Cor. No. 2, Mineral Survey No. 2585, Cyclops lode, hereinbefore described.</p>
	<p>Thence N. 63°26'20" E., on line 1-2, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical in part with line 1-2, Mineral Survey No. 2584, Golden Sceptre lode.</p>
<p>9.090</p>	<p>The witness cor. to Cor. No. 2, Mineral Survey No. 2584, Golden Sceptre lode, hereinbefore described.</p>
<p>9.290</p>	<p>The true point for Cor. No. 2, Mineral Survey No. 2584, Golden Sceptre lode, hereinbefore described.</p>
<p>9.380</p>	<p>Point for Cor. No. 2, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, determined by the method of parallel end lines and side lines; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>MS 2584 GSL NO 2 COR 2 S16 T12S R46E</p> </div>
	<p style="text-align: center;">1998</p>
	<p>Cor. is located 0.10 chs. E. of a draw, drains S. 25° E.</p>
	<p>Thence N. 12°37'40" W., on line 2-3, Mineral Survey No. 2584, Golden Sceptre No. 2 lode.</p>
<p>6.677</p>	<p>Intersect the line bet. secs. 9 and 16, at a point from which the E ¹/₁₆ sec. cor. of secs. 9 and 16, hereinbefore described, bears S. 89°52'50" E., 9.799 chs. dist.</p>
<p>17.896</p>	<p>Intersect line 3-4, Mineral Survey No. 2472, Sang De Cristo lode, at a point from which Cor. No. 4, hereinbefore described, bears N. 56°52'30" W., 3.197 chs. dist.</p>
<p>21.823</p>	<p>Cor. No. 3, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, monumented with a rhyolite stone, 16x10x12 ins., loosely set 4 ins. in the ground, mkd. 3-2584 on the W. face.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2584,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


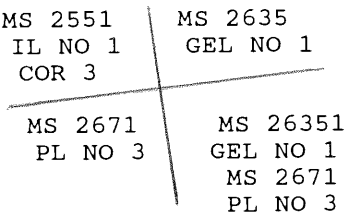
CHAINS	
	<p style="text-align: center;">T12SR46E</p>  <p style="text-align: center;">1998</p>
	<p>Deposit the original cornerstone alongside the stainless steel post.</p> <hr/>
	<p>Thence S. 63°26'20" W., on line 3-4, Mineral Survey No. 2584, Golden Sceptre No. 2 lode.</p>
7.698	<p>Intersect the N. and S. center line of sec. 9, at a point from which the C-S $\frac{1}{16}$ sec. cor., hereinafter described, bears N. 0°06'40" W., 8.464 chs. dist.</p>
9.380	<p>Cor. No. 4, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2585, Cyclops lode, monumented with a basalt stone, 16x12 ins., firmly set, projecting 12 ins. above the ground, plainly mkd. with a chiseled "X" on top and 4-2584 on the E. face. Not remonumented.</p> <hr/>
	<p>Thence S. 12°37'40" E., on line 4-1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with line 3-2, Mineral Survey No. 2585, Cyclops lode.</p>
6.946	<p>Intersect the N. and S. center line of sec. 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, hereinbefore described, bears S. 0°06'40" E., 3.786 chs. dist.</p>
10.828	<p>Intersect the line bet. secs. 9 and 16, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, hereinbefore described, bears N. 89°52'50" W., 0.841 chs. dist.</p>
21.823	<p>Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2583, Gold Wedge lode, Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre lode and Cor. No. 2, Mineral Survey No. 2585, Cyclops lode, and the place of beginning.</p> <hr/>
	<p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2585, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>
	<p style="text-align: center;">(Restoring the survey executed by William B. Milliken in 1906)</p> <hr/>
	<p style="text-align: center;">Cyclops lode</p>
	<p>From Cor. No. 1, Mineral Survey No. 2585, Cyclops lode, on line 2-3, cancelled Mineral Survey No. 2344, Twirler lode, monumented with a rock in place, projecting 2 ft. above the surface of the ground, plainly mkd. with a chiseled "X" at the corner point and 1-2585 alongside.</p>

319

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2585,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a brass tablet, 3¹/₄ ins. diam., 3¹/₂-in. stem, in drill hole of rock outcrop, encased in concrete, with top mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  <p>1998</p> </div>
	<p>Thence N. 71°51'30" E., on line 1-2, Mineral Survey No. 2585, Cyclops lode.</p>
0.251	<p>Intersect line 2-3, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 82°25'40" E., 2.993 chs. dist.</p>
3.186	<p>Intersect line 1-2, Mineral Survey No. 2583, Gold Wedge lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 16°45'40" W., 0.621 chs. dist.</p>
3.191	<p>Intersect line 1-2, Mineral Survey No. 2457, Hobo lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 18°28'00" E., 0.549 chs. dist.</p>
9.137	<p>Cor. No. 2, Mineral Survey No. 2585, Cyclops lode, identical with Cor. No. 3, Mineral Survey No. 2583, Gold Wedge lode, Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre lode and Cor. No. 1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, hereinbefore described.</p>
<p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2635, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>	
<p>(Restoring the survey executed by George E. Sherer in 1906)</p>	
<p>Great Eastern lode</p>	
<p>From Cor. No. 6, Mineral Survey No. 2635, Great Eastern lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p>	
<p>At the corner point in the center of the mound of stone</p>	
<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>	

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2635,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">2000</p>
	<p>Thence N. 65°17'50" E., on line 6-1, Mineral Survey No. 2635, Great Eastern lode.</p>
4.258	Intersect line 4-5, Snowy Range lode (unsurveyed), at a point from which Cor. No. 4, hereinbefore described, bears N. 61°39'00" W., 1.302 chs. dist.
6.521	Intersect line 4-1, Mineral Survey No. 2576, Eva Bell lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 0°55'20" W., 7.339 chs. dist.
9.376	Cor. No. 1, Mineral Survey No. 2635, Great Eastern lode, monumented with a rock in place, projecting 6 ft. above the surface of the ground, plainly mkd. with a chiseled "X" at the corner point and 1-2635 alongside. Not remonumented.
<hr/> <p>Great Eastern No. 1 lode</p>	
<p>From Cor. No. 3, cancelled Mineral Survey No. 2551, Index No. 1 lode, on line 3-4, Mineral Survey No. 2635, Great Eastern No. 1 lode and on line 6-1, Mineral Survey No. 2671, Peerless No. 3 lode, monumented with a phorphyry stone, 25x20x10 ins., firmly set 16 ins. in the ground, plainly mkd. 3-2551 on the W. face.</p>	
<p>At the corner point</p>	
<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>	
<p>T12S R46E</p>  <p style="text-align: center;">1998</p>	
<p>from which the original bearing object</p>	
<p style="text-align: center;">A "X BR-3 2551" chiseled on rock outcrop, 18x10x12 ft., bears N. 35°32' W., 0.573 chs. dist. (Record: N. 35°38' W.)</p>	
<p>Deposit the original cornerstone alongside the stainless steel post.</p>	

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2635,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS													
	<p>Thence N. 10°33'40" W., on a portion of line 3-4, Mineral Survey No. 2635, Great Eastern No. 1 lode, identical with line 3-2, cancelled Mineral Survey No. 2551, Index No. 1 lode.</p>												
7.307	<p>Intersect the E. and W. center line of sec. 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, hereinbefore described, bears S. 89°30'30" W., 6.882 chs. dist.</p>												
9.572	<p>Cor. No. 4, Mineral Survey No. 2635, Great Eastern No. 1 lode, identical with Cor. No. 2, cancelled Mineral Survey No. 2551, Index No. 1 lode, monumented with a mound of stone, with the top portion of a wooden post, 4x4 ins., 2 ft. long, mkd. 26 and the rest illegible, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p> <table style="margin: auto;"> <tr> <td>MS 2551</td> <td>MS 2635</td> </tr> <tr> <td>IL NO 1</td> <td>GEL NO 1</td> </tr> <tr> <td>COR 2</td> <td>COR 4</td> </tr> </table> <p>1998</p> </div> <p>Deposit top portion of original wooden post, inverted, in collar of stone.</p> <hr/> <p style="text-align: center;">Great Eastern No. 3 lode</p> <p>From Cor. No. 2, Mineral Survey No. 2635, Great Eastern No. 3 lode, monumented with a rhyolite stone, 18x10x10 ins., loosely set 8 ins. in the ground, plainly mkd. 2-2635 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin: auto;"> <tr> <td>MS 2635</td> <td>T12S</td> </tr> <tr> <td>GEL NO 3</td> <td>R46E</td> </tr> <tr> <td>COR 2</td> <td>S 9</td> </tr> </table> <p>1998</p> </div> <p>Deposit the original cornerstone alongside the stainless steel post.</p>	MS 2551	MS 2635	IL NO 1	GEL NO 1	COR 2	COR 4	MS 2635	T12S	GEL NO 3	R46E	COR 2	S 9
MS 2551	MS 2635												
IL NO 1	GEL NO 1												
COR 2	COR 4												
MS 2635	T12S												
GEL NO 3	R46E												
COR 2	S 9												
8.088	<p>Thence S. 0°57'20" E., on a portion of line 2-3, Mineral Survey No. 2635, Great Eastern No. 3 lode.</p> <p>Intersect the E. and W. center line of sec. 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, hereinbefore described, bears S. 89°30'30" W., 21.164 chs. dist.</p>												

322


DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2635,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS
14.663

Cor. No. 1, Mineral Survey No. 2635, Great Eastern No. 2 lode, on line 2-3, Mineral Survey No. 2635, Great Eastern No. 3 lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. illegible, laying alongside.

At the corner point

Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.



1998

Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2649,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

(Restoring the survey executed by
W.B. Milliken in 1906)

Noble Nan lode

From Cor. No. 2, Mineral Survey No. 2649, Noble Nan lode, monumented with a rock in place, projecting 2 ft. above the surface of the ground, plainly mkd. with a chiseled "X" at the corner point and 2-2649 alongside. Not remonumented.

Thence N. 2°58'10" E., on line 2-3, Mineral Survey No. 2649, Noble Nan lode.

1.755 Intersect the line bet. secs. 4 and 9, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, hereinbefore described, bears N. 88°33'30" E., 2.002 chs. dist.

22.746 Cor. No. 3, Mineral Survey No. 2649, Noble Nan lode, monumented with a mound of stone, with the top portion of a wooden post, 4x4 ins., 3 ft. long, mkd. illegible, laying alongside.

At the corner point in the center of the mound of stone

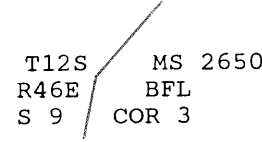
Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.

323

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2649,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


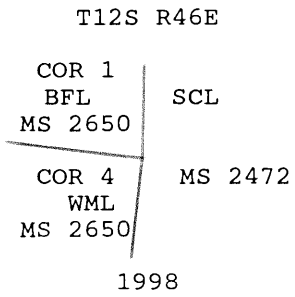
CHAINS	
	<p style="text-align: center;">T12S R46E S 4</p> <div style="border: 1px solid black; padding: 5px; margin: 10px auto; width: fit-content;"> <p style="text-align: center;">COR 3 NNL MS 2649</p> </div> <p style="text-align: center;">2000</p> <p>Deposit the original wooden post, inverted, in collar of stone.</p> <hr/> <p>From Cor. No. 4, Mineral Survey No. 2649, Noble Nan lode, monumented with a mound of stone, with the top portion of a wooden post, 4x4 ins., 3 ft. long, plainly mkd. 4-2649, laying alongside.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 8 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E S 4</p> <div style="border: 1px solid black; padding: 5px; margin: 10px auto; width: fit-content;"> <p style="text-align: center;">COR 4 NNL MS 2649</p> </div> <p style="text-align: center;">2000</p> <p>Deposit the original wooden post, inverted, in collar of stone.</p> <p>Cor. is located 0.20 chs. W. of a draw, drains. S.</p> <p>Thence S. 2°55'50" W., on line 4-1, Mineral Survey No. 2649, Noble Nan lode.</p>
20.950	<p>Intersect the line bet. secs. 4 and 9, at a point from which the ¹/₄ sec. cor. of secs. 4 and 9, hereinbefore described, bears N. 88°33'30" E., 11.121 chs. dist.</p>
22.746	<p>Cor. No. 1, Mineral Survey No. 2649, Noble Nan lode, monumented with a rhyolite stone, 24x10x8 ins., loosely set in a collar of stone, plainly mkd. 1-2649 on the E. face.</p> <p>At the corner point</p> <p>Set a brass tablet, 3¹/₄ ins. diam., 3¹/₂-in. stem, in drill hole of rock outcrop, encased in concrete, with top mkd.</p> <div style="border: 1px solid black; padding: 5px; margin: 10px auto; width: fit-content;"> <p style="text-align: center;">MS 2649 NNL COR 1</p> </div> <p style="text-align: center;">S 9</p> <p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">2000</p> <p>Raise a mound of stone, 2 ft. base, 1¹/₂ ft. high, E. of the cor. and place original cornerstone in mound of stone.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2650,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>(Restoring the survey executed by W.B. Milliken in 1906)</p> <hr/>
	<p>Bonanza Fraction lode</p>
	<p>From Cor. No. 2, Mineral Survey No. 2650, Bonanza Fraction lode, monumented with the original quartzite stone, 14x12 ins., firmly set, projecting 12 ins. above the ground, encircled in a collar of stone, plainly mkd. 2 2650 on the SE. face. Not remonumented.</p>
	<p>Thence N. 12°47'30" E., on line 2-3, Mineral Survey No. 2650, Bonanza Fraction lode.</p>
0.344	<p>Intersect line 3-4, Mineral Survey No. 2650, Trail Fraction lode, at a point from which Cor. No. 3, hereinafter described, bears S. 77°00'40" E., 0.387 chs. dist.</p>
5.813	<p>Intersect the E. and W. center line of sec. 9, at a point from which the center $\frac{1}{4}$ sec. cor. of sec. 9, hereinafter described, bears N. 89°30'30" E., 0.093 chs. dist.</p>
6.231	<p>Intersect the N. and S. center line of sec. 9, at a point from which the center $\frac{1}{4}$ sec. cor. of sec. 9, hereinafter described, bears S. 0°06'40" E., 0.407 chs. dist.</p>
9.466	<p>Cor. No. 3, Mineral Survey No. 2650, Bonanza Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p>
	<p>At the corner point in the center of the mound of stone</p>
	<p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<div style="text-align: center;">  <p>T12S MS 2650 R46E BFL S 9 COR 3</p> <p>1998</p> </div>
	<hr/> <p>From Cor. No. 5, Mineral Survey No. 2650, Bonanza Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p>
	<p>At the corner point in the center of the mound of stone</p>
	<p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 15 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

325

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2650,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>Thence S. 0°50'30" E., on line 5-1, Mineral Survey No. 2650, Bonanza Fraction lode.</p>
12.305	Intersect the E. and W. center line of sec. 9, at a point from which the center $\frac{1}{4}$ sec. cor. of sec. 9, hereinafter described, bears S. 89°30'30" W., 7.520 chs. dist.
18.069	Intersect line 1-2, Mineral Survey No. 2472, Sang De Cristo lode, at a point from which Cor. No. 1, hereinbefore described, bears N. 56°52'30" W., 2.835 chs. dist.
21.615	<p>Cor. No. 1, Mineral Survey No. 2650, Bonanza Fraction lode, identical with Cor. No. 4, Mineral Survey No. 2650, White Monument lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 18 ins. in the ground, encircled in a collar of stone, mkd. 4 2650 on the W. face and 1 on the S. face and the rest illegible.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T12S R46E</p>  </div> <p>Deposit the original wooden post, inverted, in collar of stone.</p> <hr/> <p style="text-align: center;">Trail Fraction lode</p> <p>From Cor. No. 3, Mineral Survey No. 2650, Trail Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

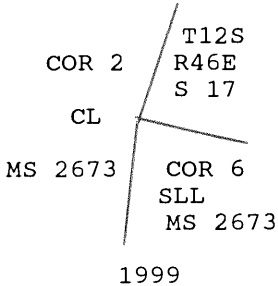

326

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2650,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS							
	<p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2650</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">COR 3</td> <td style="padding: 2px;">BFL</td> </tr> <tr> <td style="padding: 2px;">TFL</td> <td></td> </tr> <tr> <td style="padding: 2px;">MS 2650</td> <td></td> </tr> </table> </div> <p style="text-align: center;">2000</p> <p>Cor. is located 0.08 chs. W. of a draw, drains S. 40° E.</p> <p>Thence N. 77°00'40" W., on line 3-4, Mineral Survey No. 2650, Trail Fraction lode.</p>	COR 3	BFL	TFL		MS 2650	
COR 3	BFL						
TFL							
MS 2650							
0.387	<p>Intersect line 2-3, Mineral Survey No. 2650, Bonanza Fraction lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 12°47'30" W., 0.344 chs. dist.</p>						
2.834	<p>Cor. No. 4, Mineral Survey No. 2650, Trail Fraction lode, on line 4-1, Mineral Survey No. 2585, Side Scope lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p style="text-align: center;">2000</p> <p>Cor. is located 0.30 chs. E. of a draw, drains S. 50° E.</p>						
	<hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2673, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">(Restoring the survey executed by George E. Sherer in 1906)</p> <hr/> <p style="text-align: center;">Salt Lake lode</p> <p>From Cor. No. 6, Mineral Survey No. 2673, Salt Lake lode, identical with Cor. No. 2, Mineral Survey No. 2673, Corinne lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone.</p>						

327

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2673,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>  <p>Deposit the original wooden post remains alongside the stainless steel post.</p> <p>Thence S. 72°58'00" E., on line 6-1, Mineral Survey No. 2673, Salt Lake lode.</p> <p>6.227 Intersect the line bet. secs. 16 and 17, at a point from which the ¹/₄ sec. cor. of secs. 16 and 17, hereinbefore described, bears S. 0°42'50" E., 6.825 chs. dist.</p> <p>8.621 Intersect line 3-4, Mineral Survey No. 2491, Early Bird lode, at a point from which Cor. No. 3, hereinbefore described, bears S. 3°39'00" W., 3.849 chs. dist.</p> <p>9.567 Cor. No. 1, Mineral Survey No. 2673, Salt Lake lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 14 ins. in the ground, encircled in a collar of stone, mkd. illegible, with a mound of stone, 2¹/₂ ft. base, 1¹/₂ ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>  <p>Deposit the original wooden post, inverted, in collar of stone.</p> <hr/> <p>From Cor. No. 2, Mineral Survey No. 2673, Salt Lake lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. illegible, laying alongside.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2673,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">MS 2673 MS 2491 SLL UDL COR 2 UDL</p> <p style="text-align: center;">1998</p> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.</p> <p>Thence S. 10°39'40" E., on line 2-3, Mineral Survey No. 2673, Salt Lake lode.</p>
7.721	<p>Intersect line 2-3, Mineral Survey No. 2494, Ugly Duckling lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 80°48'00" W., 2.632 chs. dist.</p>
12.627	<p>Cor. No. 3, Mineral Survey No. 2673, Salt Lake lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 3-2673, laying alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">MS 2673 T12S SLL R46E COR 3 S16</p> <p style="text-align: center;">1998</p> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence N. 72°48'20" W., on line 3-4, Mineral Survey No. 2673, Salt Lake lode.</p>
6.366	<p>Intersect the line bet. secs. 16 and 17, at a point from which the ¹/₄ sec. cor. of secs. 16 and 17, hereinbefore described, bears N. 0°07'30" E., 14.035 chs. dist.</p>
10.169	<p>Cor. No. 4, Mineral Survey No. 2673, Salt Lake lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p>

329

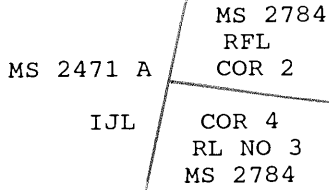
DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2673,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div>
	<p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2784, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p>(Restoring the survey executed by William J. Moran in 1906)</p>
	<p style="text-align: center;">Rand No. 2 lode</p> <p>From the point for Cor. No. 1, Mineral Survey No. 2784, Rand No. 2 lode, identical with Cor. No. 4, Mineral Survey No. 2539, Sunset No. 1 lode, Cor. No. 1, Mineral Survey No. 2784, Rand lode and Cor. No. 1, Mineral Survey No. 2784, Rand No. 1 lode, hereinbefore described.</p> <p>Thence N. 2°47'00" W., on line 1-2, Mineral Survey No. 2784, Rand No. 2 lode.</p>
10.856	<p>Intersect the line bet. secs. 10 and 15, at a point from which the witness cor. for the ¹/₄ sec. cor. of secs. 10 and 15, hereinbefore described, bears S. 89°53'30" W., 7.312 chs. dist.</p>
22.497	<p>Point for Cor. No. 2, Mineral Survey No. 2784, Rand No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2784, Rand No. 3 lode, determined at proportionate distance by the method of grant boundary adjustment; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.</p>
	<p>Thence S. 88°18'00" E., on line 2-3, Mineral Survey No. 2784, Rand No. 2 lode, identical with line 3-2, Mineral Survey No. 2784, Rand No. 3 lode.</p>
8.261	<p>Point for Cor. No. 3, Mineral Survey No. 2784, Rand No. 2 lode, identical with Cor. No. 2, Mineral Survey No. 2784, Rand No. 3 lode, and Cor. No. 3, cancelled Mineral Survey No. 3057, Pike lode, determined by the method of parallel end lines and record distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.</p>
	<p>Thence S. 3°54'00" E., on line 3-4, Mineral Survey No. 2784, Rand No. 2 lode, identical in part with line 3-2, cancelled Mineral Survey No. 3057, Pike lode and in part with a portion of line 2-3, cancelled Mineral Survey No. 3057, St. Joe lode.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2784,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 11.392</p>	<p>Intersect the line bet. secs. 10 and 15, at a point from which the cor. of secs. 10, 11, 14 and 15, hereinbefore described, bears N. 89°53'30" E., 14.259 chs. dist.</p>																		
<p>22.536</p>	<p>Point for Cor. No. 4, Mineral Survey No. 2784, Rand No. 2 lode, identical with Cor. No. 2, Mineral Survey No. 2784, Rand No. 1 lode, on line 2-3, cancelled Mineral Survey No. 3057, St. Joe lode, determined by the method of parallel end lines and record distance; there is no remaining evidence of the original corner. Point falls in an active mining area where it is impractical to establish a permanent monument.</p>																		
	<p>Thence N. 88°18'00" W., on line 4-1, Mineral Survey No. 2784, Rand No. 2 lode, identical with line 2-1, Mineral Survey No. 2784, Rand No. 1 lode.</p>																		
<p>8.702</p>	<p>The point for Cor. No. 1, Mineral Survey No. 2784, Rand No. 2 lode, identical with Cor. No. 4, Mineral Survey No. 2539, Sunset No. 1 lode, Cor. No. 1, Mineral Survey No. 2784, Rand lode and Cor. No. 1, Mineral Survey No. 2784, Rand No. 1 lode, and the place of beginning.</p>																		
	<p style="text-align: center;">Rand No. 3 lode</p> <p>From Cor. No. 1, Mineral Survey No. 2784, Rand No. 3 lode, identical with Cor. No. 1, Mineral Survey No. 2784, Rand Fraction lode, monumented with a mound of stone. This mound of stone correlates well with other existing corners and is accepted as the best available evidence of the original corner position.</p> <p>At the corner point in the center of the mound of stone</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>																		
	<p style="text-align: center;">T12S R46E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">MS 2784</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td style="text-align: center;">MS 2540</td> </tr> <tr> <td style="text-align: center;">RFL</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td style="text-align: center;">RBL</td> </tr> <tr> <td style="text-align: center;">COR 1</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td></td> </tr> <tr> <td style="text-align: center;">COR 1</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td></td> </tr> <tr> <td style="text-align: center;">RL NO. 3</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td></td> </tr> <tr> <td style="text-align: center;">MS 2784</td> <td style="border-left: 1px solid black; padding-left: 5px;"></td> <td></td> </tr> </table> <p style="text-align: center;">1999</p>	MS 2784		MS 2540	RFL		RBL	COR 1			COR 1			RL NO. 3			MS 2784		
MS 2784		MS 2540																	
RFL		RBL																	
COR 1																			
COR 1																			
RL NO. 3																			
MS 2784																			
	<p>From this point, U.S. Location Monument No. 175, bears N. 5°16'30" E., 21.812 chs. dist., monumented with a rock in place, projecting 2 ft. above the surface of the ground, plainly mkd. with a chiseled "X" and USLM 175 alongside. (Record: N. 5°20'15" E.)</p>																		
	<p>Thence S. 11°45'40" W., on line 1-2, Mineral Survey No. 2784, Rand No. 3 lode, identical in part with line 4-3, cancelled Mineral Survey No. 3057, Pike lode.</p>																		

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2784,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 22.310</p>	<p>The point for Cor. No. 2, Mineral Survey No. 2784, Rand No. 3 lode, identical with Cor. No. 3, Mineral Survey No. 2784, Rand No. 2 lode and Cor. No. 3, cancelled Mineral Survey No. 3057, Pike lode, hereinbefore described.</p>
	<p>From the point for Cor. No. 3, Mineral Survey No. 2784, Rand No. 3 lode, identical with Cor. No. 2, Mineral Survey No. 2784, Rand No. 2 lode, hereinbefore described.</p> <p>Thence N. 9°27'00" E., on line 3-4, Mineral Survey No. 2784, Rand No. 3 lode.</p>
7.566	<p>Intersect line 4-1, Mineral Survey No. 2539, Sunset No. 2 lode, at a point from which Cor. No. 4, hereinbefore described, bears N. 17°46'00" E., 9.143 chs. dist.</p>
16.077	<p>Intersect line 3-4, Mineral Survey No. 2539, Sunset No. 2 lode, at a point from which Cor. No. 4, hereinbefore described, bears N. 77°23'00" E., 1.426 chs. dist.</p>
22.170	<p>Cor. No. 4, Mineral Survey No. 2784, Rand No. 3 lode, identical with Cor. No. 2, Mineral Survey No. 2784, Rand Fraction lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 2784, laying alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1999</p> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of wooden post, inverted, in collar of stone.</p>
9.167	<p>Thence S. 88°18'00" E., on line 4-1, Mineral Survey No. 2784, Rand No. 3 lode, identical with line 2-1, Mineral Survey No. 2784, Rand Fraction lode.</p> <p>Cor. No. 1, Mineral Survey No. 2784, Rand No. 3 lode, identical with Cor. No. 1, Mineral Survey No. 2784, Rand Fraction lode, hereinbefore described.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 3156,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

(Restoring the survey executed by
John S. Hamman in 1907)


Sleeper lode

From Cor. No. 1, Mineral Survey No. 3156, Sleeper lode, identical with Cor. No. 2, cancelled Mineral Survey No. 3392, Speculator Fraction lode, on line 5-1, cancelled Mineral Survey No. 3392, Red Fox lode, monumented with a wooden post, 4x4 ins., 4 ft. long, firmly set 14 ins. in the ground, encircled in a collar of stone, mkd. 2-3392 on the N. face and 1-3156 on the E. face, with a rebar established by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, $\frac{5}{8}$ in. diam., 24 ins. long, loosely set alongside the wooden post, with aluminum cap mkd. 3156-1 LS 4248.

At the corner point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T12S R46E



1998

Place rebar inside the stainless steel post and deposit original wooden post, inverted, in collar of stone.

Thence S. 77°09'40" E., on line 1-2, Mineral Survey No. 3156, Sleeper lode.

7.233 True point for Cor. No. 2, Mineral Survey No. 3156, Sleeper lode, determined at record distance from the witness cor. for Cor. No. 2, Mineral Survey No. 3156, Sleeper lode, on the extension from Cor. No. 3, Mineral Survey No. 3156, Sleeper lode, hereinafter described. Point not monumented.

Thence S. 10°45'10" E., on line 2-3, Mineral Survey No. 3156, Sleeper lode.

0.059 Witness cor. for Cor. No. 2, Mineral Survey No. 3156, Sleeper lode, determined by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, loosely set in the center of a collar of stone, with aluminum cap erroneously mkd. 3156-2 LS 4248. This is accepted as the best available evidence of the original corner position.

333

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 3156,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 8 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3¹/₂ ft. base, to top, with brass cap mkd.</p> <div data-bbox="844 430 1031 693" style="text-align: center;"> </div> <p>1998</p>
	<p>Place rebar inside the stainless steel post.</p>
1.971	<p>Intersect the E. and W. center line of sec. 9, at a point from which the C-E ¹/₁₆ sec. cor. of sec. 9, hereinafter described, bears S. 89°30'30" W., 0.181 chs. dist.</p>
11.809	<p>Cor. No. 3, Mineral Survey No. 3156, Sleeper lode, identical with Cor. No. 4, cancelled Mineral Survey No. 3369, Gurley lode, determined by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, monumented with a rebar, ⁵/₈ in. diam., 24 ins. long, firmly set 16 ins. in the ground, with aluminum cap mkd. 3156-3 LS 4248. This is accepted as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div data-bbox="779 1218 1063 1480" style="text-align: center;"> </div> <p>1998</p>
	<p>Place rebar inside the stainless steel post.</p> <p>From this point, the corner of fences extending S. and E. bears S. at 0.015 chs. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. 10°54'10" W., on line 3-4, Mineral Survey No. 3156, Sleeper lode, identical with a portion of line 4-3, cancelled Mineral Survey No. 3369, Gurley lode.</p>
0.272	<p>Intersect the E. and W. center line of the NE¹/₄ of the SE¹/₄ of sec. 9, at a point from which the C-N-SE ¹/₆₄ sec. cor. of sec. 9, hereinafter described, bears S. 89°40'00" W., 1.961 chs. dist.</p>

334


DEPENDENT RESURVEY OF MINERAL SURVEY NO. 3156,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS
9.394

Cor. No. 4, Mineral Survey No. 3156, Sleeper lode, on line 1-2, cancelled Mineral Survey No. 2472, Little Marie lode and on line 3-4, cancelled Mineral Survey No. 3369, Gurley lode, determined by John V. Caseleli, Nevada Professional Land Surveyor No. 451, monumented with a rebar, $\frac{1}{2}$ in. diam., 14 ins. long, firmly set 13 ins. in the ground, with attached metal tag mkd. RLS 451. This corner was further perpetuated by Bruce L. Rice, Nevada Professional Land Surveyor No. 4248, monumented with a rebar, $\frac{5}{8}$ in. diam., 24 ins. long, firmly set 14 ins. in the ground, over the $\frac{1}{2}$ in. diam. rebar, with aluminum cap mkd. 3156-4 RLS 4248. Both rebars were found in a mound of stone, 2 ft. base, 1 ft. high. This is accepted as the best available evidence of the original corner position.

At the corner point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.



Place rebars inside the stainless steel post.

Cor. is located in fenced lot, 0.80 chs. N. of fence, bears E. and W.

Thence N. $77^{\circ}09'10''$ W., on line 4-5, Mineral Survey No. 3156, Sleeper lode, identical with a portion of line 2-1, cancelled Mineral Survey No. 2472, Little Marie lode.

0.237 Intersect the N. and S. center line of the $SE\frac{1}{4}$ of sec. 9, at a point from which the $SE\frac{1}{16}$ sec. cor. of sec. 9, hereinafter described, bears S. $0^{\circ}01'30''$ E., 1.048 chs. dist.

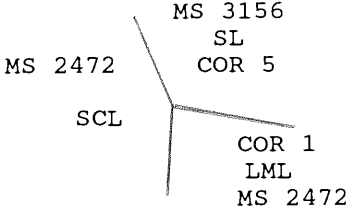
6.212 Cor. No. 5, Mineral Survey No. 3156, Sleeper lode, identical with Cor. No. 1, cancelled Mineral Survey No. 2472, Little Marie lode, on line 2-3, Mineral Survey No. 2472, Sang De Cristo lode, monumented with the decayed remains of the wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 5 and the rest illegible, laying alongside.

At the corner point

Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.

335

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 3156,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">1998</p> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of the wooden post, inverted, in collar of stone.</p>
8.273	<p>Thence N. 9°02'10" W., on line 5-6, Mineral Survey No. 3156, Sleeper lode.</p> <p>Point for Cor. No. 6, Mineral Survey No. 3156, Sleeper lode, on line 1-2, Mineral Survey No. 2472, Sang De Cristo lode and on line 4-5, cancelled Mineral Survey No. 3392, Red Fox lode, determined by the method of grant boundary adjustment; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
2.869	<p style="text-align: center;">T12S R46E</p>  <p style="text-align: center;">2000</p> <p>Cor. is located 0.15 chs. E. of a draw, drains SE.</p> <p>Thence N. 1°22'20" E., on line 6-7, Mineral Survey No. 3156, Sleeper lode.</p> <p>Cor. No. 7, Mineral Survey No. 3156, Sleeper lode, monumented with the decayed remains of a wooden post, 4x4 ins., encircled in a collar of stone, with the top portion of the wooden post, 4x4 ins., 2 ft. long, mkd. 7-3156, laying alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

336

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 3156,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS								
	<div style="text-align: center;"> <table border="0"> <tr> <td>T12S</td> <td rowspan="3" style="font-size: 2em; vertical-align: middle;">}</td> <td>MS 3156</td> </tr> <tr> <td>R46E</td> <td>SL</td> </tr> <tr> <td>S 9</td> <td>COR 7</td> </tr> </table> <p>1998</p> </div> <p>Deposit the original wooden post remains alongside the stainless steel post and place top portion of the wooden post, inverted, in collar of stone.</p> <hr/> <p>Thence N. 1°05'50" W., on line 7-1, Mineral Survey No. 3156, Sleeper lode.</p>	T12S	}	MS 3156	R46E	SL	S 9	COR 7
T12S	}	MS 3156						
R46E		SL						
S 9		COR 7						
6.410	Intersect the E. and W. center line of sec. 9, at a point from which the center $\frac{1}{4}$ sec. cor. of sec. 9, hereinafter described, bears S. 89°30'30" W., 12.863 chs. dist.							
10.015	Cor. No. 1, Mineral Survey No. 3156, Sleeper lode, identical with Cor. No. 2, cancelled Mineral Survey No. 3392, Speculator Fraction lode, on line 5-1, cancelled Mineral Survey No. 3392, Red Fox lode, and the place of beginning.							
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 5086, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>(Restoring the survey executed by Earnest E. Schaff in 1993)</p> <hr/> <p>Ladd #3 lode</p> <p>From the point for Cor. No. 4, Mineral Survey No. 5086, Ladd #3 lode, identical with Cor. No. 3, Mineral Survey No. 5086, Ladd #4 lode, on line 1-2, Mineral Survey No. 5086, Ladd #5 lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.</p> <p>Thence East, on line 4-1, Mineral Survey No. 5086, Ladd #3 lode.</p>								
5.891	Intersect line 2-3, Mineral Survey No. 2539, Sunset No. 2 lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 13°51'00" E., 7.669 chs. dist.							
9.091	Point for Cor. No. 1, Mineral Survey No. 5086, Ladd #3 lode, identical with Cor. No. 2, Mineral Survey No. 5086, Ladd #4 lode, determined at record bearing and distance; there is no remaining evidence of the original corner. Point falls in a mining reclaim area where it is impractical to establish a permanent monument.							
8.567	<hr/> <p>Thence South, on line 1-2, Mineral Survey No. 5086, Ladd #3 lode.</p> <p>Intersect line 1-2, Mineral Survey No. 2539, Sunset No. 1 lode, identical with line 1-2, Mineral Survey No. 2539, Sunset No. 2 lode, at a point from which Cors. No. 1, respectively, hereinbefore described, bears N. 77°23'00" E., 3.369 chs. dist.</p>							

337

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 5086,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 18.061</p>	<p>Intersect the line bet. secs. 10 and 15, at a point from which the witness cor. to the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, hereinbefore described, bears S. $89^{\circ}53'30''$ W., 1.859 chs. dist.</p>	
<p>18.182</p>	<p>Cor. No. 2, Mineral Survey No. 5086, Ladd #3 lode, monumented with an aluminum post, $2\frac{1}{2}$ ins. diam., firmly set, projecting 14 ins. above the ground, in a collar of stone, with a wooden post, 4x4 ins., alongside, with aluminum cap mkd.</p>	
<p>MS 5086 LADD 3 2</p>		
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 5093, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN</p> <hr/>		
<p>(Restoring the survey executed by Earnest E. Schaaf in 1993)</p> <hr/>		
<p>Little Bev #9 lode</p>		
<p>From the point for Cor. No. 2, Mineral Survey No. 5093, Little Bev #9 lode, determined at record bearing and distance; there is no remaining evidence of the original corner; Point falls in an active mining area where it is impractical to establish a permanent monument.</p>		
<p>Thence West, on line 2-3, Mineral Survey No. 5093, Little Bev #9 lode.</p>		
<p>5.510</p>	<p>Calculated intersection of line 4-5, Mineral Survey No. 3125, Grand Prize lode, based on the official record of Mineral Survey No. 5093. All corners of the Grand Prize were destroyed by mining operations and the position were determined by utilizing survey ties by David L. Hough, Nevada Professional Land Surveyor No. 5876 as reported in the mineral survey record.</p>	
<p>18.173</p>	<p>Intersect the line bet. secs. 15 and 16, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, hereinbefore described, bears N. $0^{\circ}05'10''$ W., 17.285 chs. dist.</p>	
<p>18.182</p>	<p>Cor. No. 3, Mineral Survey No. 5093, Little Bev #9 lode, monumented with an aluminum post, $2\frac{1}{2}$ ins. diam., firmly set 2 ins. below the ground, with aluminum cap mkd.</p>	
<p>MS 5093</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">LITTLE BEV 9 3</td> </tr> </table> <hr/>		LITTLE BEV 9 3
LITTLE BEV 9 3		

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 5093,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Thence N. 0°00'30" E., on line 3-4, Mineral Survey No. 5093, Little Bev #9 lode.
2.435	Intersect line 3-4, Mineral Survey No. 2377, North Star lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 87°12'40" E., 4.221 chs dist.
5.199	Intersect the line bet. secs. 15 and 16 at a point from which the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, hereinbefore described, bears N. 0°05'10" W., 12.086 chs. dist.
9.087	Cor. No. 4, Mineral Survey No. 5093, Little Bev #9 lode, identical with Cor. No. 3, Mineral Survey No. 5093, Golden Age #9 lode, monumented with an aluminum post, 2 $\frac{1}{2}$ ins. diam., firmly set, projecting 10 ins. above the ground, in a collar of stone, with aluminum cap mkd.
	<p style="text-align: center;">MS 5093</p> <div style="border: 1px solid black; padding: 5px; margin-left: auto; margin-right: auto;"> <p style="text-align: center;">GOLDEN AGE 9 3</p> </div>
	<p style="text-align: center;">Golden Age #9 lode</p> <p>From Cor. No. 3, Mineral Survey No. 5093, Golden Age #9 lode, identical with Cor. No. 4, Mineral Survey No. 5093, Little Bev #9 lode, hereinbefore described.</p> <p>Thence North, on line 3-4, Mineral Survey No. 5093, Golden Age #9 lode.</p>
15.521	Intersect line 1-2, Mineral Survey No. 2377, North Star lode, at a point from which Cor. No. 4, cancelled Mineral Survey No. 2348, Hardscrabble lode, bears N. 87°12'40" E., 0.014 chs. dist. and Cor. No. 2 of the North Star lode, bears N. 87°12'40" E., 0.189 chs. dist., both hereinbefore described.
22.730	Cor. No. 4, Mineral Survey No. 5093, Golden Age #9 lode, monumented with an aluminum post, 2 $\frac{1}{2}$ ins diam., firmly set, projecting 10 ins. above the ground, with aluminum cap mkd.
	<p style="text-align: center;">MS 5093</p> <div style="border: 1px solid black; padding: 5px; margin-left: auto; margin-right: auto;"> <p style="text-align: center;">4 GOLDEN AGE 9</p> </div>
	<p style="text-align: center;">Golden Age #17 lode</p> <p>From Cor. No. 3, Mineral Survey No. 5093, Golden Age #17 lode, identical with Cor. No. 4, Mineral Survey No. 5093, Golden Age #14 lode, monumented with an aluminum post, 2$\frac{1}{2}$ ins. diam., firmly set, projecting 12 ins. above the ground, with aluminum cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 5093,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS			
	<p style="text-align: center;">MS 5093</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">GOLDEN AGE 17 3</td> </tr> <tr> <td style="padding: 2px;">4 GOLDEN AGE 14</td> </tr> </table> <p>Thence N. 0°01'30" W., on line 3-4, Mineral Survey No. 5093, Golden Age #17 lode.</p>	GOLDEN AGE 17 3	4 GOLDEN AGE 14
GOLDEN AGE 17 3			
4 GOLDEN AGE 14			
7.350	Intersect the line bet. secs. 10 and 15, at a point from which the cor. of secs. 9, 10, 15 and 16, hereinbefore described, bears S. 89°53'30" W., 4.539 chs. dist.		
9.087	Cor. No. 4, Mineral Survey No. 5093, Golden Age #17 lode, monumented with an aluminum post, 2½ ins. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd.		
	<p style="text-align: center;">MS 5093</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">4 GOLDEN AGE 17</td> </tr> </table>	4 GOLDEN AGE 17	
4 GOLDEN AGE 17			
<hr/> <p>SUBDIVISION OF SECTION 9, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>			
	<p>From the ¼ sec. cor. of secs. 9 and 16.</p> <p>N. 0°06'40" W., on the N. and S. center line of sec. 9.</p> <p>Over rolling to broken terrain.</p>		
3.786	Intersect line 4-1, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with line 3-2, Mineral Survey No. 2585, Cyclops lode, at a point from which Cor. No. 4, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2585, Cyclops lode, hereinbefore described, bears N. 12°37'40" W., 6.946 chs. dist.		
11.316	Intersect line 3-4, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, at a point from which Cor. No. 4, Mineral Survey No. 2584, Golden Sceptre No. 2 lode, identical with Cor. No. 3, Mineral Survey No. 2585, Cyclops lode, hereinbefore described, bears S. 63°26'20" W., 1.682 chs. dist.		
19.780	Point for the C-S 1/16 sec. cor. of sec. 9.		
	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>		

SUBDIVISION OF SECTION 9,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">C S 1/16 S 9 C</p> <p style="text-align: center;">1998</p>
39.560	<p>Point for the center $\frac{1}{4}$ sec. cor. of sec. 9, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T12S R46E</p> <p style="text-align: center;">C 1/4 S 9</p> <p style="text-align: center;">1998</p> <p>From this point, Cor. No. 3, cancelled Rhyolite Townsite, bears N. $18^{\circ}08'$ E., 0.315 chs. dist., monumented with a rhyolite stone, 10x5 ins., firmly set, projecting 10 ins. above the ground, plainly mkd. RCL 3 on the S. face.</p>
39.967	<p>Intersect line 2-3, Mineral Survey No. 2650, Bonanza Fraction lode, at a point from which Cor. No. 3, hereinbefore described, bears N. $12^{\circ}47'30''$ E., 3.235 chs. dist.</p>
80.000	<p>The $\frac{1}{4}$ sec. cor. of secs. 4 and 9.</p> <hr/> <p>From the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.</p> <p>Over rolling to broken terrain.</p> <p>S. $89^{\circ}30'30''$ W., on the E. and W. center line of sec. 9.</p>
10.017	<p>Point for the C-E-E $\frac{1}{64}$ sec. cor. of sec. 9. Point not monumented.</p>
19.853	<p>Intersect line 2-3, Mineral Survey No. 3156, Sleeper lode, at a point from which the witness cor. for Cor. No. 2, hereinbefore described, bears N. $10^{\circ}45'10''$ W., 1.912 chs. dist.</p>
20.034	<p>Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, over a plastic-encased magnet and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">E 1/16 C ——— C S 9</p> <p style="text-align: center;">1998</p>
27.205	<p>Intersect line 7-1, Mineral Survey No. 3156, Sleeper lode, at a point from which Cor. No. 1, hereinbefore described, bears N. $1^{\circ}05'50''$ W., 3.605 chs. dist.</p>

SUBDIVISION OF SECTION 9,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
32.548	Intersect line 5-1, Mineral Survey No. 2650, Bonanza Fraction lode, at a point from which Cor. No. 1, identical with Cor. No. 4, Mineral Survey No. 2650, White Monument lode, hereinbefore described, bears S. 0°50'30" E., 9.310 chs. dist.
40.068	The center $\frac{1}{4}$ sec. cor. of sec. 9.
40.161	Intersect line 2-3, Mineral Survey No. 2650, Bonanza Fraction lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 12°47'30" E., 3.653 chs. dist.
59.125	Intersect line 2-3, Mineral Survey No. 2635, Great Eastern No. 3 lode, at a point from which Cor. No. 2, hereinbefore described, bears N. 0°57'20" W., 8.088 chs. dist.
73.407	Intersect line 3-4, Mineral Survey No. 2635, Great Eastern No. 1 lode, at a point from which Cor. No. 4, hereinbefore described, bears N. 10°33'40" W., 2.265 chs. dist.
80.289	The $\frac{1}{4}$ sec. cor. of secs. 8 and 9.
	<hr/> <p>From the E $\frac{1}{16}$ sec. cor. of secs. 9 and 16.</p> <p>N. 0°01'30" W., on the N. and S. center line of the SE$\frac{1}{4}$ of sec. 9.</p> <p>Over rolling terrain.</p>
19.889	Point for the SE $\frac{1}{16}$ sec. cor. of sec. 9, at intersection with the E-W center line of the SE $\frac{1}{4}$.
	<p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S 9</p> <p style="text-align: center;">1998</p>
20.55	Wire fence, bears N. 85° W. and S. 85° E.
20.937	Intersect line 4-5, Mineral Survey No. 3156, Sleeper lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 77°09'10" E., 0.237 chs. dist.
22.45	Wire fence, bears N. 78° E. and S. 78° W.
29.830	Point for the C-N-SE $\frac{1}{64}$ sec. cor. of sec. 9.
	<p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S 9</p> <p style="text-align: center;">C-N-SE</p> <p style="text-align: center;">1/64</p> <p style="text-align: center;">1998</p>
39.771	The C-E $\frac{1}{16}$ sec. cor. of sec. 9.

SUBDIVISION OF SECTION 9,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the S $\frac{1}{16}$ sec. cor. of secs. 9 and 10.</p> <p>S. 89°49'30" W., on the E. and W. center line of the SE$\frac{1}{4}$ of sec. 9.</p> <p>Over rolling terrain.</p>
10.002	Point for the C-E-SE $\frac{1}{64}$ sec. cor. of sec. 9. Point not monumented.
14.00	Improved dirt road, 30 lks. wide, bears N. 45° E. and S. 45° W.
15.003	<p>The C-W-E-SE $\frac{1}{256}$ sec. cor. of sec. 9, determined by Earnest E. Schaaf, Nevada Professional Land Surveyor No. 10320, monumented with an aluminum post, 2$\frac{1}{2}$ ins. diam., firmly set, projecting 18 ins. above the ground, in a collar of stone, with a steel fence post alongside, with aluminum cap mkd. PROP COR 1995 RLS 10320. This is accepted as a careful and faithful determination of the corner position.</p> <p>From this point, a point established by person(s) unknown bears N. 47°54' E., 0.309 chs. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., firmly set, projecting 8 ins. above the ground. This point was not utilized during the course of this survey.</p> <hr/> <p>S. 89°49'50" W., beginning new measurement.</p>
5.000	The SE $\frac{1}{16}$ sec. cor. of sec. 9.
10.004	<p>The C-E-W-SE $\frac{1}{256}$ sec. cor. of sec. 9, determined by Earnest E. Schaaf, Nevada Professional Land Surveyor No. 10320, monumented with an aluminum post, 2$\frac{1}{2}$ ins. diam., firmly set, projecting 18 ins. above the ground, in a collar of stone, with a steel fence post alongside, with aluminum cap mkd. PROP COR 1995 RLS 10320. This is accepted as a careful and faithful determination of the corner position.</p> <p>From this point, a point established by person(s) unknown bears N. 7°30' E., 0.133 chs. dist., monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, encircled in a collar of stone. This point was not utilized during the course of this survey.</p> <hr/> <p>S. 89°47'40" W., beginning new measurement.</p>
0.835	Intersect line 2-3, Mineral Survey No. 2472, Sang De Cristo lode, at a point from which Cor. No. 3, hereinbefore described, bears S. 0°18'10" W., 13.037 chs. dist.
5.000	Point for the C-W-SE $\frac{1}{64}$ sec. cor. of sec. 9. Point not monumented.
15.000	The C-S $\frac{1}{16}$ sec. cor. of sec. 9.
	<hr/> <p>From the point for the C-E-SE $\frac{1}{64}$ sec. cor. of sec. 9.</p> <p>N. 0°01'10" E., on the N. and S. center line of the NE$\frac{1}{4}$ of the SE$\frac{1}{4}$ of sec. 9.</p> <p>Over rolling terrain.</p>

SUBDIVISION OF SECTION 9,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
6.75	Improved dirt road, 30 lks. wide, bears N. 29° E. and S. 29° W.
9.970	Point for the NE-SE $\frac{1}{64}$ sec. cor. of sec. 9, at intersection with the E-W center line of the NE $\frac{1}{4}$ of the SE $\frac{1}{4}$. Point not monumented.
19.940	The point for the C-E-E $\frac{1}{64}$ sec. cor. of sec. 9.
	<hr/> <p>From the point for the N-S $\frac{1}{64}$ sec. cor. of secs. 9 and 10.</p> <p>S. 89°40'00" W., on the E. and W. center line of the NE$\frac{1}{4}$ of the SE$\frac{1}{4}$ of sec. 9.</p> <p>Over rolling terrain.</p>
7.70	Improved dirt road, 30 lks. wide, bears N. 46° E. and S. 46° W.
10.010	The point for the NE-SE $\frac{1}{64}$ sec. cor. of sec. 9.
14.95	Wire fence, bears N. 1° W. and S. 1° E.
15.015	Point for the C-W-NE-SE $\frac{1}{256}$ sec. cor. of sec. 9.
	<p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 9 C-W-NE-SE 1/256 1998</p> <p>From this point, a point established by person(s) unknown bears N. 13°24' E., 0.258 chs. dist., monumented with a rebar, $\frac{1}{2}$ in. diam., firmly set, projecting 6 ins. above the ground. This point was not utilized during the course of this survey.</p> <p>From this same point, the intersection of fences extending S. and W. bears N. 18°30' E., 0.162 chs. dist.</p>
18.05	Wire fence, bears N. 11° E. and S. 11° W.
18.059	Intersect line 3-4, Mineral Survey No. 3156, Sleeper lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 10°54'10" E., 0.272 chs. dist.
20.020	The C-N-SE $\frac{1}{64}$ sec. cor. of sec. 9.
	<hr/> <p>From the C-W-E-SE $\frac{1}{256}$ sec. cor. of sec. 9.</p> <p>North, on the N. and S. center line of the SW$\frac{1}{4}$ of the NE$\frac{1}{4}$ of the SE$\frac{1}{4}$ of sec. 9.</p>
0.20	Wire fence, bears E. and W., 0.25 chs. W. of the intersection of fences extending N. and W.
9.955	The C-W-NE-SE $\frac{1}{256}$ sec. cor. of sec. 9.

METES-AND-BOUNDS SURVEY OF A PORTION
OF NEVADA STATE HIGHWAY NO. 374,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
	<p>Beginning at the center line of Nevada State Highway No. 374, at Sta. 369+89.27 POT, as shown on Plan and Profile Sheet No. 6, Project FLH No. 13, obtained from the Nevada Highway Department. The position is determined from the highway reference monuments.</p> <p>At the corner point</p> <p>Set PK nail flush with the asphalt surface.</p> <p>From which</p> <p style="padding-left: 40px;">A reference monument bears S. 44°06'40" E., 3.030 chs. dist. monumented with a pin, $\frac{1}{8}$ in. diam. encased in a concrete post, 6x6 ins., firmly set, projecting 8 ins. above the ground, with no mks. visible.</p> <p style="padding-left: 40px;">A reference monument bears N. 44°06'40" W., 3.030 chs. dist. monumented with a pin, $\frac{1}{8}$ in. diam. encased in a concrete post, 6x6 ins., firmly set, projecting 8 ins. above the ground, mkd. N on the SE. face.</p> <p>From this point, the cor. of secs. 27, 28, 33 and 34, hereinbefore described, bears S. 64°49'10" E., 79.159 chs. dist.</p> <p>Thence N. 45°53'20" E., the geodetic mean bearing of a straight line, at this point the forward bearing is N. 45°52'40" E., on the center line of Nevada State Highway No. 374.</p> <p>Along asphalt surface road, 48 lks. wide.</p>
74.880	<p>The point for the center line of Nevada State Highway No. 374, at Sta. 419+31.04 POT, as shown on Plan and Profile Sheet No. 6, Project FLH No. 13, obtained from the Nevada Highway Department, at proportionate distance; there is no remaining evidence of the reference monuments. Point not monumented.</p>
99.563	<p>Intersect the line bet. secs. 21 and 22, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, hereinbefore described, bears N. 0°03'40" W., 17.206 chs. dist.</p>
109.906	<p>The point for Angle Pt. No. 9, Tract 37, hereinafter described.</p> <p>Continue on the center line of Nevada State Highway No. 372, identical with line 9-8, Tract 37.</p>
142.808	<p>The point for Angle Pt. No. 8, Tract 37, hereinafter described.</p> <p>Continue on the center line of Nevada State Highway No. 372.</p>
151.093	<p>The point for the center line of Nevada State Highway No. 374, at Sta. 469+60.77 POT, as shown on Plan and Profile Sheet No. 7, Project FLH No. 13, obtained from the Nevada Highway Department, at proportionate distance; there is no remaining evidence of the reference monuments. Point not monumented.</p>
161.048	<p>The point for Angle Pt. No. 18, Tract 37, hereinafter described.</p> <p>Continue on the center line of Nevada State Highway No. 372, identical with line 18-1, Tract 37.</p>

345




METES-AND-BOUNDS SURVEY OF A PORTION
OF NEVADA STATE HIGHWAY NO. 374,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 181.767	Intersect the line bet. secs. 15 and 22, at a point from which the cor. of secs. 14, 15, 22 and 23, hereinbefore described, bears S. 89°58'50" E., 20.939 chs. dist.
185.279	The point for Angle Pt. No. 1, Tract 37, hereinafter described. Continue on the center line of Nevada State Highway No. 372.
210.910	Intersect the line bet. secs. 14 and 15, at a point from which the cor. of secs. 14, 15, 22 and 23, hereinbefore described, bears S. 0°02'00" E., 20.291 chs. dist.
226.808	<p>The center line of Nevada State Highway No. 374, at Sta. 519+57.70 POT, as shown on Plan and Profile Sheet No. 8, Project FLH No. 13, obtained from the Nevada Highway Department. The position is determined from the highway reference monuments. Point not monumented.</p> <p>From which</p> <p style="padding-left: 40px;">A reference monument bears S. 44°06'40" E., 3.030 chs. dist. monumented with a pin, $\frac{1}{8}$ in. diam. encased in a concrete post, 6x6 ins., firmly set, projecting 5 ins. above the ground, mkd. N on the NW. face.</p> <p style="padding-left: 40px;">A reference monument bears N. 44°06'40" W., 3.030 chs. dist. monumented with a pin, $\frac{1}{8}$ in. diam. encased in a concrete post, 6x6 ins., firmly set, projecting 4 ins. above the ground, mkd. N on the SE. face.</p> <p>From this point, the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, hereinbefore described, bears N. 52°15'40" W., 14.450 chs. dist.</p>
<hr/> <p>METES-AND-BOUNDS SURVEY OF TRACT 37, T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
	<p>Beginning at the point for Angle Pt. No. 1, Tract 37, on the center line of Nevada State Highway No. 374.</p> <p>Set PK nail flush with the asphalt surface.</p> <p>From this point, the point for Sta. 519+57.70 POT, Nevada State Highway No. 374, hereinbefore described, bears N. 45°53'20" E., 41.529 chs.</p> <p>N. 44°23'20" W., on line 1-2, Tract 37.</p> <p>Over nearly level terrain.</p>
1.771	<p>Point selected for a witness point on line 1-2, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;">  </div> <p style="text-align: center;">1998</p>
19.692	<p>Point for Angle Pt. No. 2, Tract 37. Point falls in a active mining area where it is impractical to establish a permanent monument.</p> <hr/> <p>N. 87°27'40" W., on line 2-3, Tract 37.</p> <p>Over active mining area.</p>
11.511	<p>Point for Angle Pt. No. 3, Tract 37. Point falls in a active mining area where it is impractical to establish a permanent monument.</p> <hr/> <p>S. 0°05'10" E., on line 3-4, Tract 37.</p> <p>Over active mining area.</p>
17.019	<p>Point for Angle Pt. No. 4, Tract 37. Point falls in an active mining area where it is impractical to establish a permanent monument.</p> <p>From this point, the true point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, hereinbefore described, bears S. 89°58'50" E., 3.652 chs. dist.</p> <hr/> <p>N. 89°58'50" W., on line 4-5, Tract 37, identical with a portion of the line bet. secs. 15 and 22.</p> <p>Over active mining area.</p>
6.078	<p>Point for Angle Pt. No. 5, Tract 37. Point falls in a active mining area where it is impractical to establish a permanent monument.</p> <hr/> <p>S. 0°05'40" E., on line 5-6, Tract 37.</p> <p>Over active mining area.</p>
8.147	<p>Point for Angle Pt. No. 6, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>




METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;">  <p>T12S AP 6 R46E TR 37 S22</p> <p>1998</p> </div>
	<p>S. 49°30'30" W., on line 6-7, Tract 37.</p> <p>Over active mining area.</p>
12.970	<p>Point for Angle Pt. No. 7, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  <p>T12S AP 7 R46E TR 37 S22</p> <p>1998</p> </div>
	<p>S. 45°20'40" E., on line 7-8, Tract 37.</p> <p>Over nearly level terrain.</p>
13.461	<p>Point selected for a witness point on line 7-8, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  <p>WP</p> <p>T12S TR 37 R46E S22</p> <p>1998</p> </div>
15.017	<p>Point for Angle Pt. No. 8, Tract 37, on the center line of Nevada State Highway No. 374.</p> <p>Set PK nail flush with the asphalt surface.</p> <p>From this point, the point for Sta. 519+57.70 POT, Nevada State Highway No. 374, hereinbefore described, bears N. 45°53'20" E., 84.000 chs. dist.</p>
	<p>S. 45°53'20" W., on line 8-9, Tract 37, identical with a portion of the center line of Nevada State Highway No. 374.</p> <p>Along asphalt surfaced road, 48 lks. wide.</p>
32.902	<p>Point for Angle Pt. No. 9, Tract 37, on the center line of Nevada State Highway No. 374.</p>



METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS										
	<p>Set PK nail flush with the asphalt surface.</p> <p>From this point, the point for Sta. 369+89.27 POT, Nevada State Highway No. 374, hereinbefore described, bears S. 45°53'20" W., 109.906 chs.</p> <hr/>									
	<p>S. 0°10'50" E., on line 9-10, Tract 37.</p>									
	<p>Over nearly level terrain.</p>									
4.949	<p>Point selected for a witness point on line 9-10, Tract 37.</p>									
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>									
	<p style="text-align: center;">WP</p>									
	<p style="text-align: center;"> <table style="margin: auto;"> <tr> <td style="text-align: center;">T12S</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td style="text-align: center;">TR 37</td> </tr> <tr> <td style="text-align: center;">R46E</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td></td> </tr> <tr> <td style="text-align: center;">S22</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td></td> </tr> </table> </p>	T12S		TR 37	R46E			S22		
T12S		TR 37								
R46E										
S22										
	<p style="text-align: center;">1998</p>									
	<p>Cor. is located at the intersection of fences bearing N. 45° E., S. 45° W. and S.</p>									
	<p>Over nearly level terrain, along wire fence.</p>									
24.656	<p>Point for Angle Pt. No. 10, Tract 37.</p>									
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>									
	<p style="text-align: center;"> <table style="margin: auto;"> <tr> <td style="text-align: center;">T12S</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td style="text-align: center;">AP 10</td> </tr> <tr> <td style="text-align: center;">R46E</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td></td> </tr> <tr> <td style="text-align: center;">S22</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;"> </td> <td style="text-align: center;">TR 37</td> </tr> </table> </p>	T12S		AP 10	R46E			S22		TR 37
T12S		AP 10								
R46E										
S22		TR 37								
	<p style="text-align: center;">1998</p>									
	<p>Cor. is located at the intersection of fences bearing N. and S. 38° E.</p>									
	<hr/>									
	<p>S. 38°07'00" E., on line 10-11, Tract 37.</p>									
	<p>Over nearly level terrain, along wire fence.</p>									
6.829	<p>Intersect the line bet. secs. 22 and 27, at a point from which the cor. of secs. 21, 22, 27 and 28, hereinbefore described, bears N. 89°53'50" W., 11.695 chs. dist.</p>									
32.330	<p>Point for Angle Pt. No. 11, Tract 37.</p>									
	<p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>									



METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;">  </div> <p style="text-align: center;">1998</p> <p>Cor. is located at the intersection of fences bearing N. 38° W. and S. 27° E.</p>
	<hr/> <p>S. 27°27'50" E., on line 11-12, Tract 37.</p> <p>Over nearly level terrain, along wire fence.</p>
18.928	<p>Point for Angle Pt. No. 12, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1998</p> <p>Cor. is located at the intersection of fences bearing N. 27° W. and N. 59° E.</p>
	<hr/> <p>N. 58°45'20" E., on line 12-13, Tract 37.</p> <p>Over nearly level terrain, along wire fence.</p>
44.00	<p>Intersection of fences bearing NW. and SW.</p> <p>Over nearly level terrain.</p>
47.208	<p>Point for Angle Pt. No. 13, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">1998</p> <p>Cor. is located at the extension of fences bearing N. 37° W. and S. 59° W.</p>
4.25	<hr/> <p>N. 37°16'20" W., on line 13-14, Tract 37.</p> <p>Over nearly level terrain.</p> <p>Intersection of fences bearing NW. and SW.</p>

METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
11.991	<p>Over nearly level terrain, along wire fence.</p> <p>Point for Angle Pt. No. 14, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  <p>AP 14 TR 37</p> <p>T12S R46E S27</p> </div> <p style="text-align: center;">1998</p> <p>Cor. is located at the intersection of fences bearing N. 46° E. and S. 37° E.</p>
	<hr/> <p>N. 46°22'10" E., on line 14-15, Tract 37.</p>
	<p>Over nearly level terrain, along wire fence.</p>
3.944	<p>Intersect the line bet. secs. 22 and 27, at a point from which the cor. of secs. 22, 23, 26 and 27, hereinbefore described, bears S. 89°53'50" E., 7.865 chs. dist.</p>
14.803	<p>Point for Angle Pt. No. 15, on the line bet. secs. 22 and 23, at a point from which the cor. of secs. 22, 23, 26 and 27, hereinbefore described, bears S. 0°02'20" E., 7.508 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">  <p>AP 15 TR 37</p> <p>T12S R46E S23</p> </div> <p style="text-align: center;">1998</p>
	<hr/> <p>N. 0°02'20" W., on line 15-16, Tract 37, identical with a portion of the line bet. secs. 22 and 23.</p>
	<p>Over nearly level terrain.</p>
2.510	<p>Angle Point No. 16, identical with the S-S ¹/₆₄ sec. cor. of secs. 22 and 23, hereinbefore described.</p>
	<hr/> <p>N. 46°22'10" E., on line 16-17, Tract 37.</p>
	<p>Over nearly level terrain.</p>
12.604	<p>Point for Angle Pt. No. 17, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2¹/₂ ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

METES-AND-BOUNDS SURVEY OF TRACT 37,
T. 12 S., R. 46 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;">  <p>1998</p> </div> <p>Cor. is located in fences bearing N. 44° W. and S. 44° E.</p>
	<p>N. 43°42'50" W., on line 17-18, Tract 37.</p> <p>Over nearly level terrain, along wire fence.</p>
13.213	<p>Intersect the line bet. secs. 22 and 23, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, hereinbefore described, bears N. 0°02'20" W., 11.802 chs. dist.</p>
60.023	<p>Point selected for a witness point on line 17-18, Tract 37.</p> <p>Set a stainless steel post, 28 ins. long, 2$\frac{1}{2}$ ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP</p>  <p>1998</p> </div>
65.062	<p>Cor. is located at the intersection of fences bearing S. 46° W. and S. 44° E.</p> <p>Continue on line 17-18, Tract 37 over nearly level terrain.</p> <p>Point for Angle Pt. No. 18, Tract 37, on the center line of Nevada State Highway No. 374.</p> <p>Set PK nail flush with the asphalt surface.</p> <p>From this point, the point for Sta. 369+89.27 POT, Nevada State Highway No. 374, hereinbefore described, bears S. 45°53'20" W., 161.048 chs.</p>
20.719	<p>N. 45°53'20" E., on line 18-1, Tract 37, identical with a portion of the center line of Nevada State Highway No. 374.</p> <p>Along asphalt surfaced road, 48 lks. wide.</p> <p>Intersect the line bet. secs. 15 and 22, at a point from which the cor. of secs. 14, 15, 22 and 23, hereinbefore described, bears S. 89°58'50" E., 20.939 chs. dist.</p>
24.231	<p>The true point for Angle Pt. No. 1, Tract 37, on the center line of Nevada State Highway No. 374, and the point of beginning.</p>

TOWNSHIP 12 SOUTH, RANGE 46 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	GENERAL DESCRIPTION
	<p>The area surveyed and resurveyed with Township 12 South, Range 46 East, varies from nearly level to mountainous. The elevation ranges from about 3,150 to 4,800 feet above sea level. The soil is sandy clay loam and gravel and rock outcrops. The vegetation consists of sagebrush and native grasses.</p> <p>Access is by Nevada State Highway No. 374, asphalt and gravel surfaced roads and trail roads throughout the vicinity.</p> <p>The Townsite of Rhyolite, an abandoned mining community, is situated in secs. 9 and 16. Numerous remains of buildings, including a glass house and the railroad depot, attract tourism in the area.</p>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Clay W. Morrow Surveying Technician
Dylan S. Hansen Survey Aid
Wenn Hickinbothou Mining Surveyor
Leslie Thompson Mining Survey Technician

CERTIFICATE OF SURVEY

I, Thomas E. Casinger, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 23rd day of July, 1998, I have dependently resurveyed a portion of the subdivisional lines and portions of certain mineral surveys, subdivided section 9, and executed metes-and-bounds surveys of a portion of Nevada State Highway No. 374 and Tract 37, Township 12 South, Range 46 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

09/14/2000
(Date)

Thomas E. Casinger
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and portions of certain mineral surveys, and the subdivision of section 9, and the metes-and-bounds surveys of a portion of Nevada State Highway No. 374 and Tract 37, Township 12 South, Range 46 East, Mount Diablo Meridian, Nevada, executed by Thomas E. Casinger, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

9/22/2000
(Date)

Mary J. M. Hartzel
(Acting Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 12 S., R. 46 E., M.D.M., Nevada, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Acting Chief Cadastral Surveyor, Nevada)~~