

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES,
THE SUBDIVISION OF SECTION 8,
AND A METES-AND-BOUNDS SURVEY IN SECTION 8,
TOWNSHIP 14 NORTH, RANGE 20 EAST,
OF THE MOUNT DIABLO MERIDIAN,
IN THE STATE OF NEVADA

EXECUTED BY

Michael E. Swope, Cadastral Surveyor

Under Special Instructions dated November 22, 2010,
and approved November 22, 2010,
which provided for the surveys included under Group No. 903,
and Assignment Instructions dated November 22, 2010.

Survey commenced November 23, 2010

Survey completed April 27, 2011

INDEX DIAGRAM

TOWNSHIP 14 NORTH, RANGE 20 EAST, MOUNT DIABLO MERIDIAN, NEVADA

6	5 6	4	3	2	1
7	4 8 3	9 2	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of Section 8pp. 7 - 12
 Metes-and-Bounds Survey in Section 8p. 12

TOWNSHIP 14 NORTH, RANGE 20 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, the subdivision of section 8 and a metes-and-bounds survey in section 8, Township 14 North, Range 20 East, Mount Diablo Meridian, Nevada.

A portion of the subdivisional lines were surveyed by U.S. Deputy Surveyor B. Ives in 1865 under Contract "F". Portions of the north and west boundaries and a portion of the subdivisional lines were dependently resurveyed and sections 5, 6 and 7 were subdivided by Cadastral Surveyor D.A. Cannon in 1963 under Group No. 406. Portions of the north and west boundaries and a portion of the subdivisional lines were dependently resurveyed, certain sections were subdivided and Parcel "A" in section 5,

T. 14 N., R. 20 E. was surveyed by Cadastral Surveyor R.E. Williams in 1985 under Group No. 624. A portion of the subdivisional lines and a portion of the subdivision-of-section lines within sections 6 and 18 were dependently resurveyed by Cadastral Surveyor D.R. Aschenbach in 2005-07 under Group No. 823. Other surveys remote to the area of this survey are not included in this history.

Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions (2009) and the Special Instructions for Group No. 903, Nevada dated November 22, 2010.

Measurements were made with Trimble R8 Global Positioning System (GPS) receivers using the real-time kinematic (RTK) method and refer to the true meridian based on geodetic methods. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.

The NAD 83 (CORS96) epoch 2002 geographic positions of the corners below were determined from GPS static observations processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuous Operating Reference Stations (CORS) DOT1 CARSON CITY COOP CORS ARP, ZOLE ZOLEZZI COOP CORS ARP, and SPKS SPARKS COOP CORS ARP, and carried forward by RTK observations.

The corner of sections 8, 9, 16 and 17 is as follows:

Latitude: 39°05'05.935" N. Longitude: 119°45'06.883" W.

The corner of sections 5, 6, 7 and 8 is as follows:

Latitude: 39°05'58.232" N. Longitude: 119°46'14.125" W.

TOWNSHIP 14 NORTH, RANGE 20 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>The 1994 mean magnetic declination is 15 1/2° E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "GENOA, NV" dated 1994.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor B. Ives in 1865, and a Portion of the Dependent Resurvey Executed by Cadastral Surveyor D.A. Cannon in 1963</p> <hr/> <p>Beginning at the cor. of secs. 8, 9, 16 and 17, determined by person(s) unknown, monumented with an iron pipe, 3 ins. diam., 4 ft. long, firmly set, projecting 16 ins. above the ground. This position has been adopted by adjacent landowners and professional land surveyors and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">T14N</td> <td style="padding: 0 10px;">R20E</td> </tr> <tr> <td style="padding: 0 10px; border-right: 1px solid black;">S 8</td> <td style="padding: 0 10px;">S 9</td> </tr> <tr> <td style="padding: 0 10px; border-right: 1px solid black;">S17</td> <td style="padding: 0 10px;">S16</td> </tr> </table> <p style="text-align: center;">2011</p> <p>Bury iron pipe alongside stainless steel post.</p> <p>Cor. is located in the remains of a barbed wire fence, bears E. and W.</p> <p>From this cor., an iron pipe of unknown origin, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, bears N. 53°33' E., 0.41 chs. dist.</p> <p>N. 0°01'20" W., bet. secs. 8 and 9.</p> <p>Over nearly level bottom land, through scattered sagebrush and tule patches.</p> <p>9.40 Right bank of the Carson River, bears N. 85° E. and S. 85° W., thence across main channel, course N. 85° E.</p> <p>12.70 Left bank of the Carson River, bears N. 85° E. and S. 85° W., leave river.</p>	T14N	R20E	S 8	S 9	S17	S16
T14N	R20E						
S 8	S 9						
S17	S16						

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.163	<p>The 1/4 sec. cor. of secs. 8 and 9, determined by Charles D. Church, Nevada Professional Land Surveyor No. 6886, in 1993, monumented with an aluminum cap, 3 1/4 ins. diam., encased in concrete, firmly set flush with the surface of the ground, mkd. N.N.C.C BOUNDARY T14N R20E S8 S9 1/4 C.E.S 1993 P.L.S 6886, as recorded in Douglas County, Nevada, Record of Survey, Document No. 320490. This is accepted as a careful and faithful determination of the position of the original corner.</p> <p>From this cor., the cor. of secs. 4, 5, 8 and 9, bears N. 0°01'10" W., 40.163 chs. dist., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 14 N., R. 20 E., executed under Group No. 406.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 89°57'00" W., bet. secs. 8 and 17.</p> <p>Over nearly level bottom land, through scattered sagebrush and tule patches.</p>
7.60	<p>Right bank of the Carson River, bears N. 30° E. and S. 30° W., thence across main channel, course N. 30° E.</p>
10.40	<p>Left Bank of the Carson River, bears N. 30° E. and S. 30° W., leave river.</p>
36.80	<p>Slough, 100 lks. wide, 20 ft. deep, course irregularly NE.</p>
40.182	<p>The 1/4 sec. cor. of secs. 8 and 17, determined by person(s) unknown, monumented with an iron post, 3x2 ins., firmly set, 2 1/2 ft. long, projecting 18 ins. above the ground, as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 14 N., R. 20 E., executed under Group No. 823.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T14N R20E S 8 1/4 — S17</p>
	<p style="text-align: center;">2011</p>
	<p>Bury iron post alongside stainless steel post.</p>
	<p>Cor. is located at the cor. of barbed wire fences, extending N. and W.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	S. 89°57'50" W., beginning new measurement.
10.05	Cor. of barbed wire fences, extending N. and E.
10.055	A position determined by Donald A. Dick, Nevada Professional Land Surveyor No. 8659, in 1999, monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, as recorded in Douglas County, Nevada, Book 699 of Official Records, at Page 6706, Document No. 471564. Not utilized in the course of this survey.
22.90	Long Drive, asphalt surfaced, 45 lks. wide, bears NE. and SW.
39.15	South Sunridge Drive, asphalt surfaced, 45 lks. wide, bears N. and S.
40.163	The cor. of secs. 7, 8, 17 and 18, determined at intersection of the record distances from the 2007 reference monuments, falls in lawn area where the landowner requested no permanent monument be established, from which the 2007 reference monuments A brass tablet, 3 1/4 ins. diam., encased in concrete, set flush with surface of a concrete curb, mkd. RM T14N R20E S8 55.0 FT TO COR 2007 and an arrow pointing to the cor., bears N. 64°58' E., 83.3 lks. dist. A brass tablet, 3 1/4 ins. diam., encased in concrete, set flush with surface of a concrete curb, mkd. RM T14N R20E S17 55.0 FT TO COR 2007 and an arrow pointing to the cor., bears S. 27°47' E., 83.3 lks. dist.
	N. 0°01'00" W., bet. secs. 7 and 8. Over developed urban lands.
20.042	Point for the S 1/16 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the 1963 monument. POINT NOT MONUMENTED
40.084	Point for the 1/4 sec. cor. of secs. 7 and 8, determined by irregular boundary adjustment method; there is no remaining evidence of the 1963 monument. Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, flush with surface of a concrete gutter, encased in concrete, with top mkd. T14N R20E 1/4 S 7 S 8 2011
	N. 0°01'00" E., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
20.051	<p>The N 1/16 sec. cor. of secs. 7 and 8, monumented with iron post, 2 1/2 ins. diam., firmly set 24 ins. below the surface of the ground, in telephone utility box, top of brass cap flush with base of box and mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 14 N., R. 20 E., executed under Group No. 406.</p>
	<p>N. 0°00'20" W., beginning new measurement.</p>
	<p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
10.022	<p>The N-N 1/64 sec. cor. of secs. 7 and 8, determined by John A. Modawell, Nevada Professional Land Surveyor No. 1462, monumented with an unrecorded copper coated steel stake, 1 in. diam., 18 ins. long, firmly set flush with ground, encased in concrete, with top mkd. RLS 1462, with a steel fence post, 4 ft. long, set alongside. This is accepted as a careful and faithful determination of the position of the corner.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">N-N 1/64 S 7 S 8 2011</p>
	<p>Insert copper coated steel stake inside stainless steel post.</p>
	<p>N. 0°00'20" W., beginning new measurement.</p>
10.022	<p>Point for the cor. of secs. 5, 6, 7 and 8, determined latitudinally at proportionate distance based on the measurements bet. the cor. of secs. 5, 6, 7 and 8 and the 1/4 sec. cor. of secs. 5 and 6, as shown on the plat by Thomas I. McManus, Nevada Professional Land Surveyor No. 6899, recorded in Douglas County, Nevada, Book 0705 of Official Records, at Page 13633, Document No. 650789 and the measurements bet. the cor. of secs. 5, 6, 7 and 8 and the cor. of secs. 7, 8, 17 and 18, as shown on the plat of the 2007 dependent resurvey of T. 14 N., R. 20 E., executed under Group No. 823, and longitudinally at proportionate distance based on the measurement bet. the W-E-W-W 1/1024 sec. cor. of secs. 5 and 8 and the cor. of secs. 5, 6, 7 and 8, as shown on said Document No. 650789, and the measurement bet. the 1/4 sec. cor. of secs. 6 and 7 and the cor. of secs. 5, 6, 7 and 8, as shown on the plat of the 1963 dependent resurvey of T. 14 N., R. 20 E., executed under Group No. 406.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">T14N R20E S 6 S 5 <hr style="width: 50%; margin: auto;"/>S 7 S 8</p> <p style="text-align: center;">2011</p> <p>From this point, the 1/4 sec. cor. of secs. 6 and 7, bears S. 89°38'20" W., 39.981 chs. dist., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 14 N., R. 20 E., executed under Group No. 406. The control line was fully retraced, and no evidence of intervening cors. was found.</p> <p>From this same point, the 1/4 sec. cor. of secs. 5 and 6, bears N. 0°16'10" E., 40.155 chs. dist., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 14 N., R. 20 E., executed under Group No. 406. The control line was fully retraced, and no evidence of intervening cors. was found.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 5 and 8, determined by person(s) unknown, monumented with an iron post, 1 1/2 ins. diam., 3 1/2 ft. long, firmly set, projecting 24 ins. above the ground, recovered by Thomas I. McManus, Nevada Professional Land Surveyor No. 6899, as recorded in Douglas County, Nevada, Record Book 0705 of Official Records, at Page 13633, Document No. 650789, alongside of which is an unrecorded rebar, 5/8 in. diam., firmly set, projecting 8 ins. above the ground, with plastic cap mkd. PLS 5286 HADDEN. This position has been adopted by adjacent landowners and professional land surveyors and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T14N R20E S 5 1/4 <hr style="width: 50%; margin: auto;"/>S 8</p> <p style="text-align: center;">2011</p> <p>Reset iron post alongside stainless steel post.</p> <p>Cor. is located at the cor. of fences, extending S. and E.</p> <p>S. 89°54'50" W., bet. secs. 5 and 8.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
<p>20.092</p>	<p>Point for the W 1/16 sec. cor. of secs. 5 and 8, at proportionate distance based on the survey by Thomas I. McManus, Nevada Professional Land Surveyor No. 6889, as recorded in Douglas County, Nevada, Book 0705 of Official Records, at Page 13633, Document No. 650789; there is no remaining evidence of the 1963 corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 5 W 1/16 — S 8</p> <p>2011</p> </div>
<p>26.47</p>	<p>North Sunridge Drive, asphalt surfaced, 45 lks. wide, bears N. and S.</p>
<p>27.641</p>	<p>The W-E-W-W 1/1024 sec. cor. of secs. 5 and 8, determined by Thomas I. McManus, Nevada Professional Land Surveyor No. 6899, in 2005, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set flush with ground, with yellow plastic cap mkd. PLS 6899, as recorded in Douglas County, Nevada, Book 0705 of Official Records, at Page 13633, Document No. 650789, and is accepted as a careful and determination of the position of the corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>1 — 1024</p> <p>2011</p> </div> <p>Insert rebar inside stainless steel post.</p> <hr/> <p>S. 89°55'50" W., beginning new measurement.</p>
<p>12.581</p>	<p>The cor. of secs. 5, 6, 7 and 8.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 8, T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 8 and 17.</p> <p>N. 0°02'30" E., on the N-S center line of sec. 8.</p>

SUBDIVISION OF SECTION 8,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Over nearly level bottom land, through scattered sagebrush and tule patches.
30.06	Cor. of barbed wire fences, extending S. and E.
40.094	Point for the center 1/4 sec. cor. of sec. 8, at intersection with E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T14N R20E C 1/4 S 8 2011
42.10	Enter golf course, edge bears NE. and SW.
50.10	Exit golf course, edge bears NE. and SW.
52.60	Long Drive, 45 lks. wide, bears NE. and SW.
56.70	Spy Glass Circle, 45 lks. wide, asphalt surfaced, bears NW. and SE.
60.152	Point for the C-N 1/16 sec. cor. of sec. 8. POINT NOT MONUMENTED
70.181	The C-N-N 1/64 sec. cor. of sec. 6, determined by Ernest E. Muller, Sr., Nevada Professional Land Surveyor No. 827, in 1985, monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. RLS 827, as recorded in Douglas County, Nevada, Book 686 of Official Records, at Page 132, Document No. 135681. This is accepted as a careful and faithful determination of the position of the corner. _____
	N. 0°02'30" E., beginning new measurement.
10.029	The 1/4 sec. cor. of secs. 5 and 8. _____
	From the 1/4 sec. cor. of secs. 8 and 9. S. 89°57'00" W., on the E-W center line of sec. 8. Over nearly level bottom land, through scattered sagebrush and tule patches.
2.74	From this point, the cor. post of barbed wire fences, extending N., S. and W., bears N., 11 lks. dist.
7.30	Service power line, 11 wire, bears N. and S.
30.09	Cor. of barbed wire fences, extending E. and S.

SUBDIVISION OF SECTION 8,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.133	The center 1/4 sec. cor. of sec. 8.
42.10	Enter golf course, edge bears NE. and SW.
47.80	Exit golf course, edge bears NE. and SW.
50.20	Long Drive, asphalt surface, 45 lks. wide, bears NE. and SW.
52.60	Enter golf course, edge bears NE. and SW.
60.233	Point for the C-W 1/16 sec. cor. of sec. 8. POINT NOT MONUMENTED
70.05	Leave golf course, continue across a developed subdivision, edge bears NE. and SW.
80.333	The 1/4 sec. cor. of secs. 7 and 8. <hr/>
	From the point for the C-W 1/16 sec. cor. of sec. 8. N. 0°03'00" E., on the N-S center line of the NW1/4 of sec. 8. Over nearly level land, covered with scattered sagebrush and grasses.
20.055	Point for the NW 1/16 sec. cor. of sec. 8, at intersection the E-W center line of the NW1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd. NW 1/16 S 8 2011
22.561	Point for a 1/1024 sec. cor. on the N-S center line of NW1/4 of sec. 8. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. 1/1024 2011
25.067	Point for the C-S-N-NW 1/256 sec. cor. of sec. 8. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

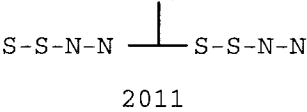
SUBDIVISION OF SECTION 8,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">S 8 C-S-N-NW 1/256</p>
	<p style="text-align: center;">2011</p>
40.103	<p>The W 1/16 sec. cor. of secs. 5 and 8.</p> <hr/>
	<p>From the point for the C-N 1/16 sec. cor. of sec. 8. S. 89°56'20" W., on E-W center line of the NW1/4 of sec. 8. Over nearly level land, covered with scattered sagebrush and grasses.</p>
20.096	<p>The NW 1/16 sec. cor. of sec. 8.</p>
25.124	<p>Point for the C-E-W-NW 1/256 sec. cor. of sec. 8.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 8 C-E-W-NW 1/256</p>
	<p style="text-align: center;">2011</p>
	<p>Cor. is located 9 lks. N. of a wooden fence line, bears E. and W.</p>
	<p>From this point, a position established by Thomas I. McManus, Nevada Professional Land Surveyor No. 6899, in 2005, monumented with a rebar, 5/8 in. diam., firmly set, flush with ground, with a plastic cap mkd. PLS 6899, as recorded in Douglas County, Nevada, Book 0705 of Official Records, at Page 13633, Document No. 650789, bears N. 5°01'30" W., 0.008 chs. dist. This position was determined without utilizing existing control at the N 1/16 sec. cor. of secs. 7 and 8 and is not utilized during the course of this survey.</p>
26.385	<p>A position determined by person(s) unknown, on the center line of North Sunridge Drive, monumented with a rebar, 5/8 in. diam., firmly set 3 ins. below the asphalt surface, in a monument box, recovered by Thomas I. McManus, Nevada Professional Land Surveyor No. 6899, as recorded in Douglas County, Nevada, Book 0705 of Official Records, at Page 13633, Document No. 650789.</p>
	<p>Monument is located in North Sunridge Drive, asphalt surfaced, 45 lks. wide, bears N. and S.</p>
40.208	<p>The N 1/16 sec. cor. of secs. 7 and 8.</p> <hr/>
	<p>From the C-E-W-NW 1/256 sec. cor. of sec. 8. N. 0°02'10" E., on a portion of the computed N-S center line of the SE1/4NW1/4NW1/4 of sec. 8.</p>

SUBDIVISION OF SECTION 8,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
2.506	<p>Point for a 1/1024 sec. cor.</p> <p>POINT NOT MONUMENTED</p>
5.012	<p>Point for the SE-NW-NW 1/256 sec. cor. of sec. 8, at its computed position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">S 8 SE-NW-NW 1/256 2011</p> <hr/> <p>N. 89°56'10" E., on a portion of the computed E-W center line of the SE1/4NW1/4NW1/4 of sec. 8.</p> <p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
1.644	<p>Point for Angle Point No. 2, sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T14N R20E S 8 AP 2 S-N-N — S-N-N 2011</p>
5.029	<p>The C-S-N-NW 1/256 sec. cor. of sec. 8.</p> <hr/>
	<p>From the 1/1024 sec. cor. on the N-S center line of NW1/4 of sec. 8.</p>
	<p>S. 89°56'10" W., on the E-W center line of the SE1/4SE1/4NW1/4NW1/4 of sec. 8.</p>
	<p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
3.385	<p>Point for Angle Point No. 1, sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

SUBDIVISION OF SECTION 8,
T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T14N R20E S 8 AP 1</p>  <p>2011</p>
5.028	<p>The point for the 1/1024 sec. cor. on the N-S center line of the SE1/4NW1/4NW1/4 of sec. 8.</p> <hr/> <p style="text-align: center;">METES-AND-BOUNDS SURVEY IN SECTION 8, T. 14 N., R. 20 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From Angle Point No. 1, sec. 8, on the E-W center line of the SE1/4SE1/4NW1/4NW1/4, hereinbefore described.</p> <p>N. 0°03'00" E., on line 1-2.</p> <p>Over nearly level land, covered with scattered sagebrush and grasses.</p>
2.506	<p>Angle Point No. 2, sec. 8, on the E-W center line of the SE1/4NW1/4NW1/4, hereinbefore described.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The lands contained within the scope of this survey are generally rolling, at an average elevation of about 4700 ft. above sea level. The vegetation in the undeveloped areas is generally sagebrush and grasses, except in the bottom lands formed by the Carson River, located in the SE1/4 of section 8, where tule patches and willow are included in the vegetation. The W1/2 of section 8 is primarily developed residential neighborhoods.</p> <p>Access is provided by numerous paved and dirt roads by way of U.S. Highway No. 395.</p> <p>The use of the land varies from residential in the W1/2 and pastures for grazing in the E1/2 of section 8.</p> <p>No mineral formations of any consequence were noted during the course of this survey.</p> <hr/>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Michael O. Harmening	Cadastral Surveyor
Michael C. Lambeth	Surveying Technician
Brandon K. Grace	Survey Aid

CERTIFICATE OF SURVEY

I, Michael E. Swope, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing the date of the 22nd day of November, 2010, I have dependently resurveyed a portion of the subdivisional lines, subdivided section 8, and executed a metes-and-bounds survey in section 8, Township 14 North, Range 20 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Surveying Instructions, and in the specific manner described in the foregoing field notes.

May 25, 2011
Date

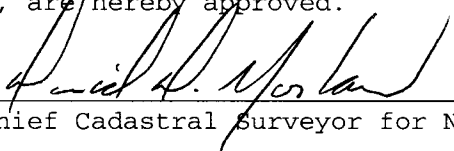

Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, the subdivision of section 8, and a metes-and-bounds survey in section 8, Township 14 North, Range 20 East, of the Mount Diablo Meridian, Nevada, executed by Michael E. Swope, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

May 27, 2011
Date


Chief Cadastral Surveyor for Nevada

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in Township 14 North, Range 20 East, Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~_____~~
~~Date~~

~~_____~~
~~Chief Cadastral Surveyor for Nevada~~