

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE FIFTH STANDARD PARALLEL SOUTH, THROUGH A PORTION OF RANGE 54 EAST,

AND

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTION 2,

TOWNSHIP 21 SOUTH, RANGE 54 EAST,

OF THE MOUNT DIABLO MERIDIAN,

IN THE STATE OF NEVADA

EXECUTED BY

Richard A. Zaninovich, Cadastral Surveyor

Clay W. Morrow, Surveying Technician

Under Special Instructions dated April 9, 2001, and approved April 9, 2001,

and Supplemental Special Instructions dated May 18, 2001,

and approved May 18, 2001,

which provided for the surveys included under Group No. 799,

and Assignment Instructions dated April 9, 2001.

Survey commenced April 9, 2001

Survey completed July 13, 2006

## INDEX DIAGRAM

TOWNSHIP 21 SOUTH, RANGE 54 EAST, MOUNT DIABLO MERIDIAN, NEVADA

				3	2
6	5	4	3	6 2	4 1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of Section 2 . . . . . pp. 9 - 12.

## TOWNSHIP 21 SOUTH, RANGE 54 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>The following field notes are those of the dependent resurvey of the Fifth Standard Parallel South, through a portion of Range 54 East, and a portion of the subdivisional lines, and the subdivision of section 2, Township 21 South, Range 54 East, Mount Diablo Meridian, Nevada.</p> <p>The north boundary (Fifth Standard Parallel South) was surveyed by U.S. Deputy Surveyor T. Binge in 1881 under Contract No. 114. The subdivisional lines were surveyed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881 under Contract No. 127. Other official surveys remote to this area are not included.</p> <p>Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners and other calls of the original field note record.</p> <p>The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.</p> <p>The survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions, 1973</u>, the Special Instructions for Group No. 799, dated April 9, 2001, and the Supplemental Special Instructions dated May 18, 2001.</p> <p>Measurements were made with Trimble 4000 Global Positioning System (GPS) receivers using the real-time kinematic method and refer to the true meridian based on geodetic methods. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.</p> <p>The NAD 1983 geographic position, of the standard corner of sections 34 and 35, T. 20 S., R. 54 E., as determined by a tie to U.S. Geological Survey Benchmark "2 HJH 1956", is as follows:</p> <p>Latitude: 36°09'39.70" N. Longitude: 115°53'14.40" W.</p> <p>The 1980 magnetic declination is 14°30' E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "PAHRUMP, NEV.", provisional edition dated 1984.</p> <hr/>
--------	--

DEPENDENT RESURVEY OF THE FIFTH STANDARD PARALLEL SOUTH,  
THROUGH A PORTION OF RANGE 54 EAST,  
MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by T. Binge in 1881</p> <hr/>
	<p>Beginning at the standard cor. of Tps. 20 S., Rs. 54 and 55 E., monumented with a limestone, 12x10x10 ins., set in a mound of stone, mkd. with 6 notches on the N., E., and W. edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">           SC            T20S            R54E   R55E            S36   S31  <hr style="width: 50%; margin: auto;"/> </div> <p style="text-align: center;">2001</p> <p>Bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone N. of the corner.</p> <p>N. 89°50'00" W., on the S. bdy. of sec. 36.</p>
40.550	<p>Point for the standard 1/4 sec. cor. of sec. 36, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;">           SC            T20S R54E            1/4 S36  <hr style="width: 50%; margin: auto;"/> </div> <p style="text-align: center;">2001</p> <p>Raise a mound of stone N. of the corner.</p>
78.657	<p>The closing cor. of secs. 1 and 2, T. 21 S., R. 54 E., hereinafter described.</p>
81.100	<p>The standard cor. of secs. 35 and 36, monumented with a limestone, 14x10x7 ins., set in a mound of stone, mkd. with 6 notches on the N., 1 notch on the E., and 5 notches on the W. edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE FIFTH STANDARD PARALLEL SOUTH,  
THROUGH A PORTION OF RANGE 54 EAST,  
MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">SC T20S R54E <u>S35   S36</u></p> <p style="text-align: center;">2001</p> <p>Bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone N. of the corner.</p> <hr/>
	<p>N. 89°52'30" W., on the S. bdy. of sec. 35.</p>
36.937	Point for the 1/4 sec. cor. of sec. 2 only, T. 21 S., R. 54 E., hereinafter described.
39.395	Point for the standard 1/4 sec. cor. of sec. 35, at proportionate dist.; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">SC T20S R54E <u>1/4 S35</u></p> <p style="text-align: center;">2001</p>
56.627	Point for the W 1/16 sec. cor. of sec. 2 only, T. 21 S., R. 54 E., hereinafter described.
61.00	Power transmission line, bears NW-SE.
76.317	Point for the closing cor. of secs. 2 and 3, T. 21 S., R. 54 E., hereinafter described.
78.790	The standard cor. of secs. 34 and 35, monumented with an unrecorded rebar, 5/8 in. diam., with aluminum cap mkd. RL HAFEN PLS 4428, set in a mound of stone, alongside of which is a limestone, 12x10x6 ins. mkd. with 6 notches on the N., 2 notches on the E., and 4 notches on the W. edges, and is accepted as a careful and faithful perpetuation of the position of the original corner.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.

DEPENDENT RESURVEY OF THE FIFTH STANDARD PARALLEL SOUTH,  
THROUGH A PORTION OF RANGE 54 EAST,  
MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">SC T20S R54E <u>S34   S35</u></p> <p style="text-align: center;">2001</p> <p>Deposit the rebar inside and bury the mkd. stone alongside the stainless steel post.</p> <p>From this corner, U.S. Geological Survey Benchmark "2 HJH 1956", monumented with a concrete post, 6x6 ins., bears N. 23°14'20" W., 403.067 chs. dist.; the brass tablet has been removed from the top of the concrete post.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by J.M. Brunt and W.H. Proctor in 1881</p> <hr/> <p>From the cor. of secs. 1, 2, 11 and 12, perpetuated by Russell Avery, Nevada Professional Land Surveyor No. 2002, in 1973, monumented with a rebar, 1/2 in. diam., with plastic cap mkd. RE 2002, set in a mound of stone, alongside of which is a limestone, 16x10x8 ins., mkd. with 5 notches on the S. and 1 notch on the E. edges. as shown on Record of Survey File No. 27, Page No. 3, on file in the office of the Clark County recorder and is accepted as a careful and faithful perpetuation of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T21S R54E <u>S 2   S 1</u> S11   S12</p> <p style="text-align: center;">2001</p> <p>Deposit the rebar inside and bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone W. of the corner.</p> <p>N. 0°50'20" W., bet. secs. 1 and 2.</p>
--------	--

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.318	<p>The 1/4 sec. cor. of secs. 1 and 2, monumented with an unrecorded rebar, 5/8 in. diam., set in a collar of stone, alongside of which is a limestone, 16x10x8 ins., mkd. 1/4 on the W. face, and is accepted as a careful and faithful perpetuation of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R54E 1/4 S 2   S 1</p> <p>2001</p> </div> <p>Deposit the rebar inside and bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone W. of the corner.</p> <hr style="width: 30%; margin-left: 0;"/> <p>N. 0°15'00" W., beginning new measurement.</p>
13.70	Power transmission line, bears NW-SE.
40.655	<p>Intersect the Fifth Standard Parallel South.</p> <p>The closing cor. of secs. 1 and 2, monumented with a limestone, 12x8x6 ins., in a collar of stone, mkd. with 6 notches on the S., 1 notch the E., and 5 notches on the W. edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20S R54E S36 S 2   S 1 T21S R54E CC</p> <p>2001</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone S. of the corner.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

From this corner, the standard cor. of secs. 35 and 36, T. 20 S., R. 54 E., bears N. 89°50'00" W., 2.443 chs. dist., hereinbefore described.

From the 1/4 sec. cor. of secs. 2 and 3, perpetuated by Kay L. Adams, Nevada Professional Land Surveyor No. 2050, in 1973, monumented with a rebar, 5/8 in. diam., with aluminum cap mkd. VTN ENGR CO RLS 2050, set in a mound of stone, alongside of which is a limestone, 10x8x6 ins., mkd. 1/4 on the W. face, as shown on Record of Survey File No. 26, Page No. 29, on file in the office of the Clark County recorder and is accepted as a careful and faithful perpetuation of the original corner position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

T21S R54E

1/4

S 3 | S 2

2001

Deposit the rebar inside and bury the mkd. stone alongside the stainless steel post.

Raise a mound of stone W. of the corner.

From this corner, the cor. of secs. 2, 3, 10 and 11, perpetuated by Kay L. Adams, Nevada Professional Land Surveyor No. 2050, in 1973, monumented with a rebar, 5/8 in. diam., with aluminum cap mkd. VTN ENGR CO RLS 2050, set in a mound of stone, alongside of which is a limestone, 14x8x6 ins., mkd. with 5 notches on the S. and 2 notches on the E. edges, bears S. 0°10'10" E., 40.478 chs. dist., as shown on Record of Survey File No. 26, Page No. 29, on file in the office of the Clark County recorder and is accepted as a careful and faithful perpetuation of the original corner position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.

T21S R54E

S 3 | S 2

S10 | S11

2001



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the rebar inside and bury mkd. stone alongside the stainless steel post.</p>
	<p>N. 1°49'50" E., bet. secs. 2 and 3.</p>
20.243	<p>The N 1/16 sec. cor. of secs. 2 and 3, an unrecorded determination by Gregory D. Rivero, Nevada Professional Land Surveyor No. 6902, monumented with a rebar, 5/8 in. diam., with aluminum cap mkd. VPOINT PLS 6902 and is accepted as a careful and faithful determination of the position of the corner.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">N 1/16 S 3   S 2</p>
	<p style="text-align: center;">2003</p>
	<p>Deposit the rebar inside the stainless steel post.</p>
	<p>From this corner, an unrecorded rebar, 5/8 in. diam., with aluminum cap mkd. RL HAFEN RLS 4428, bears N. 25°27'20" E., 0.014 chs. dist. This rebar is not utilized in the course of this resurvey.</p>
	<hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 1°51'20" E., beginning new measurement.</p>
20.466	<p>The original closing cor. of secs. 2 and 3, perpetuated by Kay L. Adams, Nevada Professional Land Surveyor No. 2050, in 1973, monumented with a rebar, 5/8 in. diam., with aluminum cap, mkd. VTN ENGR CO RLS 2050, set in a mound of stone, alongside of which is a limestone, 12x10x8 ins., mkd. with 2 notches on the E. and 4 notches on the W. edges, as shown on Record of Survey File No. 26, Page No. 29, on file in the office of the Clark County recorder, and is accepted as a careful and faithful perpetuation of the original corner position. Add the marks AM to the mkd. stone and bury it alongside the rebar.</p>
20.505	<p>Intersect the Fifth Standard Parallel South.</p>
	<p>Point for the closing cor. of secs. 2 and 3.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="889 275 1036 436"> <p>T20S R54E S35 S 3   S 2 T21S R54E CC</p> </div> <div data-bbox="930 470 992 499">2001</div> <div data-bbox="446 527 1398 615"> <p>From this corner, the standard cor. of secs. 34 and 35, T. 20 S., R. 54 E., bears N. 89°52'30" W., 2.473 chs. dist., hereinbefore described.</p> </div> <hr/> <div data-bbox="446 676 1433 737"> <p>The point for the 1/4 sec. cor. of sec. 2 only, is at midpoint on the N. bdy. of sec. 2.</p> </div> <div data-bbox="446 766 1433 856"> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> </div> <div data-bbox="889 884 1036 1003"> <p>T20S R54E 1/4 S 2 T21S R54E</p> </div> <div data-bbox="930 1035 992 1064">2001</div> <div data-bbox="446 1094 1398 1182"> <p>From this corner, the standard 1/4 sec. cor. of sec. 35, T. 20 S., R. 54 E., bears N. 89°52'30" W., 2.458 chs. dist., hereinbefore described.</p> </div> <hr/> <div data-bbox="446 1245 1459 1335"> <p>The point for the W 1/16 sec. cor. of sec. 2 only, is at midpoint bet. the closing cor. of secs. 2 and 3 and the 1/4 sec. cor. of sec. 2 only, on the N. bdy. of sec. 2.</p> </div> <div data-bbox="446 1365 1433 1455"> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> </div> <div data-bbox="889 1516 1036 1545"> <p>W 1/16 S2</p> </div> <div data-bbox="930 1575 992 1604">2003</div> <div data-bbox="446 1633 1414 1724"> <p>From this corner, the standard 1/4 sec. cor. of sec. 35, T. 20 S., R. 54 E., bears S. 89°52'30" E., 17.232 chs. dist., hereinbefore described.</p> </div>
--------	---

SUBDIVISION OF SECTION 2,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>From the 1/4 sec. cor. of secs. 2 and 11, perpetuated by Russell Avery, Nevada Professional Land Surveyor No. 2002, in 1973, monumented with a rebar, 1/2 in. diam., with plastic cap mkd. RE 2002, set in a mound of stone, alongside of which is a limestone, 10x10x8 ins., mkd. 1/4 on the N. face, as shown on Record of Survey File No. 27, Page No. 3, on file in the office of the Clark County recorder and is accepted as a careful and faithful perpetuation of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> T21S R54E  S 2  1/4 —  S11    2001 </div> <p>Deposit the rebar inside and bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone N. of the corner.</p> <p>N. 0°10'00" E., on the N-S center line of sec. 2.</p> <p>40.639 Point for the center 1/4 sec. cor. of sec. 2, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> T21S R54E  C 1/4 S 2    2003 </div> <p>61.000 Point for the C-N 1/16 sec. cor. of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> C  N 1/16   S 2  C    2003 </div> <p>71.10 Power transmission line, bears NW-SE.</p>
--------	--

SUBDIVISION OF SECTION 2,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
81.330	<p>The 1/4 sec. cor. of sec. 2 only, on the N. bdy. of sec. 2.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 1 and 2.</p> <p>N. 89°55'40" W., on the E-W center line of sec. 2.</p>
39.677	The center 1/4 sec. cor. of sec. 2.
59.965	<p>Point for the C-W 1/16 sec. cor. of sec. 2.</p> <p>NOT MONUMENTED.</p>
80.253	<p>The 1/4 sec. cor. of secs. 2 and 3.</p> <hr/> <p>From the point for the C-W 1/16 sec. cor. of sec. 2.</p> <p>N. 1°00'20" E., on the N-S center line of the NW1/4 of sec. 2.</p>
20.300	<p>Point for the NW 1/16 sec. cor. of sec. 2, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S 2</p> <p style="text-align: center;">2003</p>
30.457	<p>Point for the C-N-NW 1/64 sec. cor. of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S2</p> <p style="text-align: center;">C-N-NW</p> <p style="text-align: center;">1/64</p> <p style="text-align: center;">2006</p>
38.90	Power transmission line, bears NW-SE.
40.715	<p>The W 1/16 sec. cor. of sec. 2 only, on the N. bdy. of sec. 2.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 2.</p> <p>S. 89°53'20" W., on the E-W center line of the NW1/4 of sec. 2.</p>
14.991	Point for the C-W-E-NW 1/256 sec. cor. of sec. 2.

SUBDIVISION OF SECTION 2,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">1/256 C-W-E-NW S 2</p> <p style="text-align: center;">2003</p>
19.988	The NW 1/16 sec. cor. of sec. 2.
29.986	<p>Point for the C-W-NW 1/64 sec. cor. of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">1/64 C-W-NW S 2</p> <p style="text-align: center;">2003</p>
39.984	<p>The N 1/16 sec. cor. of secs. 2 and 3.</p> <hr/> <p>From the C-W-E-NW 1/256 sec. cor. of sec. 2.</p> <p>N. 0°47'40" E., on the computed N-S center line of the SW1/4NE1/4NW1/4 of sec. 2.</p>
10.163	<p>Point for the C-W-NE-NW 1/256 sec. cor. of sec. 2, at its computed position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">1/256 C-W-NE-NW S 2</p> <p style="text-align: center;">2003</p> <hr/> <p>S. 89°49'10" W., on a portion of the computed E-W center line of the NE1/4NW1/4 of sec. 2.</p>
4.960	<p>The C-N-NW 1/64 sec. cor. of sec. 2.</p> <hr/> <p>S. 89°45'40" W., on a portion of the computed E-W center line of the NW1/4NW1/4 of sec. 2.</p>

SUBDIVISION OF SECTION 2,  
T. 21 S., R. 54 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
9.923	<p>Point for the NW-NW 1/64 sec. cor. of sec. 2, at its computed position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p>1/64 NW-NW S 2 2003</p> <hr/>
10.137	<p>S. 1°25'50" W., on a portion of the computed N-S center line of the NW1/4NW1/4 of sec. 2.</p> <p>The C-W-NW 1/64 sec. cor. of sec. 2.</p> <hr/> <p>GENERAL DESCRIPTION</p> <p>The average elevation of the area surveyed is about 3000 feet above sea level. General drainage is to the southwest. Vegetation consists of creosote and cacti.</p> <hr/>

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Steven E. Dagitz	Surveying Technician
T. Douglas Gilkerson	Surveying Technician
Mark G. Petrosine	Surveying Technician
John M. Connor	Survey Aid
Sean C. Whelan	Survey Aid

## CERTIFICATE OF SURVEY

We, Richard A. Zaninovich, Cadastral Surveyor, and Clay W. Morrow, Surveying Technician, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 9th day of April, 2001, and Supplemental Special Instructions bearing date of the 18th day of May, 2001, we have dependently resurveyed the Fifth Standard Parallel South, through a portion of Range 54 East, and a portion of the subdivisional lines, and subdivided section 2, Township 21 South, Range 54 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 14, 2007

(Date)

/For Richard A. Zaninovich  
(Cadastral Surveyor)March 12, 2007

(Date)

(Surveying Technician)

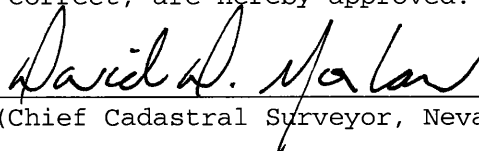
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Reno, Nevada

The foregoing field notes of the dependent resurvey of the Fifth Standard Parallel South, through a portion of Range 54 East, and a portion of the subdivisional lines, and the subdivision of section 2, Township 21 South, Range 54 East, Mount Diablo Meridian, Nevada, executed by Richard A. Zaninovich, Cadastral Surveyor, and Clay W. Morrow, Surveying Technician, having been critically examined and found correct, are hereby approved.

March 14, 2007

(Date)

(Chief Cadastral Surveyor, Nevada)~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in T. 21 S., R. 54 E., Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~(Date)~~~~(Chief Cadastral Surveyor, Nevada)~~