

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, AND A PORTION OF RANGE 57 EAST;  
PORTIONS OF THE EAST BOUNDARY,  
THE WEST AND NORTH BOUNDARIES,  
A PORTION OF THE SUBDIVISIONAL LINES  
AND PORTIONS OF CERTAIN MINERAL SURVEYS,  
TOWNSHIP 24 SOUTH, RANGE 58 EAST,  
OF THE MOUNT DIABLO MERIDIAN,  
IN THE STATE OF NEVADA

EXECUTED BY

Brian D. Hatter, Nevada Professional Land Surveyor  
Brock R. Clifford, Cadastral Surveyor  
Mark G. Petrosine, Surveying Technician

Under Contract No. L06PC05105,

and Special Instructions dated September 22, 2009,

and approved September 22, 2009,

which provided for the surveys included under Group No. 887,  
and Assignment Instructions dated February 8, 2010 and February 22, 2016.

Survey commenced April 1, 2010

Survey completed June 15, 2021

## INDEX DIAGRAM

TOWNSHIP 24 SOUTH, RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

27	27	26	24	23	22
21 6	68 5	57 4	49 3	40 2	34 1 15
67	67	57	48	39	33
20 7	66 8	56 9	47 10	39 11	32 12 15
65	64	55	47	38	31
20 18	64 17	54 16	46 15	37 14	31 13 14
63	63	54	45	37	30
19 19	62 20	53 21	44 22	35 23	29 24 13
61	61	52	43		
17 30	60 29	51 28	43 27	26	25
59	59	50	42		
16 31	58 32	49 33	41 34	35 35	28 36 13
12 10	9	8	6	5	3

M.S. No. 1715...PP 68-71  
 M.S. No. 1853...PP 71-76  
 M.S. No. 1855...PP 76-82  
 M.S. No. 1858...PP 82-84  
 M.S. No. 1859...PP 84-86  
 M.S. No. 1860...PP 87-89  
 M.S. No. 1861...PP 89-96  
 M.S. No. 1862...PP 97-105

M.S. No. 1864...PP 105-107  
 M.S. No. 1867...PP 108-109  
 M.S. No. 1921...PP 110-112  
 M.S. No. 2110...PP 112-115  
 M.S. No. 3934...PP 116-124  
 M.S. No. 4147...PP 124-140  
 M.S. No. 4350...PP 141-149  
 M.S. No. 4543...PP 149-151

M.S. No. 4552...PP 151-154  
 M.S. No. 4585...PP 154-156  
 M.S. No. 4587...PP 156-160  
 M.S. No. 4588...PP 160-163  
 M.S. No. 4687...PP 163-169  
 M.S. No. 4690...PP 169-173  
 M.S. No. 4739...PP 174-176

## TOWNSHIP 24 SOUTH, RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

The following field notes are those of the dependent resurvey of the Sixth Standard Parallel South, through Range 58 East, and a portion of Range 57 East; portions of the east boundary, the west and north boundaries, a portion of the subdivisional lines and portions of certain mineral surveys, Township 24 South, Range 58 East, Mount Diablo Meridian, Nevada.

The south boundary (Sixth Standard Parallel South), the north, east and west boundaries, and the subdivisional lines were surveyed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881 under Contract No. 115. The south boundary (Sixth Standard Parallel South), and a portion of the subdivisional lines were retraced and partially dependently resurveyed and the actual ground location of Mineral Survey No. 1921, Cresstone lode, was investigated and determined by U.S. Surveyor C.S. Swanholm in 1932 under Group No. 166. A portion of the east boundary and a portion of the subdivisional lines were dependently resurveyed and sections 25 and 26 were subdivided by Cadastral Surveyor J.J. Johnson in 2012-14 under this same Group.

## HISTORY OF MINERAL SURVEYS PERTAINING TO RESURVEY

Mineral Survey No. 1715, Clementina, Cleveland and Excelsior lodes were surveyed by U.S. Deputy Mineral Surveyor T.K. Stewart in 1895.

Mineral Survey No. 1853, Galena and Ruby Silver lodes were surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1855, Green Copper and Copper Glance lodes were surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1858, Bell lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1859, Iron Gold lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1860, Commercial lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1861, Desty, May, John and Black Lime lodes were surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1862, Ruth, North Extension, South Extension and Rattler lodes were surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1864, Chicago lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1866, Hirsching lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899. This survey was cancelled on September 30, 1908.

Mineral Survey No. 1867, Porphyryna lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899.

Mineral Survey No. 1921, Cresstone lode was surveyed by U.S. Deputy Mineral Surveyor H.W. Newby in 1900.

## TOWNSHIP 24 SOUTH, RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

Mineral Survey No. 1952, Honduras and Keystone lodes were surveyed by U.S. Deputy Mineral Surveyor H.B. Maxson in 1901. This survey was cancelled on April 6, 1903.

Mineral Survey No. 2110, Keystone, Honduras, Oversight, What Not, Empire and Bellevue lodes were surveyed by U.S. Deputy Mineral Surveyor H.K. Wheeler in 1903.

Mineral Survey No. 3934, Prairie Flower, Solio, West Prairie Flower and Yellow Pine Extension lodes were surveyed by U.S. Mineral Surveyor W.M. Brown in 1911.

Mineral Survey No. 4147, Rover, Bybee, Hilo, Capitano, Tail Ender, Iron Mountain, Big Chimney, Como, Radio, Scorpion, Consort and Queen lodes were surveyed by U.S. Mineral Surveyor C.E. McCarthy in 1913.

Mineral Survey No. 4350, Middlesex, Tinto, Utica and Telescope lodes were surveyed by U.S. Mineral Surveyor C.H. Fenner in 1918.

Mineral Survey No. 4543, Yellow Horse lode was surveyed by U.S. Mineral Surveyor F.W. Rodolf in 1922.

Mineral Survey No. 4552, Pocohontas lode was surveyed by U.S. Mineral Surveyor A.H. Black in 1922.

Mineral Survey No. 4585, Lovenia lode was surveyed by U.S. Mineral Surveyor F.W. Rodolf in 1923.

Mineral Survey No. 4587, Columbia, St. Patrick and St. Anthony lodes were surveyed by U.S. Mineral Surveyor F.W. Rodolf in 1924. The survey of the St. Anthony lode was cancelled on April 27, 2009.

Mineral Survey No. 4588, Frederickson and Dividend lodes were surveyed by U.S. Mineral Surveyor F.W. Rodolf in 1924.

Mineral Survey No. 4687, Bill Nye and Bill Nye No. 3 lodes were surveyed by U.S. Mineral Surveyor C.D. Baker in 1929.

Mineral Survey No. 4690, Akron lode was surveyed by U.S. Mineral Surveyor C.D. Baker in 1929.

Mineral Survey No. 4739, Prometheus No. 1 lode was surveyed by Mineral Surveyor C.D. Baker in 1936-1937.

Mineral Survey No. 4740, Akron Fraction lode was surveyed by Mineral Surveyor C.D. Baker in 1936-1937. This survey was cancelled on April 27, 2009.

Mineral Survey No. 4983, Cresstone No. 2 lode was surveyed by Mineral Surveyor M. Chilton in 1983. This survey was cancelled on April 27, 2009.

Before restoring the corners, the lines of the original surveys were retraced and a diligent search was made for any evidence of the original corners and other calls of the original field note record.

## TOWNSHIP 24 SOUTH, RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In the resurvey of mineral surveys, record bearing and distance, the grant boundary method, and methods to preserve parallel end and sidelines were applied. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 887, dated September 22, 2009.

Measurements were made with Trimble R7, R8 and R10 Global Positioning System (GPS) receivers using the real-time kinematic (RTK) method and refer to the true meridian based on geodetic methods. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.

The NAD 1983 (CORS96), (EPOCH:2002.0000) geographic position, of the standard cor. of Tps. 24 S., Rs. 58 and 59 E., as determined from GPS static observations processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuous Operating Reference Stations (CORS) NVPO MT. POTOSI CORS, NVTP TROPICANA CORS, and NVBM BERMUDA CORS, and carried forward by RTK observations is as follows:

Latitude: 35°48'32.844" N.      Longitude: 115°24'48.228" W.

The mean magnetic declination is 13°30' E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "GOODSPRINGS, NEVADA", provisional edition dated 1989.

---

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

---

Reestablishment of the Survey Executed by  
U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881  
and the Retracement and Partial Dependent Resurvey Executed by  
U.S. Surveyor C.S. Swanholm in 1932

---

Beginning at the standard cor. of Tps. 24 S., Rs. 58 and 59 E., perpetuated by Joseph P. Fielding, Nevada Professional Land Surveyor No. 6199, in 1991, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. NEVADA POWER COMPANY 31 36 6 RLS 6199, with a basalt stone, 14x12x7 ins. (Record, limestone, 17x14x11 ins.), mkd. with 6 notches on the N., S., and E. edges, firmly set alongside, as recorded in Clark County, Nevada, File 60, Page 95 of Surveys.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div>SC</div> <div>T24S</div> <div>R58E   R59E</div> <div>S36   S31</div> <hr/>
	<div>2010</div>
	<div>Insert the rebar inside and deposit the mkd. stone alongside the stainless steel post.</div>
	<div>N. 89°50'00" W., on the S. bdy. of sec. 36.</div>
5.20	<div>Wash, drains SE.</div>
6.350	<div>The closing cor. of Tps. 25 S., Rs. 58 and 59 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, and in a collar of stone, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</div>
21.40	<div>Graded dirt road, 15 lks. wide, bears NW. and SE.</div>
40.462	<div>The standard 1/4 sec. cor. of sec. 36, monumented with a limestone, 18x10x8 ins. (Record, 19x16x9 ins.), firmly set in a mound of stone, 1 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</div>
	<div>At the corner point</div>
	<div>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</div>
	<div>SC</div> <div>T24S R58E</div> <div>1/4 S36</div> <hr/>
	<div>2010</div>
	<div>Deposit the mkd. stone alongside the stainless steel post.</div> <hr/>
	<div>N. 89°52'10" W., beginning new measurement.</div>
6.027	<div>The N 1/4 sec. cor. of sec. 1, T. 25 S., R. 58 E., monumented with stainless steel post, 2 1/2 ins. diam., firmly set projecting 4 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</div>
18.00	<div>Ridge, bears NE. and SW., on spur, slopes NE.</div>
39.942	<div>The standard cor. of secs. 35 and 36, monumented with a limestone, 16x12x9 ins., firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. with 5 notches on the W. edge and 1 notch on the E. edge.</div> <div>At the corner point</div>

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">SC T24S R58E <u>S35 S36</u></p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 89°43'40" W., on the S. bdy. of sec. 35.</p>
0.70	Spur, slopes N.
6.224	The closing cor. of secs. 1 and 2, T. 25 S., R. 58 E., monumented with a brass tablet, 3 1/4 ins. diam., firmly set in solid rock, mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
21.70	Wash, 90 lks. wide, drains N. 10° E.
32.70	Dirt road, 15 lks. wide, bears N. 30° E. and S. 30° W.
40.208	<p>The standard 1/4 sec. cor. of sec. 35, monumented with a limestone, 16x13x10 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">SC T24S R58E <u>1/4 S35</u></p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 89°38'10" W., beginning new measurement.</p>
5.585	The N 1/4 sec. cor. of sec. 2, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set in a mound of stone, 5 ft. diam., with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
9.80	Dirt road, 15 lks. wide, bears NW. and SE.
12.00	Power line, bears N. 40° W. and S. 40° E.

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
18.10	Dirt road, 15 lks. wide, on top of ridge, bears N. 30° E. and S. 30° W.
29.60	Gulch, 10 lks. wide, drains N. 60° E.
40.140	The standard cor. of secs. 34 and 35, monumented with a limestone, 18x16x10 ins., firmly set in a mound of stone, 3 ft. diam., 12 ins. high, with 4 notches visible on the W. edge.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.
	<div style="text-align: center;"> SC  T24S R58E  S34 S35  <hr style="width: 50px; margin: 0 auto;"/> 2010 </div>
	Deposit the mkd. stone alongside the stainless steel post.
	S. 89°11'20" W., on the S. bdy. of sec. 34.
4.90	Dirt road, 10 lks. wide, bears N. 30° E. and S. 30° W.
5.014	The closing cor. of secs. 2 and 3, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground and in a mound of stone, 3 ft. diam., 6 ins. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
6.60	Gulch, 15 lks. wide, drains NE.
11.00	Spur, slopes NE.
15.10	Gulch, 15 lks. wide, drains NE.
39.402	The standard 1/4 sec. cor. of sec. 34, perpetuated by James L. Marlett Jr., Nevada Professional Land Surveyor No. 13386, in 2003, monumented with a rebar, 5/8 in. diam., 24 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. PLS 13386, with a limestone, 30x25x12 ins., mkd. 1/4 on a face, lying loose alongside, as recorded in Clark County Nevada, Corner Record No. 20030620.01344.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="883 213 1029 302"> SC T24S R58E 1/4 S34 </div> <div data-bbox="922 358 987 387">2010</div> <p data-bbox="438 415 1403 471">Insert the rebar inside and deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p data-bbox="438 520 1127 548">S. 89°40'50" W., beginning new measurement.</p> <p data-bbox="305 576 1451 657">5.124 Intersect line 1-2, Mineral Survey No. 1864, Chicago lode, at a point from which Cor. No. 1, hereinafter described, bears S. 22°21'20" E., 2.589 chs. dist.</p> <p data-bbox="305 681 1458 810">5.178 The N 1/4 sec. cor. of sec. 3, T. 25 S., R. 58 E., monumented with a brass tablet, 3 1/4 ins. diam., firmly set in solid rock, mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</p> <p data-bbox="289 834 1451 915">14.340 Intersect line 3-4, Mineral Survey No. 1864, Chicago lode, at a point from which Cor. No. 4, hereinafter described, bears S. 22°21'20" E., 2.937 chs. dist.</p> <p data-bbox="289 939 1273 967">16.00 Top of ridge, bears NE. and SW., on spur, slopes NE.</p> <p data-bbox="289 991 1175 1020">21.40 Head of ravine, 15 lks. wide, drains N. 10° W.</p> <p data-bbox="289 1044 1273 1072">34.20 Top of ridge, bears NW. and SE., on spur, slopes NW.</p> <p data-bbox="289 1096 1305 1124">36.50 Dirt road, 10 lks. wide, bears N. 50° W. and S. 30° E.</p> <p data-bbox="289 1149 1451 1358">39.512 The standard cor. of secs. 33 and 34, perpetuated by James L. Marlett Jr., Nevada Professional Land Surveyor No. 13386, in 2003, monumented with a rebar, 5/8 in. diam., 24 ins. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. PLS 13386, with a limestone, 16x10x8 ins., with 3 notches on the E. edge, and 3 notches on the W. edge, loosely set alongside, as recorded in Clark County, Nevada, Corner Record No. 20030620.01343.</p> <p data-bbox="438 1382 743 1411">At the corner point</p> <p data-bbox="438 1435 1419 1540">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="883 1564 1029 1653"> SC T24S R58E S33 S34 </div> <div data-bbox="922 1709 987 1737">2010</div> <p data-bbox="438 1766 1468 1822">Insert the rebar inside and deposit the mkd. stone alongside the stainless steel post.</p> <hr/>
--------	---

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	S. 89°50'10" W., on the S. bdy. of sec. 33.
5.228	The closing cor. of secs. 3 and 4, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set in a mound of stone, 6 ft., diam., 2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
10.684	Intersect line 4-1, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 1, hereinafter described, bears S. 38°28'40" W., 2.356 chs. dist.
13.00	Dirt road, 15 lks. wide, bears N. 50° E. and S. 50° W.
13.345	Intersect line 6-1, Mineral Survey No. 4739, Prometheus No. 1 lode, at a point from which Cor. No. 1, hereinafter described, bears S. 7°25'50" W., 3.146 chs. dist.
14.451	Intersect line 1-2, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 1, hereinafter described, bears S. 51°27'00" E., 2.942 chs. dist.
16.60	Dirt road, 15 lks. wide, bears N. 30° W. and S. 30° E.
16.90	Power line, bears N. 20° W. and S. 20° E.
17.036	Intersect line 1-2, Mineral Survey No. 4739, Prometheus No. 1 lode, at a point from which Cor. No. 1, hereinafter described, bears S. 46°34'00" E., 4.522 chs. dist.
40.062	<p>The standard 1/4 sec. cor. of sec. 33, perpetuated by James L. Marlett Jr., Nevada Professional Land Surveyor No. 13386, in 2003, monumented with a rebar, 5/8 in. diam., 24 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. PLS 13386, with a limestone, 22x18x13 ins., mkd. 1/4 on a face, lying loose alongside, as recorded in Clark County Nevada, Corner Record No. 20030620.01341.</p> <p>from which accessories established by Marlett, all monumented with rebar, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with aluminum cap, 1 1/2 ins. diam., mkd. RM PLS 13386, each bears</p> <p>N. 52°56' E., 153.4 lks. dist.  N. 52°56' E., 302.9 lks. dist.  S. 37°12' E., 148.2 lks. dist.  S. 37°12' E., 305.2 lks. dist.  S. 52°49' W., 151.6 lks. dist.  S. 52°49' W., 302.6 lks. dist.  N. 37°10' W., 152.5 lks. dist.  N. 37°10' W., 301.1 lks. dist.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>SC T24S R58E 1/4 S33</p> <hr/>
	<p>2010</p>
	<p>Insert the rebar inside and deposit the mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>S. 89°05'00" W., beginning new measurement.</p>
5.020	<p>The N 1/4 sec. cor. of sec. 4, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set in a mound of stone, 3 ft. diam., with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</p>
23.10	<p>Gulch, 10 lks. wide, drains N.</p>
37.70	<p>Top of Table Mountain.</p>
40.186	<p>The standard cor. of secs. 32 and 33, monumented with a lava stone, 21x9x7 ins. (Record, 16x14x10 ins.), firmly set in a mound of stone, 3 ft. diam., 12 ins. high, mkd. with 4 notches on the E. edge and 2 notches on the W. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p>SC T24S R58E S32   S33</p> <hr/>
	<p>2010</p>
	<p>Deposit the mkd. stone alongside the stainless post.</p> <hr/>
	<p>N. 89°38'50" W., on the S. bdy. of sec. 32.</p>
4.689	<p>The closing cor. of secs. 4 and 5, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</p>
43.30	<p>Gulch, 30 lks. wide, drains S. 40° E.</p>
47.404	<p>Point for the standard 1/4 sec. cor. of sec. 32, at proportionate distance; there is no remaining evidence of the original corner.</p>

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">SC T24S R58E 1/4 S32</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">2010</p>
52.634	The N 1/4 sec. cor. of sec. 5, T. 25 S., R. 58 E., monumented with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., firmly set in a mound of stone, 4 ft. diam., 1 1/2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
61.90	S. edge of gulch, 30 lks. wide, bears E. and W., drains ENE.
74.50	Saddle, bears N. 20° E. and S. 20° W.
83.20	Top of cliff.
91.40	Gulch, 60 lks. wide, drains irregularly N.
94.808	<p>Point for the standard cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SC T24S R58E S31   S32</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">2010</p> <p>From this point, Cor. No. 3, Mineral Survey No. 1921, Cresstone lode, hereinafter described, bears N. 46°53'00" W., 18.566 chs. dist.</p> <hr/> <p>N. 89°38'50" W., on the S. bdy. of sec. 31.</p>
1.00	Spur, slopes N. 30° W.
5.771	The closing cor. of secs. 5 and 6, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
7.70	Gulch, 10 lks. wide, drains NNW.
9.20	Spur, slopes N. 10° W.

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
13.80	Spur, slopes N. 30° W.
20.70	Top of ridge, bears N. 60° W. and S. 60° E.
31.40	Gulch, 30 lks. wide, drains NW.
37.60	Spur, slopes N. 60° W.
41.801	Intersect line 4-1, Mineral Survey No. 4687, Bill Nye lode, at a point from which Cor. No. 1, hereinafter described, bears S. 52°48'00" W., 4.624 chs. dist.
47.00	Wash, 50 lks. wide, drains S.
47.404	Point for the standard 1/4 sec. cor. of sec. 31, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.
	SC T24S R58E 1/4 S31 <hr/>
	2010
47.424	Intersect line 1-2, Mineral Survey No. 4687, Bill Nye lode, at a point from which Cor. No. 1, hereinafter described, bears S. 34°25'00" E., 3.431 chs. dist.
51.90	Sandy Valley Road, asphalt surface, 45 lks. wide, bears N. 10° E. and S. 10° W.
52.192	Intersect line 1-2, Mineral Survey No. 4687, Bill Nye No. 3 lode, at a point from which Cor. No. 2, identical with Cor. No. 2, Mineral Survey No. 4687, Bill Nye lode, hereinafter described, bears N. 18°23'20" E., 4.917 chs. dist.
53.175	The N 1/4 sec. cor. of sec. 6, T. 25 S., R. 58 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground and in a collar of stone, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.
61.229	Intersect line 5-6, Mineral Survey No. 4687, Bill Nye No. 3 lode, at a point from which Cor. No. 6, hereinafter described, bears S. 24°04'20" W, 2.822 chs. dist.
62.70	Spur, slopes S. 20° W.
70.10	Gulch, 40 lks. wide, drains S. 50° E.
82.40	Spur, slopes S. 10° W.
94.30	Top of ridge, bears N. 20° E. and S. 20° W.

DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH,  
THROUGH RANGE 58 EAST, MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 94.808</p>	<p>Point for the standard cor. of Tps. 24 S., Rs. 57 and 58 E., at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC T24S R57E   R58E S36   S31</p> <hr style="width: 50%; margin: auto;"/> <p>2010</p> </div>
	<p>DEPENDENT RESURVEY OF THE SIXTH STANDARD PARALLEL SOUTH, THROUGH A PORTION OF RANGE 57 EAST, MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881</p>
	<p>From the standard cor. of Tps. 24 S., Rs. 57 and 58 E., hereinbefore described.</p> <p>N. 89°38'50" W., on the S. bdy. of sec. 36.</p>
<p>5.060</p>	<p>The closing cor. of Tp. 25 S., Rs. 57 and 58 E., monumented with a brass tablet, 3 1/4 ins. diam., firmly set in solid rock, with top mkd. as described in the field notes of the dependent resurvey of T. 25 S., R. 58 E., executed concurrently under Group No. 891.</p>
<p>47.404</p>	<p>The standard 1/4 sec. cor. of sec. 36, T. 24 S., R. 57 E., monumented with a limestone, 17x12x7 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC T24S R57E 1/4 S36</p> <hr style="width: 50%; margin: auto;"/> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p>

DEPENDENT RESURVEY OF PORTIONS OF THE EAST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reestablishment of Portions of the Survey Executed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881</p>
	<p>From the cor. of Tps. 24 S., Rs. 58 and 59 E., hereinbefore described.</p> <p>N. 0°20'10" E., bet. secs. 31 and 36.</p>
34.35	Graded dirt road, 20 lks. wide, bears N. 30° W. and S. 30° E.
40.922	<p>Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S 1/4 R58E   R59E S36   S31</p> <p>2010</p> </div>
49.60	Main channel of braided wash, drains SE.
72.45	Nevada State Route 161, asphalt surface, 35 lks. wide, bears N. 60° W. and S. 60° E.
80.30	Trail road, 10 lks. wide, bears N. 75° E. and S. 75° W.
81.844	<p>The cor. of secs. 25, 30, 31 and 36, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the east boundary, T. 24 S., R. 58 E., executed under this same Group.</p> <hr/> <p>From the cor. of secs. 19, 24, 25 and 30, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set flush with the top of a mound of stone, 5 ft. diam., 2 ft. high, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the east boundary, T. 24 S., R. 58 E., executed under this same Group.</p> <p>N. 0°12'10" W., bet. secs. 19 and 24.</p>
41.252	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with a granite stone (Record, sandstone), 24x18x12 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF PORTIONS OF THE EAST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S 1/4 R58E R59E S24 S19</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°02'30" W., beginning new measurement.</p>
39.50	Top of hill.
40.394	<p>The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 22x10x3 ins. (Record, 27x12x8 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. with 3 grooves on the S. face and 3 grooves on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p>T24S R58E R59E S13 S18 <hr/>S24 S19</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 3°06'10" W., bet. secs. 13 and 18.</p>
33.70	Enter wash, drains S. 30° W.
38.20	Leave wash.
38.422	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p>T24S 1/4 R58E R59E S13 S18</p> <p>2010</p>
76.844	Point for the cor. of secs. 7, 12, 13 and 18, at proportionate distance; there is no remaining evidence of the original corner.



DEPENDENT RESURVEY OF PORTIONS OF THE EAST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E   R59E S12   S 7 <hr/>S13   S18 2010</p> </div> <hr/> <p>N. 3°06'10" W., bet. secs. 7 and 12.</p> <p>2.60 Wash, 90 lks. wide, drains S. 50° W.</p> <p>25.70 Spur, slopes S. 80° W.</p> <p>38.422 Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S 1/4 R58E   R59E S12   S 7 2010</p> </div> <p>39.20 Gulch, 20 lks. wide, drains S. 80° W.</p> <p>40.10 Gulch, 20 lks. wide, drains S. 20° W.</p> <p>76.844 Point for the cor. of secs. 1, 6, 7 and 12, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E   R59E S 1   S 6 <hr/>S12   S 7 2010</p> </div> <hr/> <p>N. 3°06'10" W., bet. secs. 1 and 6.</p> <p>3.70 Gulch, 50 lks. wide, drains W.</p> <p>28.80 Wash, 50 lks. wide, drains N. 70° W.</p>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF THE EAST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
38.422	<p>Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a chiseled X on bedrock surface, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S 1/4 R58E   R59E S 1   S 6</p> <p>2010</p> </div>
76.00	Wash, 30 lks. wide, drains N. 80° W.
76.844	<p>The cor. of Tps. 23 and 24 S., Rs. 58 and 59 E., monumented with a sandstone, 34x10x10 ins. (Record, 21x16x8 ins.), firmly set in a mound of stone, 5 ft. diam., 1/2 ft. high, mkd. with 6 notches on the N., E., S. and W. edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T23S R58E   R59E S36   S31 —+— S 1   S 6 T24S</p> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881</p> <hr/> <p>From the standard cor. of Tps. 24 S., Rs. 57 and 58 E., hereinbefore described.</p> <p>N. 12°04'10" E., bet. secs. 31 and 36.</p>
2.00	Ridge, bears E. and W., on spur, slopes W.
46.20	Spur, slopes S. 60° W.
46.950	Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S 1/4 R57E R58E S36 S31</p> <p style="text-align: center;">2010</p>
68.70	Spur, slopes S. 25° E.
83.10	Spur, and summit of line, slopes S. 70° E.
87.760	Intersect line 12-13, Mineral Survey No. 1861, John lode, at a point from which Cor. No. 12, identical with Cor. No. 18, Mineral Survey No. 1861, Black Lime lode, hereinafter described, bears S. 70°05'00" E., 5.644 chs. dist.
93.900	<p>The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, 27x12x6 ins. (Record, 16x12x5 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with 1 notch visible on the S. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R57E R58E S25 S30 —+— S36 S31</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 2°14'20" E., bet. secs. 25 and 30.</p>
3.064	Intersect line 14-11, Mineral Survey No. 1861, John lode, at a point from which Cor. No. 11, identical with Cor. No. 15, Mineral Survey No. 1861, Black Lime lode, and Cor. No. 9, Mineral Survey No. 1861, May lode, hereinafter described, bears S. 70°39'30" E., 7.001 chs. dist.
8.60	Gulch, 50 lks. wide, drains E.
15.556	Intersect line 3-4, Mineral Survey No. 1861, Desty lode, at a point from which Cor. No. 3, on line 10-5, Mineral Survey No. 1861, May lode, hereinafter described, bears S. 88°52'20" E., 10.258 chs. dist.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
24.609	Intersect line 1-2, Mineral Survey No. 1861, Desty lode, at a point from which Cor. No. 2, hereinafter described, bears S. 89°04'50" E., 11.219 chs. dist.
36.60	Gulch, 10 lks. wide, drains S. 70° E.
38.842	The 1/4 sec. cor. of secs. 25 and 30, monumented with a granite stone, 24x12x10 ins., firmly set in a mound of stone, 2 1/2 ft. diam., 1 1/2 ft. high, mkd. 1/4 on the W. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T24S 1/4 R57E R58E S25 S30  2010
	Deposit the mkd. stone alongside the stainless steel post.
	_____
	N. 0°25'50" W., beginning new measurement.
1.581	Intersect line 6-7, Mineral Survey No. 1715, Cleveland lode, at a point from which Cor. No. 6, identical with Cor. No. 9, Mineral Survey No. 1715, Excelsior lode, hereinafter described, bears N. 43°59'00" W., 3.186 chs. dist.
4.60	Top of ridge, bears E. and W.
38.80	Wash, main channel, 20 lks. wide, drains NW.
39.910	The cor. of secs. 19, 24, 25 and 30, perpetuated by person(s) unknown, monumented with an unrecorded rebar, 5/8 in. diam., 12 ins. long, projecting 2 ins. above the ground, with a sandstone 16x10x5 ins. (Record, 19x14x12 ins.), mkd. with 2 grooves on one face and 4 grooves on opposite face, lying loose alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="878 261 1029 406"> <div>T24S</div> <div>R57E   R58E</div> <div>S24   S19</div> <hr/> <div>S25   S30</div> </div> <div data-bbox="922 437 987 462">2010</div> <div data-bbox="440 493 1401 544">Insert the rebar inside and deposit the mkd. stone alongside stainless steel post.</div>
	<div data-bbox="440 596 1029 627">N. 0°39'20" W., bet. secs. 19 and 24.</div>
5.153	Intersect line 6-1, Mineral Survey No. 2110, Bellevue lode, at a point from which Cor. No 1, identical with Cor. No. 1, Mineral Survey No. 2110, Empire lode, hereinafter described, bears S. 37°46'00" E., 2.953 chs. dist.
39.856	The 1/4 sec. cor. of secs. 19 and 24, monumented with a limestone, 12x11x8 ins. (Record, 19x11x9 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. 1/4 on the W. face.
	<div data-bbox="440 917 743 942">At the corner point</div> <div data-bbox="440 969 1450 1073">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</div> <div data-bbox="878 1104 1029 1218"> <div>T24S</div> <div>1/4</div> <div>R57E   R58E</div> <div>S24   S19</div> </div> <div data-bbox="922 1249 987 1274">2010</div> <div data-bbox="440 1305 1360 1330">Deposit the mkd. stone alongside the stainless steel post.</div>
	<div data-bbox="440 1384 1105 1415">N. 1°37'50" W., beginning new measurement.</div>
7.00	Spur, slopes W.
26.70	Confluence of two washes, drains W.
38.832	The cor. of secs. 13, 18, 19 and 24, monumented with a fractured sandstone, 18x12x6 ins., loosely set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. on the upper portion with 3 grooves on the S. face and 3 grooves on the N. face.
	<div data-bbox="440 1680 743 1705">At the corner point</div> <div data-bbox="440 1732 1450 1835">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</div>

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;"> T24S  R57E R58E  S13 S18  <hr style="width: 50%; margin: 0 auto;"/> S24 S19    2010    Deposit the fractured stone alongside the stainless steel post. </div>
	<hr/> N. 0°58'10" E., bet. secs. 13 and 18.
27.90	Spur, slopes W.
39.304	Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="text-align: center;"> T24S  1/4  R57E R58E  S13 S18 </div>
	<div style="text-align: center;">2010</div>
61.30	Power line, bears N. 75° E. and S. 75° W.
70.80	Gulch, 30 lks. wide, drains S. 60° W.
78.608	The cor. of secs. 7, 12, 13 and 18, monumented with a basalt stone (Record, sandstone), 15x10x6 ins., firmly set in a mound of stone, 4 ft. diam., 1 1/2 ft. high, with 4 grooves visible on the S. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="text-align: center;"> T24S  R57E R58E  S12 S 7  <hr style="width: 50%; margin: 0 auto;"/> S13 S18 </div>
	<div style="text-align: center;">2010</div>
	Deposit the mkd. stone alongside the stainless steel post.
	<hr/> N. 0°31'50" W., bet. secs. 7 and 12.
28.20	Top of ridge, bears E. and W.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
39.858	<p>The 1/4 sec. cor. of secs. 7 and 12, monumented with a granite stone, 19x8x7 ins. (Record, sandstone, 24x10x8 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 1/2 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S 1/4 R57E R58E S12 S 7</p> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°04'50" W., beginning new measurement.</p>
0.80	Wilson Pass Road, graded dirt, 30 lks. wide, bears N. 40° E. and S. 40° W.
7.60	Wash, 30 lks. wide, drains SW.
13.40	Power line, bears N. 80° E. and S. 80° W.
40.844	<p>The cor. of secs. 1, 6, 7 and 12, monumented with a limestone, 26x7x4 ins. (Record, sandstone, 33x8x6 ins.), firmly set in a mound of stone, 4 ft. diam., 1/2 ft. high, with 5 grooves visible on the S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R57E R58E S 1 S 6 <hr/>S12 S 7</p> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 1°49'30" E., bet. secs. 1 and 6.</p>
9.50	Top of spur, slopes SW., and ridge, bears NNE. and SSW.
26.50	Top of ridge, bears N. 70° E. and S. 70° W.

DEPENDENT RESURVEY OF THE WEST BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
38.806	<p>Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate distance; falls on bedrock slope.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a chiseled X in bedrock surface and a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S 1/4 R57E R58E S 1 S 6</p> <p>2010</p> </div> <p>Cor. is located in gulch, 150 lks. wide, drains SW.</p>
59.30	S. edge of canyon, bears NE. and SW.
61.50	N. edge of canyon, bears NE. and SW.
77.612	<p>The cor. of Tps. 23 and 24 S., Rs. 57 and 58 E., monumented with a limestone, 20x11x8 ins. (Record, 25x10x10 ins.), firmly set in a mound of stone, 5 1/2 ft. diam., 1 1/2 ft. high, mkd. with 6 notches on the N., S., E. and W. edges.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T23S R57E R58E S36 S31 — — S 1 S 6 T24S</p> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881</p> <hr/> <p>From the cor. of Tps. 23 and 24 S., Rs. 58 and 59 E., hereinbefore described.</p> <p>N. 56°55'00" W., bet. secs. 1 and 36.</p>
21.10	Dirt road, 20 lks. wide, bears NE. and SW.



DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
33.902	<p>The 1/4 sec. cor. of secs. 1 and 36, monumented with a sandstone, 24x8x6 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S36 1/4 — S 1 T24S</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <p>Cor. is located in wash, 110 lks. wide, drains SW.</p> <hr/> <p>N. 89°57'30" W., beginning new measurement.</p>
40.762	<p>Point for the cor. of secs. 1, 2, 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S35 S36 — — S 2 S 1 T24S</p> <p style="text-align: center;">2010</p> <hr/> <p>N. 89°57'30" W., bet. secs. 2 and 35.</p>
0.25	Dirt road, 15 lks. wide, bears N. and S.
0.60	Underground gas pipeline, bears N. 3° W. and S. 3° E.
4.10	Wash, 1 ch. wide, drains S. 50° W.
27.20	Dirt road, 15 lks. wide, bears N. and S.
38.70	Dirt road, 20 lks. wide, bears N. 70° E. and S. 70° W.
40.762	Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S35 1/4 — S 2 T24S</p> <p style="text-align: center;">2010</p>
41.10	Dirt road, 20 lks. wide, bears N. 60° W. and S. 60° E.
42.00	Wash, 2 1/2 chs. wide, drains S.
42.60	Dirt road, 15 lks. wide, bears N. 20° W. and S. 20° E.
73.00	Wash, 40 lks. wide, drains irregularly SE.
81.524	<p>The cor. of secs. 2, 3, 34 and 35, perpetuated by person(s) unknown, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set in a mound of stone, 5 ft. diam., 1 1/2 ft. high, with a sandstone, 19x14x6 ins. (Record, 24x14x12 ins.), with 2 grooves visible on the E. face, loosely set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S34   S35 —   — S 3   S 2 T24S</p> <p style="text-align: center;">2010</p> <p>Insert the rebar inside and deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°42'10" W., bet. secs. 3 and 34.</p>
41.294	<p>The 1/4 sec. cor. of secs. 3 and 34, perpetuated by Loyal D. Olson, Nevada Professional Land Surveyor No. 5517, monumented with an unrecorded PVC post, 2 1/2 ins. diam., filled with concrete, 25 ins. long, with brass cap, 3 ins. diam., mkd. LDO III S34 T23S R58E 1/4 S3 5517 firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with a sandstone, 12x8x4 ins. (Record, 18x10x8 ins.), mkd. 1/4 on a face, lying loose alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S34 1/4 — S 3 T24S  2010</p> <p>Deposit the mkd. stone and the concrete filled PVC post alongside the stainless steel post.</p> <hr/> <p>S. 88°46'00" W., beginning new measurement.</p> <p>2.00 Wash, 30 lks. wide, drains S. 30° E.</p> <p>3.40 Wash, 30 lks. wide, drains N. 40° E.</p> <p>7.50 Wash, 30 lks. wide, drains S. 50° E.</p> <p>16.90 Dirt road, 15 lks. wide, bears N. and S.</p> <p>33.70 Road, asphalt surface, 35 lks. wide, bears N. 10° E. and S. 20° W.</p> <p>40.020 The cor. of secs. 3, 4, 33 and 34, perpetuated by Loyal D. Olson, Nevada Professional Land Surveyor No. 5517, monumented with an unrecorded PVC post, 2 1/2 ins. diam., filled with concrete, 25 ins. long, with brass cap, 3 ins. diam., mkd. LDO III R58E T23S S33 S34 S4 S3 1994 T24S 5517 PLS, firmly set in a mound of stone, 5 1/2 ft. diam., 3 ft. high, with a limestone, 23x17x9 ins. (Record, 19x14x12 ins.), mkd. with 3 grooves on one face and 3 grooves on an opposite face, lying loose alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T23S R58E S33   S34 —   — S 4   S 3 T24S  2010</p> <p>Deposit the mkd. stone and concrete filled PVC post alongside the stainless steel post.</p> <hr/>
--------	--

DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	S. 89°37'10" W., bet. secs. 4 and 33.
4.50	Wash, 50 lks. wide, drains SE.
12.10	Graded dirt road, 20 lks. wide, bears N. 30° W. and S. 30° E.
40.242	The 1/4 sec. cor. of secs. 4 and 33, monumented with a sandstone, 19x15x9 ins., firmly set in a mound of stone, 4 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.
	<div style="text-align: center;"> T23S R58E  S33  1/4 —  S 4  T24S    2010 </div>
	Deposit the mkd. stone alongside the stainless steel post.
	<hr/> S. 88°28'10" W., beginning new measurement.
4.40	Dirt road, 10 lks. wide, bears N. 40° W. and S. 40° E.
7.20	Wash, 2 chs. wide, drains S. 30° E.
39.756	The cor. of secs. 4, 5, 32 and 33, monumented with a granite stone, 21x9x7 ins. (Record, sandstone, 22x17x8 ins.), loosely set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible. This position correlates with other existent corners and is accepted as the best available evidence of the position of the original corner.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.
	<div style="text-align: center;"> T23S R58E  S32   S33  —+—  S 5   S 4  T24S    2010 </div>
	Deposit the granite stone alongside the stainless steel post.
	<hr/>

DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	S. 87°18'40" W., bet. secs. 5 and 32.
19.00	Spur, slopes NE.
37.80	Top of spur, slopes NE.
41.212	Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.  <div style="text-align: center;"> T23S R58E  S32  1/4 —  S 5  T24S   2010 </div>
82.424	Point for the cor. of secs. 5, 6, 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.  <div style="text-align: center;"> T23S R58E  S31 S32  — —  S 6 S 5  T24S   2011 </div>
	S. 87°18'40" W., bet. secs. 6 and 31.
23.00	Spur, slopes S.
28.50	Gulch, 15 lks. wide, drains S.
41.212	The 1/4 sec. cor. of secs. 6 and 31, monumented with a sandstone, 12x10x8 ins. (Record, 20x14x8 ins.), firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.  At the corner point  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T23S R58E S31 1/4 — S 6 T24S  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°55'30" W., beginning new measurement.</p> <p>4.20 Top of spur, slopes S.</p> <p>10.40 Gulch, 8 lks. wide, drains S.</p> <p>25.40 Ridge, bears N. and S., on spur, slopes S.</p> <p>38.805 The cor. of Tps. 23 and 24 S., Rs. 57 and 58 E., hereinbefore described.</p> <hr/> <p>DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyors J.M. Brunt and W.H. Proctor in 1881, and the Retracement and Partial Dependent Resurvey Executed by U.S. Surveyor C.S. Swanholm in 1932</p> <hr/> <p>From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 1°08'20" W., bet. secs. 35 and 36.</p> <p>39.10 Wash, 50 lks. wide, drains NE.</p> <p>41.616 Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p>T24S R58E 1/4 S35 S36  2010</p> <p>61.30 Dirt road, 15 lks. wide, bears N. 70° W. and S. 70° E.</p> <p>62.90 Wash, 50 lks. wide, drains S. 70° E.</p> <p>70.90 Wash, 90 lks. wide, drains S. 80° E.</p>
--------	--

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
83.232	<p>The cor. of secs. 25, 26, 35 and 36, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the subdivisional lines, T. 24 S., R. 58 E., executed under this same Group.</p> <hr/> <p>From the cor. of secs. 23, 24, 25 and 26, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, in a collar of stone, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the subdivisional lines, T. 24 S., R. 58 E., executed under this same Group.</p> <p>N. 0°03'30" E., bet. secs. 23 and 24.</p>
2.60	Power line, bears N. 55° W. and S. 55° E.
5.50	Dirt road, 45 lks. wide, bears E. and W.
10.30	Main channel of braided wash, 50 lks. wide, drains SSE.
40.70	Wash, 50 lks. wide, drains SW.
41.390	<p>The 1/4 sec. cor. of secs. 23 and 24, monumented with a sandstone, 21x13x4 ins. (Record, 30x18x10 ins.), firmly set in a mound of stone, 2 ft. diam., 6 ins. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S23 S24  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°05'00" E., beginning new measurement.</p>
23.20	Wash, 160 lks. wide, drains SW.
40.858	<p>The cor. of secs. 13, 14, 23 and 24, perpetuated by person(s) unknown, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with an unmarked aluminum cap, 2 ins. diam., with a limestone, 24x10x9 ins., set alongside, mkd. with 3 grooves on the S. face and 1 groove on the E. face. (Record, sandstone, 34x15x12 ins.) This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S14 S13</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S23 S24</p> </div> <p style="text-align: center;">2010</p> <p>Insert the rebar inside and deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 86°59'50" W., bet. secs. 13 and 24.</p>
40.450	<p>The 1/4 sec. cor. of secs. 13 and 24, monumented with a sandstone, 16x12x5 ins. (Record, 27x14x12 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S13</p> <p>1/4 —</p> <p>S24</p> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°53'00" W., beginning new measurement.</p>
5.80	Wash, 25 lks. wide, drains SW.
17.90	Dirt road, 15 lks. wide, bears N. 10° W. and S. 10° E.
18.30	Underground gas pipeline, bears N. 10° W. and S. 10° E.
20.30	Gulch, 20 lks. wide, drains SW.
30.30	Wash, 3 chs. wide, drains SW.
41.420	The cor. of secs. 13, 14, 23 and 24.



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	N. 0°25'50" E., bet. secs. 13 and 14.
42.618	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with a sandstone, 18x12x9 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S14 S13  2010</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°08'20" W., beginning new measurement.</p>
32.50	Wash, 4 chs. wide, drains W.
40.704	<p>The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 36x22x15 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, no marks visible. This position correlates well with other existing corners and calls of record, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S11 S12 ----- S14 S13  2010</p> <p>Deposit the sandstone alongside stainless steel post.</p> <hr/> <p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 76°36'40" W., bet. secs. 12 and 13.</p>
1.80	Wash, 90 lks. wide, drains S. 50° W.
28.30	Spur, slopes S. 20° W.
36.70	Wash, 50 lks. wide, drains SW.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
38.166	<p>The 1/4 sec. cor. of secs. 12 and 13, monumented with a sandstone, 15x10x6 ins. (Record, 30x24x18ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S12 1/4 — S13</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°42'00" W., beginning new measurement.</p>
28.60	Dirt road, 15 lks. wide, bears N. 10° W. and S. 10° E.
28.90	Underground gas pipeline, bears N. 10° W. and S. 10° E.
32.50	Wash, 1 ch. wide, drains SW.
40.294	The cor. of secs. 11, 12, 13 and 14.
	<hr/> <p>N. 0°06'20" W., bet. secs. 11 and 12.</p>
2.80	Wash, 80 lks. wide, drains S. 50° W.
6.00	Low spur, slopes SW.
19.40	Dirt road, 15 lks. wide, bears N. 60° W. and S. 60° E.
30.40	Wash, 1 ch. wide, drains S. 60° W.
35.30	Wash, 30 lks. wide, drains S. 50° W.
40.900	<p>The 1/4 sec. cor. of secs. 11 and 12, monumented with a sandstone, 25x10x5 ins. (Record, 24x12x10 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E 1/4 S11 S12</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°08'10" E., beginning new measurement.</p>
40.918	<p>The cor. of secs. 1, 2, 11 and 12, monumented with a flint stone, 27x14x11 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. with 5 notches on the S. edge and 1 notch on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p>T24S R58E S 2 S 1 —+— S11 S12</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 66°46'40" W., bet. secs. 1 and 12.</p>
15.50	Gulch, 50 lks. wide, drains SW.
22.00	Spur, slopes S. 30° W.
35.688	<p>The 1/4 sec. cor. of secs. 1 and 12, monumented with a sandstone, 24x19x12 ins. (Record, 30x12x12 ins.), firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E S 1 1/4 — S12  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°29'20" W., beginning new measurement.</p> <p>36.10 Dirt road, 15 lks. wide, bears N. and S.</p> <p>36.60 Underground gas pipeline, bears N. 3° W. and S. 3° E.</p> <p>40.432 The cor. of secs. 1, 2, 11 and 12.</p> <hr/> <p>N. 0°01'20" E., bet. secs. 1 and 2.</p> <p>40.606 The 1/4 sec. cor. of secs. 1 and 2, monumented with a sandstone, 17x8x5 ins., firmly set in a mound of stone, 1 1/2 ft. diam., 6 ins. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p>T24S R58E 1/4 S 2   S 1  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°11'00" W., beginning new measurement.</p> <p>1.50 Wash, 80 lks. wide, drains W.</p> <p>29.70 Dirt road, 20 lks. wide, bears E. and W.</p> <p>30.20 Underground gas pipeline, bears N. 3° W. and S. 3° E.</p> <p>35.90 Wash, 75 lks. wide, drains S. 70° W.</p> <p>38.90 Dirt road, 15 lks. wide, bears N. 3° W. and S. 3° E.</p> <p>40.948 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/>
--------	--

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 1°49'00" W., bet. secs. 34 and 35.</p>
4.90	Dirt road, 10 lks. wide, bears N. 30° E. and S. 30° W.
13.70	Gulch, 15 lks. wide, drains NE.
37.10	Confluence of 2 gulches, each 15 lks. wide, drains NE.
40.576	<p>The 1/4 sec. cor. of secs. 34 and 35, monumented with a limestone, 16x10x10 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S34 S35  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 1°55'50" E., beginning new measurement.</p>
16.20	Power line, bears N. 25° W. and S. 25° E.
16.70	Power line road, 10 lks. wide, irregularly parallels power line.
20.90	Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 70° E. and S. 70° W.
21.80	Power line, bears N. 80° E. and S. 80° W.
27.40	Wash, 2 chs. wide, drains E.
40.270	<p>The cor. of secs. 26, 27, 34 and 35, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set flush with the top of a mound of stone, 3 ft. diam., 1 ft. high, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the subdivisional lines, T. 24 S., R. 58 E., executed under this same Group.</p> <hr/> <p>From the cor. of secs. 22, 23, 26 and 27, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set flush with the top of a mound of stone, 5 ft. diam., 1 1/2 ft. high, with brass cap mkd. as described in the field notes of the 2012-14 dependent resurvey of a portion of the subdivisional lines, T. 24 S., R. 58 E., executed under this same Group.</p> <p>N. 4°28'30" W., bet. secs. 22 and 23.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
45.164	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a sandstone, 14x12x6 ins. (Record, 18x11x7 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S22 S23</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°18'30" E., beginning new measurement.</p>
9.80	Wash, 60 lks. wide, drains S. 40° E.
14.60	Wilson Pass Road, graded dirt, 50 lks. wide, bears N. 45° W. and S. 45° E.
16.20	Power line, bears N. 55° W. and S. 55° E.
40.924	<p>The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 16x12x8 ins. (Record, 20x12x8 ins.), loosely set in a mound of stone, 3 ft. diam., 6 ins. high, mkd. with 3 notches on the S. edge and 2 notches on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S15 S14 <hr/>S22 S23</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post, and raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.</p> <p>From this cor., an embedded mound of stone, 3 ft. diam., bears S. 1°08' W., 0.088 chs. dist.</p> <p>From this same cor., a 4x4 wood post., firmly set, no marks visible, bears S. 13°00' W., 0.576 chs. dist.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	From the cor. of secs. 13, 14, 23 and 24. S. 89°41'10" W., bet. secs. 14 and 23.
19.80	Wash, 2 chs. wide, drains S.
22.50	Remains of old dirt road, 12 lks. wide, bears N. and S.
23.70	Wash, 50 lks. wide, drains SSE.
38.70	Wash, 20 lks. wide, drains irregularly SSE.
41.164	Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.  T24S R58E S14 1/4 — S23  2010
51.50	Road, asphalt surface, 40 lks. wide, bears N. 20° W. and S. 20° E.
82.328	The cor. of secs. 14, 15, 22 and 23. <hr/>
	N. 0°02'10" W., bet. secs. 14 and 15.
34.60	Wash, 30 lks. wide, drains SE.
38.00	Wash, 50 lks. wide, drains SE.
41.010	The 1/4 sec. cor. of secs. 14 and 15, monumented with a sandstone, 17x7x5 ins., firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. 1/4 on the W. face.  At the corner point  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.  T24S R58E 1/4 S15 S14  2010  Deposit the mkd. stone alongside the stainless steel post. <hr/>
	N. 0°47'30" E., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
2.50	Road, asphalt surface, 40 lks. wide, bears N. 40° W. and S. 40° E.
42.806	<p>The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone 13x10x10 ins. (Record, 20x12x8 ins.), loosely set, mkd. with 4 notches on the S. edge and 2 notches on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S10   S11</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S15   S14</p> </div> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>N. 89°28'50" W., bet. secs. 11 and 14.</p>
3.20	Wash, 80 lks. wide, drains SW.
19.60	Wash, 5 chs. wide, drains S.
26.20	Dirt road, 20 lks. wide, bears N. and S.
37.60	Wash, 50 lks. wide, drains irregularly SSE.
41.036	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented with a sandstone, 15x8x5 ins., firmly set, projecting 5 ins. above the ground, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S11</p> <p>1/4 —</p> <p>S14</p> </div> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°32'10" W., beginning new measurement.</p>



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.934	The cor. of secs. 10, 11, 14 and 15.
	<hr/>
	N. 0°39'20" W., bet. secs. 10 and 11.
1.00	Dirt road, 15 lks. wide, bears N. 60° E. and S. 60° W.
40.964	The 1/4 sec. cor. of secs. 10 and 11, monumented with a sandstone, 18x8x5 ins., loosely set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the W. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.
	T24S R58E 1/4 S10 S11
	2010
	Deposit the mkd. stone alongside the stainless steel post.
	<hr/>
	N. 0°10'30" E., beginning new measurement.
35.90	Wash, 20 lks. wide, drains SE.
40.050	The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 7x6x5 ins. (Record, 15x12x8 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. with 5 notches on the S. edge and 2 notches on the E. edge.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T24S R58E S 3 S 2 S10 S11
	2010
	Deposit the mkd. stone alongside the stainless steel post.
	<hr/>
	From the cor. of secs. 1, 2, 11 and 12.
	N. 89°54'10" W., bet. secs. 2 and 11.
24.50	Right bank, braided wash, bears NNW. and SSE., continue across wash, drains SSE.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
30.70	Left bank, braided wash, bears NNW. and SSE., leave wash.
37.30	Dirt road, 15 lks. wide, bears N. and S.
39.80	Wash, 70 lks. wide, drains S. 50° E.
40.638	<p>The 1/4 sec. cor. of secs. 2 and 11, monumented with a sandstone, 19x12x4 ins. (Record, 24x12x5 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S 2</p> <p>1/4 —</p> <p>S11</p> <p>2010</p> </div> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 88°51'20" W., beginning new measurement.</p>
41.690	<p>The cor. of secs. 2, 3, 10 and 11.</p> <hr/> <p>N. 0°17'10" W., bet. secs. 2 and 3.</p>
39.730	<p>The 1/4 sec. cor. of secs. 2 and 3, monumented with a sandstone, 28x25x10 ins. (Record, 26x18x16 ins.), lying loose on bedrock surface, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 2-in. stem, in drill hole in bedrock surface, encased in concrete, with top mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>1/4</p> <p>S 3   S 2</p> <p>2010</p> </div> <p>Reset the mkd. stone alongside the brass tablet.</p> <hr/> <p>N. 1°09'40" E., beginning new measurement.</p>
27.00	Wash, 30 lks. wide, drains irregularly SE.
30.80	Dirt road, 15 lks. wide, bears NW. and SE.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
42.658	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.
	From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 0°47'40" W., bet. secs. 33 and 34.
1.50	Dirt road, 15 lks. wide, bears N. 70° W. and S. 70° E.
13.183	Intersect line 4-1, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 4, hereinafter described, bears N. 38°28'40" E., 3.442 chs. dist.
17.629	Intersect line 3-4, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 4, hereinafter described, bears S. 51°31'10" E., 2.814 chs. dist.
18.40	Top of ridge, bears E. and NW.
23.013	Intersect line 8-5, Mineral Survey No. 1853, Galena lode, at a point from which Cor. No. 5, hereinafter described, bears N. 50°12'40" E., 1.281 chs. dist.
24.824	Intersect line 5-6, Mineral Survey No. 1853, Galena lode, at a point from which Cor. No. 5, hereinafter described, bears S. 45°30'30" E., 1.414 chs. dist.
41.081	Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a chiseled X on exposed bedrock surface, and in a mound of stone, 7 ft. base, to top, with brass cap mkd.
	T24S R58E 1/4 S33 S34 2019
	from which
	An X with BO chiseled on a dark grey limestone bedrock surface, bears S. 22°27' E., 51.6 lks. dist.
	An X with BO chiseled on the top of the southerly boulder, 8x4x4 ft. high, on a limestone bench, bears S. 53°35' W., 30.9 lks. dist.
47.00	Top of spur, slopes N. 70° E.
53.70	Gulch, 20 lks. wide, drains NEE.
64.40	Top of spur, slopes E.
82.05	Sandy Valley Road, asphalt surface, 40 lks. wide, N. 70° W. and S. 70° E.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
82.162	<p>Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a PK nail, flush with asphalt surface of Sandy Valley Road from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 16 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, for a reference monument, bears N. 20°51' E., 75.6 lks. dist., mkd. RM T24S R58E S27 49.9 FT TO COR 2019 and an arrow pointing to the cor.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 16 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, to top, for a reference monument, bears N. 42°23' W., 138.7 lks. dist., mkd. RM T24S R58E S28 91.5 FT TO COR 2019 and an arrow pointing to the cor.</p> <p>Cor. is located 6 lks. S. of the N. edge of asphalt of Sandy Valley Road.</p>
	<hr/> <p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 89°17'30" W., bet. secs. 27 and 34.</p>
11.90	Power line road, 10 lks. wide, irregularly parallels power line.
12.80	Power line, bears N. 25° W. and S. 25° E.
40.406	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with a limestone, 18x14x4 ins., firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S27 1/4 — S34</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p>
	<hr/> <p>N. 89°53'50" W., beginning new measurement.</p>
38.50	Power line, bears N. 70° W. and S. 70° E.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
39.704	The cor. of secs. 27, 28, 33 and 34.
	N. 2°41'30" W., bet. secs. 27 and 28.
0.25	Power line, bears N. 80° W. and S. 80° E.
26.60	Top of ridge, bears NW. and SE.
38.90	Wash, 80 lks. wide, drains E.
40.063	Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T24S R58E 1/4 S28 S27
	2019
42.00	Trail road, 10 lks. wide, bears NW. and SE.
80.126	The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 19x15x12 ins. (Record, sandstone, 22x19x15 ins.), firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. with 2 grooves on the S. face and 3 grooves on the E. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T24S R58E S21 S22 S28 S27
	2010
	Deposit the mkd. stone alongside the stainless steel post.
	From the cor. of secs. 22, 23, 26 and 27.
	N. 88°52'40" W., bet. secs. 22 and 27.
14.10	Top of ridge, bears NW. and SE.
43.982	The 1/4 sec. cor. of secs. 22 and 27, monumented with a sandstone, 19x14x5 ins., firmly set, projecting 5 ins. above the ground, mkd. 1/4 on the N. face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S22 1/4 — S27</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°37'20" W., beginning new measurement.</p>
8.60	Dirt road, 10 lks. wide, bears N. 30° W. and S. 30° E.
9.00	Power line, bears N. 25° W. and S. 25° E.
12.90	Reimann Road, graded dirt, 50 lks. wide, bears N. 50° W. and S. 50° E.
16.30	Wash, 2 chs. wide, drains SE.
40.100	The cor. of secs. 21, 22, 27 and 28.
	<hr/> <p>N. 0°49'10" W., bet. secs. 21 and 22.</p>
4.90	Reimann Road, graded dirt, 50 lks. wide, bears N. 80° W. and S. 80° E.
9.70	Gulch, 50 lks. wide, drains SE.
42.632	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S21 S22</p> <p style="text-align: center;">2010</p> <p>From this point, Cor. No. 3, Mineral Survey No. 1859, Iron Gold lode, hereinafter described, bears S. 78°18'00" W., 33.380 chs. dist.</p>
48.60	Low ridge, bears NW. and SE.
57.90	Dirt road, 18 lks. wide, bears N. 30° W. and S. 30° E.
58.60	Overhead power line, bears N. 30° W. and S. 30° E.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
75.00	Dirt road, 20 lks. wide, bears E. and W.
81.50	Gulch, 20 lks. wide, drains irregularly E.
85.264	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 16x10x6 ins. (Record, 18x14x10 ins.), firmly set in a mound of stone, 4 ft. diam., 1 1/2 ft. high, mkd. with 3 notches on the S. edge and 3 notches on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S16 S15</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S21 S22</p> </div> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 89°56'00" W., bet. secs. 15 and 22.</p>
37.50	Power line, bears N. 55° W. and S. 55° E.
39.90	Wilson Pass Road, graded dirt, 50 lks. wide, bears N. 60° W. and S. 60° E.
40.988	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S15</p> <p>1/4 —</p> <p>S22</p> </div> <p>2010</p> <p>From this point, a sandstone, 13x12x8 ins. (Record, 18x10x7 ins.), mkd. 1/4 on a face, was found N. 80°38'00" E., 0.288 chs. dist., on the S. berm of gravel road, in a disturbed position. Original position indeterminate. Deposit the mkd. stone alongside the stainless steel post.</p>
81.976	The cor. of secs. 15, 16, 21 and 22.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	N. 1°18'40" W., bet. secs. 15 and 16.
23.60	Wilson Pass Road, gravel, 40 lks. wide, bears N. 70° W. and S. 70° E., leave hills, continue across rolling land.
26.70	Power line, bears N. 70° W. and S. 70° E.
28.70	Wash, 20 lks. wide, drains E.
41.516	<p>The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 19x15x5 ins. (Record, 28x15x7 ins.), firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S16 S15  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 1°54'30" E., beginning new measurement.</p>
40.852	<p>The cor. of secs. 9, 10, 15 and 16, perpetuated by person(s) unknown, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set, projecting 3 ins. above the ground, with plastic cap, 1 in. diam., no marks visible, with a sandstone, 19x12x12 ins. (Record, 25x15x12 ins.), mkd. with 4 notches on the S. edge and 3 notches on the E. edge, loosely set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S 9   S10 ----- S16   S15  2010</p> <p>Deposit the rebar inside and the granite stone alongside the stainless steel post.</p> <hr/>



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	From the cor. of secs. 10, 11, 14 and 15. S. 88°54'00" W., bet. secs. 10 and 15.
2.00	Dirt road, 12 lks. wide, bears N. 60° E. and S. 60° W.
24.00	Road, asphalt surface, 50 lks. wide, bears N. 20° W. and S. 20° E.
29.30	Dirt road, 12 lks. wide, bears NW. and SE.
40.20	Dirt road, 12 lks. wide, bears ENE. and WNW.
41.066	Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the position of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.  T24S R58E S10 1/4 — S15  2010  From this point, a sandstone, 13x13x7 ins. (Record, 18x10x7 ins.), mkd. 1/4 on side facing up, was found in a disturbed position on S. bank of graded dirt road S. of the cor. Original position indeterminate.  Deposit the mkd. stone alongside the stainless steel post.
44.80	Dirt road, 12 lks. wide, bears NW. and SE., in wash, 50 lks. wide, drains SE.
82.132	The cor. of secs. 9, 10, 15 and 16. <hr/>
	N. 0°10'30" W., bet. secs. 9 and 10.
13.10	Dirt road, 10 lks. wide, bears NW. and SE., in wash, 30 lks. wide, drains SE.
19.60	Enter wash, 10 lks. wide, drains SSE.; thence along wash.
24.20	Leave wash, 10 lks. wide, drains irregularly S.
40.802	The 1/4 sec. cor. of secs. 9 and 10, monumented with a sandstone, 12x7x6 ins. (Record, 18x10x8 ins.), firmly set, projecting 5 ins. above the ground, mkd. 1/4 on the W. face.  At the corner point  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E 1/4 S 9   S10</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 1°54'00" E., beginning new measurement.</p>
42.820	<p>The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone 13x10x7 ins. (Record, 17x14x7 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with 5 notches on the S. edge and 3 notches on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p>T24S R58E S 4   S 3 —   — S 9   S10</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>N. 88°37'10" W., bet. secs. 3 and 10.</p>
4.20	<p>Wash, 20 lks. wide, drains SE.</p>
40.028	<p>The 1/4 sec. cor. of secs. 3 and 10, monumented with a sandstone, 14x12x6 ins. (Record, 17x15x10 ins.), firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p>T24S R58E S 3 1/4 — S10</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	N. 89°56'10" W., beginning new measurement.
14.50	Road, asphalt surface, 40 lks. wide, bears N. 30° W. and S. 30° E.
40.444	The cor. of secs. 3, 4, 9 and 10.
	N. 0°08'20" W., bet. secs. 3 and 4.
40.036	Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.  T24S R58E 1/4 S 4   S 3  2019
67.10	Dirt road, 30 lks. wide, bears NW. and SE.
68.80	Dirt road, 20 lks. wide, bears E. and W.
72.00	Wash, 1 ch. wide, drains SE.
80.292	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.
	From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.  N. 1°22'00" W., bet. secs. 32 and 33.
41.222	Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.  T24S R58E 1/4 S32   S33  2010
54.00	Ridge, bears NE. and SW.
56.369	Intersect line 1-2, Mineral Survey No. 1860, Commercial lode, at a point from which Cor. No. 1, hereinafter described, bears S. 26°54'50" E., 2.599 chs. dist.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
63.213	Intersect line 2-3, Mineral Survey No. 1860, Commercial lode, at a point from which Cor. No. 2, hereinafter described, bears S. 64°50'30" W., 2.953 chs. dist.
72.20	Sandy Valley Road, asphalt surface, 50 lks. wide, bears N. 80° E. and S. 80° W.
78.60	Top of spur, slopes SE.
82.444	The cor. of secs. 28, 29, 32 and 33, monumented with a limestone, 14x12x8 ins., firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. with 1 notch on the S. edge and 4 notches on the E. edge.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="text-align: center;">           T24S R58E            S29 S28  <hr style="width: 50px; margin: 0 auto;"/>           S32 S33             2010         </div>
	Deposit the mkd. stone alongside the stainless steel post.
	From the cor. of secs. 27, 28, 33 and 34.
	S. 89°54'10" W., bet. secs. 28 and 33.
1.30	Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 85° W. and S. 85° E.
38.50	Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 40° E. and S. 40° W.
40.60	Power line, bears N. 40° E. and S. 40° W.
40.704	The 1/4 sec. cor. of secs. 28 and 33, monumented with a limestone, 16x12x5 ins., loosely set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 1/2 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E S28 1/4 — S33</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°24'10" W., beginning new measurement.</p>
36.80	Dirt road, 15 lks. wide, bears N. and S., in gulch, 20 lks. wide, drains S.
40.348	The cor. of secs. 28, 29, 32 and 33.
	<hr/> <p>N. 1°39'30" W., bet. secs. 28 and 29.</p>
16.60	Top of ridge, bears E. and W.
41.438	<p>Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p>T24S R58E 1/4 S29 S28</p> <p>2010</p>
	<p>From this point, Cor. No. 1, Mineral Survey No. 1858, Bell lode, hereinafter described, bears S. 38°00'00" W., 25.417 chs. dist.</p>
51.00	Graded dirt road, 40 lks. wide, bears NE. and SW.
54.950	Intersect line 13-14, Mineral Survey No. 1862, Rattler lode, at a point from which Cor. No. 13, hereinafter described, bears N. 32°08'50" E., 6.463 chs. dist.
62.647	Intersect line 16-13, Mineral Survey No. 1862, Rattler lode, at a point from which Cor. No. 13, hereinafter described, bears S. 58°44'30" E., 4.283 chs. dist.
71.279	Intersect line 5-6, Mineral Survey No. 1862, Ruth lode, at a point from which Cor. No. 16, Mineral Survey No. 1862, Rattler lode hereinafter described, bears S. 32°00'20" W., 7.245 chs. dist.
81.317	Intersect line 8-5, Mineral Survey No. 1862, Ruth lode, at a point from which Cor. No. 3, Mineral Survey No. 1862, North Extension lode, hereinafter described, bears S. 57°25'10" E., 2.768 chs. dist.
82.20	Spur, slopes S. 40° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
82.876	<p>Point for the cor. of secs. 20, 21, 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S20 S21</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S29 S28</p> </div> <p style="text-align: center;">2010</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 89°59'30" W., bet. secs. 21 and 28.</p>
36.20	Gravel road, 50 lks. wide, bears N. 70° E. and S. 70° W.
39.60	Wash, 50 lks. wide, drains NE.
40.130	<p>The 1/4 sec. cor. of secs. 21 and 28, monumented with a sandstone, 14x11x9 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1/4 on the N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S21</p> <p>1/4 —</p> <p>S28</p> </div> <p style="text-align: center;">2010</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <p>From this corner, Cor. No. 1, Mineral Survey No. 1859, Iron Gold lode, hereinafter described, bears N. 9°13'00" W., 12.304 chs. dist.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 86°39'20" W., beginning new measurement.</p>
3.50	Wash, 10 lks. wide, drains NE.
21.346	Intersect line 1-2, Mineral Survey No. 1862, North Extension lode, at a point from which Cor. No. 2, hereinafter described, bears S. 39°48'10" W., 10.162 chs. dist.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
34.527	Intersect line 3-4, Mineral Survey No. 1862, North Extension lode, at a point from which Cor. No. 3, hereinafter described, bears S. 44°22'50" W., 3.851 chs. dist.
39.10	Spur, slopes SW.
39.606	The cor. of secs. 20, 21, 28 and 29.
	N. 2°26'00" W., bet. secs. 20 and 21.
17.00	Gulch, 30 lks. wide, drains SW.
24.226	Intersect line 2-3, Mineral Survey No. 4350, Middlesex lode, at a point from which Cor. No. 2, Mineral Survey No. 4350, Utica lode, bears S. 75°06'00" W., 1.737 chs. dist.
28.30	Top of hill.
41.458	Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.
	T24S R58E 1/4 S20 S21  2010
51.289	Intersect line 4-1, Mineral Survey No. 4350, Tinto lode, at a point from which Cor. No. 1, hereinafter described, bears N. 81°04'40" E., 3.185 chs. dist.
51.321	Intersect line 2-3, Mineral Survey No. 1855, Green Copper lode, at a point from which Cor. No. 2, hereinafter described, bears N. 81°09'10" E., 3.232 chs. dist.
68.80	Spur, slopes NW.
74.584	Intersect line 4-1, Mineral Survey No. 1855, Green Copper lode, at a point from which Cor. No. 1, hereinafter described, bears N. 81°07'40" E., 0.645 chs. dist.
76.50	Dirt road, 15 lks. wide, bears E. and W.
78.10	Wash, 150 lks. wide, drains ENE.
82.916	The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 19x14x9 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. with 3 notches on the S. edge and 4 notches on the E. edge.  At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone and earth, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S17 S16</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S20 S21</p> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 89°55'50" W., bet. secs. 16 and 21.</p>
14.40	Power line, bears N. 30° W. and S. 30° E.
15.20	Dirt road, 20 lks. wide, bears N. 30° W. and S. 30° E.
40.974	<p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S16</p> <p>1/4 —</p> <p>S21</p> </div> <p style="text-align: center;">2010</p>
41.60	Wash, 1 ch. wide, drains SE.
55.90	Wash, 60 lks. wide, drains NE.
75.20	Graded dirt road, 15 lks. wide, bears NE. and SW.
81.948	The cor. of secs. 16, 17, 20 and 21.
	<hr/> <p>N. 0°30'40" E., bet. secs. 16 and 17.</p>
5.50	Top of low spur, slopes NE.
15.30	Trail road, 10 lks. wide, bears E. and W.
19.130	Intersect line 4-1, Mineral Survey No. 3934, Solio lode, at a point from which Cor. No. 4, hereinafter described, bears N. 32°13'20" E., 3.439 chs. dist.
21.00	Wash, 20 lks. wide, drains NE.



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
23.132	Intersect line 3-4, Mineral Survey No. 3934, Solio lode, at a point from which Cor. No. 4, hereinafter described, bears S. 58°41'50" E., 2.104 chs. dist.
24.30	Wash, 15 lks. wide, drains E.
41.463	Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.  T24S R58E 1/4 S17 S16  2010
45.60	Wash, 30 lks. wide, drains SE.
49.50	Wilson Pass Road, graded dirt, 45 lks. wide, bears N. 50° W. and S. 50° E.
53.30	Overhead power line, bears N. 70° W. and S. 70° E.
70.90	Power line road, 15 lks. wide, parallels power line.
71.20	Overhead power line, bears N. 70° W. and S. 70° E.
79.30	Trail road, 10 lks. wide, bears N. 50° E. and S. 50° W.
82.926	Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.  T24S R58E S 8 S 9 —+— S17 S16  2010
	From the cor. of secs. 9, 10, 15 and 16. S. 89°24'30" W., bet. secs. 9 and 16.
38.50	Wash, 25 lks. wide, drains ENE.
40.766	The 1/4 sec. cor. of secs. 9 and 16, monumented with a sandstone, 20x12x7 ins., firmly set, projecting 10 ins. above the ground, mkd. 1/4 on the N. face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S 9 1/4 — S16</p> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 88°43'10" W., beginning new measurement.</p>
30.50	Trail road, 10 lks. wide, bears N. and S.
34.00	Trail road, 10 lks. wide, bears N. 50° E. and S. 60° W.
40.848	The cor. of secs. 8, 9, 16 and 17.
	<hr/> <p>N. 1°43'50" E., bet. secs. 8 and 9.</p>
14.60	Top of ridge, bears N. and S. 20° W.; thence along ridge.
36.80	Leave ridge, bears S. and N. 10° W.
41.480	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S 8   S 9</p> <p style="text-align: center;">2010</p>
59.50	Spur, slopes E.
66.90	Gulch, 30 lks. wide, drains ESE.
72.10	Top of spur, slopes NE.
82.960	<p>The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 15x14x9 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible, on a rock shelf. This position correlates well with other existing corners and calls of record and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. in the ground, to solid rock, over a plastic-encased magnet and spike nail in rock shelf, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S 5   S 4 — S 8   S 9</p> <p style="text-align: center;">2010</p> <p>Deposit the sandstone alongside the stainless steel post.</p> <p>Cor. is located on spur, slopes E.</p> <hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 89°52'00" W., bet. secs. 4 and 9.</p>
34.10	Trail road, 10 lks. wide, bears N. and S.
40.188	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S 4 1/4 — S 9</p> <p style="text-align: center;">2010</p>
80.376	<p>The cor. of secs. 4, 5, 8 and 9.</p> <hr/> <p>N. 0°22'20" E., bet. secs. 4 and 5.</p>
39.666	<p>The 1/4 sec. cor. of secs. 4 and 5, monumented with a broken sandstone, 15x12x9 ins., set in place on solid rock, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 in. diam., 2-in. stem, in drill hole in solid rock, encased in concrete, and encircled with a mound of earth and stone, 4 ft. base, with top mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S 5   S 4</p> <p style="text-align: center;">2010</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the mkd. stone alongside the brass tablet in the mound of earth and stone.</p> <hr/> <p>N. 0°06'10" W., beginning new measurement.</p>
39.485	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 16°57'10" E., bet. secs. 31 and 32.</p>
5.167	<p>Intersect line 2-3, Mineral Survey No. 4690, Akron lode, at a point from which Cor. No. 3, hereinafter described, bears N. 82°45'10" E., 0.603 chs. dist.</p>
6.028	<p>Intersect line 3-4, Mineral Survey No. 4690, Akron lode, at a point from which Cor. No. 3, hereinafter described, bears S. 24°54'10" E., 0.824 chs. dist.</p>
24.00	<p>Top of ridge, bears N. 70° W. and S. 70° E.</p>
40.30	<p>Wash, 1 ch. wide, drains WSW.</p>
43.80	<p>Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 75° E. and S. 75° W.</p>
45.166	<p>The 1/4 sec. cor. of secs. 31 and 32, monumented with a basalt stone, 20x9x8 ins. (Swanholm Record, limestone, 20x17x12 ins.), firmly set in a mound of stone, 3 ft. diam., 12 ins. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S31 S32  2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <p>From this corner, Cor. No. 1, Mineral Survey No. 1921, Cresstone lode, hereinafter described, bears S. 60°20'40" W., 26.880 chs. dist.</p> <hr/> <p>N. 0°15'10" W., beginning new measurement.</p>
38.916	<p>The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 14x14x8 ins., firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. with 1 groove on the S. face and 5 grooves on the E. face.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S30   S29</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S31   S32</p> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 89°47'50" W., bet. secs. 29 and 32.</p> <p>7.80 Spur, slopes SW.</p> <p>28.20 Gulch, 20 lks. wide, drains irregularly S.</p> <p>39.912 Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S29</p> <p>1/4 —</p> <p>S32</p> </div> <p style="text-align: center;">2010</p> <p>From this point, Cor. No. 2, Mineral Survey No. 1858, Bell lode, hereinafter described, bears N. 33°11'00" E., 9.516 chs. dist.</p> <p>42.60 Top of ridge, bears N. and S.</p> <p>67.50 Wash, 1 ch. wide, in gulch, 1 ch. wide, drains S.</p> <p>79.824 The cor. of secs. 29, 30, 31 and 32.</p> <hr/> <p>N. 83°20'30" W., bet. secs. 30 and 31.</p> <p>0.20 Top of sharp ridge, bears N. 50° W. and S. 50° E.</p> <p>41.00 Ridge, bears N. 50° E. and S. 50° W.</p> <p>44.462 Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original corner.</p>
--------	--

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E S30 1/4 — S31</p> <p style="text-align: center;">2010</p>
56.00	Wash, 50 lks. wide, in gulch, 50 lks. wide, drains SE.
73.562	Intersect line 7-8, Mineral Survey No. 1861, May lode, at a point from which Cor. No. 8, on line 15-16, Mineral Survey No. 1861, Black Lime lode, hereinafter described, bears S. 30°41'20" W., 0.246 chs. dist.
88.746	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 0°12'00" E., bet. secs. 29 and 30.</p>
32.90	Top of ridge, bears E. and W.
38.20	Wash, 50 lks. wide, in gulch, 50 lks. wide, drains E.
39.430	<p>The 1/4 sec. cor. of secs. 29 and 30, monumented with a basalt stone, 30x22x10 ins. (Record, sandstone), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and calls of record, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T24S R58E 1/4 S30 S29</p> <p style="text-align: center;">2010</p> <p>Deposit the basalt stone alongside the stainless steel post.</p> <hr/> <p>N. 1°55'50" W., beginning new measurement.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
39.988	<p>The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone 12x8x6 ins. (Record, 15x13x11 ins.), firmly set in a mound of stone, 2 ft. diam., 1 ft. high, mkd. with 2 notches on the S. edge, and 5 notches on the E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S19 S20</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S30 S29</p> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p>
	<hr/> <p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 87°41'40" W., bet. secs. 20 and 29.</p>
2.253	Intersect line 8-5, Mineral Survey No. 1862, Ruth lode, at a point from which Cor. No. 8, hereinafter described, bears N. 57°25'10" W., 0.044 chs. dist.
2.307	Intersect line 7-8, Mineral Survey No. 1862, Ruth lode, at a point from which Cor. No. 8, hereinafter described, bears N. 34°00'00" E., 0.031 chs. dist.
8.30	Gulch, 10 lks. wide, drains SE.
39.342	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p> <p>S20</p> <p>1/4 —</p> <p>S29</p> </div> <p style="text-align: center;">2010</p>
47.90	Top of ridge, bears NW. and SE.
78.684	The cor. of secs. 19, 20, 29 and 30.
	<hr/> <p>N. 83°36'00" W., bet. secs. 19 and 30.</p>
7.00	Gulch, 10 lks. wide, drains S. 50° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
22.10	Top of spur, slopes S.
43.256	Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.  T24S R58E S19 1/4 — S30  2010
80.823	Intersect line 1-2, Mineral Survey No. 2110, Empire lode, at a point from which Cor. No. 1, identical with Cor. No. 1, Mineral Survey No. 2110, Bellevue lode, hereinafter described, bears N. 46°43'40" W., 4.994 chs. dist.
86.242	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described. <hr/>
	From the cor. of secs. 19, 20, 29 and 30.  N. 4°17'40" W., bet. secs. 19 and 20.
35.30	Saddle in spur, bears N. 50° E. and S. 50° W.
41.050	Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.  T24S R58E 1/4 S19 S20  2010
54.70	Gulch, 20 lks. wide, drains E.
82.100	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div style="text-align: center;"> T24S R58E  S18 S17  <hr style="width: 50%; margin: 0 auto;"/> S19 S20    2010 </div>
12.525     20.10  25.90  40.670	<hr/> <p>From the cor. secs. 16, 17, 20 and 21. S. 87°05'10" W., bet. secs. 17 and 20.</p> <p>Intersect line 1-2, Mineral Survey No. 3934, Prairie Flower lode, at a point from which Cor. No. 1, hereinafter described, bears N. 33°44'20" E., 7.067 chs. dist.</p> <p>Dirt road, 12 lks. wide, bears N. and S.</p> <p>Gulch, 50 lks. wide, drains NE.</p> <p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p>
     62.50  64.061  81.340	<div style="text-align: center;"> T24S R58E  S17  1/4 —  S20    2010 </div> <p>Spur, slopes SE.</p> <p>Intersect line 2-3, Mineral Survey No. 4147, Queen lode, at a point from which Cor. No. 2, hereinafter described, bears S. 28°41'50" E., 1.913 chs. dist.</p> <p>The cor. of secs. 17, 18, 19 and 20.</p>
    8.20  16.70  40.582	<hr/> <p>N. 85°28'40" W., bet. secs. 18 and 19.</p> <p>Cross low sag.</p> <p>N. end of ridge, bears N. and S.</p> <p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E S18 1/4 — S19</p> <p>2010</p>
81.356	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 17, 18, 19 and 20. N. 0°28'40" E., bet. secs. 17 and 18.</p>
11.90	Spur, slopes N. 30° E.
28.20	Gulch, 50 lks. wide, drains N. 40° E.
40.936	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p>T24S R58E 1/4 S18 S17</p> <p>2010</p>
81.872	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 2 1/2 ft. base, to top, with brass cap mkd.</p>
	<p>T24S R58E S 7   S 8 —+— S18   S17</p> <p>2010</p>
	<p>From the cor. of secs. 8, 9, 16 and 17. S. 86°21'00" W., bet. secs. 8 and 17.</p>
5.30	Low spur, slopes S.
10.60	Wash, 25 lks. wide, drains SE.
11.90	Trail road, 15 lks. wide, bears N. 20° E. and S. 20° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
14.50	Trail road, 15 lks. wide, bears N. 30° W. and S. 30° E., in wash, 25 lks. wide, drains SE.
26.70	Graded dirt road, 25 lks. wide, bears N. 80° W. and S. 80° E.
28.30	Overhead power line, bears N. 70° W. and S. 70° E.
38.90	Trail road, 15 lks. wide, bears N. 10° E. and S.
40.722	Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original corner.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.  T24S R58E S 8 1/4 — S17  2010
48.90	Power line, bears N. 15° E. and S. 15° W.
76.20	Power line, bears N. 70° W. and S. 70° E.
77.20	Wilson Pass Road, graded dirt, 40 lks. wide, bears N. 55° W. and S. 55° E.
81.444	The cor. of secs. 7, 8, 17 and 18. <hr/> N. 85°54'00" W., bet. secs. 7 and 18.
20.00	Power line, bears N. 75° E. and S. 75° W.
23.30	Power line road, 12 lks. wide, bears N. 75° E. and S. 75° W., in wash, 10 lks. wide, drains ENE.
35.00	Spur, slopes S. 10° E.
38.60	Gulch, 25 lks. wide, drains S. 30° E.
40.825	The 1/4 sec. cor. of secs. 7 and 18, monumented with a sandstone 19x19x6 ins. (Record, 21x12x7 ins.), partially buried, mkd. 1/4 on the N. face.  At the corner point  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E S 7 1/4 — S18</p> <p>2010</p> <p>Deposit the mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 89°41'00" W., beginning new measurement.</p>
35.70	Gulch, 20 lks. wide, drains S. 40° W.
39.718	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0°54'20" E., bet. secs. 7 and 8.</p>
2.00	Power line, bears N. 70° W. and S. 70° E.
3.20	Wilson Pass Road, graded dirt, 30 lks. wide, bears N. 55° W. and S. 55° E.
21.90	Power line, bears N. 70° W. and S. 70° E.
40.940	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p>T24S R58E 1/4 S 7   S 8</p> <p>2010</p>
50.00	Wash, 3 chs. wide, drains SE.
60.40	Graded dirt road, 25 lks. wide, bears N. 50° W. and S. 50° E.
69.10	Dirt road, 15 lks. wide, bears N. 30° W. and S. 30° E.
75.50	Dirt road, 15 lks. wide, bears N. 60° E. and S. 60° W.
81.880	Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div style="text-align: center;"> T24S R58E  S 6   S 5  <hr style="width: 50%; margin: 0 auto;"/> S 7   S 8    2010 </div>
	<hr/> <p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 85°40'20" W., bet. secs. 5 and 8.</p>
15.20	Spur, slopes S. 10° E.
29.70	Spur, slopes S.
40.00	Gulch, 50 lks. wide, drains S.
41.354	<p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<div style="text-align: center;"> T24S R58E  S 5  1/4 ———  S 8    2010 </div>
64.00	Gulch, 30 lks. wide, drains S.
73.20	Dirt road, 15 lks. wide, bears N. 20° E. and S. 20° W.
74.80	Power line, bears N. 30° E. and S. 30° W.
82.708	The cor. of secs. 5, 6, 7 and 8.
	<hr/> <p>N. 88°37'40" W., bet. secs. 6 and 7.</p>
0.70	Gulch, 25 lks. wide, drains S. 80° W.
4.30	Graded dirt road, 25 lks. wide, bears N. 20° W. and S. 20° E.
36.50	Ridge, bears N. 15° E. and S. 15° W.
41.202	<p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T24S R58E S 6 1/4 — S 7</p> <p>2010</p>
57.00	Gulch, 80 lks. wide, drains S.
65.10	Spur, slopes S.
70.20	Gulch, 1 ch. wide, drains S.
82.167	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 5, 6, 7 and 8. N. 0°13'10" E., bet. secs. 5 and 6.</p>
0.30	Gulch, 25 lks. wide, drains S. 80° W.
9.00	Graded dirt road, 15 lks. wide, bears N. 40° E. and S. 40° W.
40.936	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., on a 4 ft. wide rock shelf, over a plastic-encased magnet, and in a mound of stone, 8 ft. base, to top, with brass cap mkd.</p>
	<p>T24S R58E 1/4 S 6   S 5</p> <p>2010</p>
81.524	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.
	<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1715, TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Mineral Surveyor T.K. Stewart in 1895</p> <hr/> <p>Clementina lode</p> <p>From Cor. No. 3, Mineral Survey No. 1715, Clementina lode, on line 4-1, Mineral Survey No. 4543, Yellow Horse lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1715,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="808 424 1104 590"> </div> <p>2010</p> <p>Reset wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 43°58'00" W., on line 3-4, Mineral Survey No. 1715, Clementina lode.</p> <p>8.763 Cor. No. 4, Mineral Survey No. 1715, Clementina lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 4 USS 1715.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 1087 1047 1274"> </div> <p>2010</p> <p>Reset the mkd. wood post, inverted, alongside stainless steel post.</p> <hr/> <p>Thence N. 43°58'10" W., on a portion of line 4-1, Mineral Survey No. 1715, Clementina lode.</p> <p>0.556 Intersect line 2-3, Mineral Survey No. 1867, Porphyryna lode, at a point from which Cor. No. 2, hereinafter described, bears N. 10°29'40" W., 3.849 chs. dist.</p> <p>7.577 Cor. No. 8, Mineral Survey No. 1715, Cleveland lode.</p> <hr/>
--------	---

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1715,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Cleveland lode
	<p>From Cor. No. 6, Mineral Survey No. 1715, Cleveland lode, identical with Cor. No. 9, Mineral Survey No. 1715, Excelsior lode, monumented with a wood post, 4 ins. diam., 3 ft. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. diam. to top, with brass cap mkd.</p> <div data-bbox="812 673 1120 859"> <p>MS1715 EX 9 CLEV MS1715 6 S25 T24S R57E</p> </div> <p>2010</p> <p>Reset the wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 43°59'00" E., on line 6-7, Mineral Survey No. 1715, Cleveland lode.</p>
3.186	<p>Intersect the line bet. secs. 25 and 30, on the W. bdy. of the Tp., at a point from which the 1/4 sec. cor. of secs. 25 and 30, hereinbefore described, bears S. 0°25'50" E., 1.581 chs. dist.</p>
14.513	<p>Cor. No. 7, Mineral Survey No. 1715, Cleveland lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. P7 USS 1715.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 1491 1039 1699"> <p>CLEV MS1715 7 S30 T24S R58E</p> </div> <p>2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p>



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1715,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

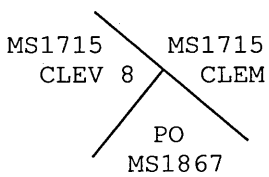CHAINS	Thence N. 44°06'30" E. on line 7-8, Mineral Survey No. 1715, Cleveland lode.
1.221	Intersect line 4-1, Mineral Survey No. 1867, Porphyryna lode, at a point from which Cor. No. 1, hereinafter described, bears N. 8°50'20" W., 5.249 chs. dist.
6.045	Cor. No. 8, Mineral Survey No. 1715, Cleveland lode, on line 4-1, Mineral Survey No. 1715, Clementina lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 1715.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	 <p>MS1715 CLEV 8      MS1715 CLEM</p> <p>PO MS1867</p> <p>2010</p>
	Deposit mkd. wood post, inverted, alongside the stainless steel post.
<p>DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853, TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <p>Reestablishment of Portions of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <p>Ruby Silver lode</p> <p>From Cor. No. 3, Mineral Survey No. 1853, Ruby Silver lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884 with a cedar post, 4 ft. long set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p>	

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="868 259 1047 435"> <p>MS1853 GA 3 RU SI MS1853</p> </div> <div data-bbox="922 466 990 493">2010</div> <p>Insert the rebar inside and the cedar post, inverted, alongside the stainless steel post.</p> <p>Thence S. 51°31'10" E., on line 3-4, Mineral Survey No. 1853, Ruby Silver lode.</p> <p>2.003 Intersect line 8-5, Mineral Survey No. 1853, Galena lode, at a point from which Cor. No. 5, bears N. 50°12'40" E., 5.538 chs. dist.</p> <p>6.277 Intersect the line bet. secs. 33 and 34, at a point from which the standard cor. of secs. 33 and 34, on the Sixth Standard Parallel South, hereinbefore described, bears S. 0°47'40" E., 17.629 chs. dist.</p> <p>9.091 Cor. No. 4, Mineral Survey No. 1853, Ruby Silver lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 1/2 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, with a cedar post, 4 ins. square, 4 ft. long, with illegible scribe marks, firmly set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 1346 1071 1533"> <p>MS1853 T24S 4 R58E RU SI S34</p> </div> <div data-bbox="922 1543 990 1570">2010</div> <p>Insert the rebar inside, and deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 38°28'40" W., on line 4-1, Mineral Survey No. 1853, Ruby Silver lode.</p>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
3.442	Intersect the line bet. secs. 33 and 34, at a point from which the standard cor. of secs. 33 and 34, on the Sixth Standard Parallel South, hereinbefore described, bears S. 0°47'40" E., 13.183 chs. dist.
20.319	Intersect the Sixth Standard Parallel South at a point from which the Standard Cor. of secs. 33 and 34, bears N. 89°50'10" E., 10.684 chs. dist.
22.675	<p>Cor. No. 1, Mineral Survey No. 1853, Ruby Silver lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, with a pine post, 4 ins. square, 4 ft. long, with illegible scribe marks, firmly set alongside rebar. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 963 1047 1212" data-label="Diagram"> </div> <p>Insert the rebar inside and deposit the wood post, inverted, alongside the stainless steel post.</p>
	<p>Thence N. 51°27'00" W., on line 1-2, Mineral Survey No. 1853, Ruby Silver lode.</p>
1.661	Intersect line 6-1, Mineral Survey No. 4739, Prometheus No. 1 lode, at a point from which Cor. No. 1, hereinafter described, bears S. 7°25'50" W., 2.338 chs. dist.
2.942	Intersect the Sixth Standard Parallel South, at a point from which the standard cor. of secs. 33 and 34, hereinbefore described, bears N. 89°50'10" E., 14.451 chs. dist.
9.087	<p>Cor. No. 2, Mineral Survey No. 1853, Ruby Silver lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, loosely set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, with a pine post, 4 ins. square, 4 ft. long, with an aluminum tag mkd. RUBY SILVER MS 1859 CORNER #2, firmly set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="844 424 1112 590"> <pre>       MS4739       PR 1          \           &lt; RU SI            / 2           /       MS1853       2010           </pre> </div> <p>Insert the rebar inside and deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p style="text-align: center;">Galena lode</p> <p>From Cor. No. 8, Mineral Survey No. 1853, Galena lode, identical with Cor. No. 5, Mineral Survey No. 4739, Prometheus No. 1 lode, determined by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, and a white PVC pipe, 2 ins. diam., 5 ft. long, firmly set alongside. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="787 1222 1088 1440"> <pre>       MS1853       GA       8      / \     /   \ MS4739 5  MS1853  PR 1    RU SI      \   /       2010           </pre> </div> <p>Deposit the PVC pipe alongside the stainless steel post.</p> <p>Thence N. 50°12'40" E., on line 8-5, Mineral Survey No. 1853, Galena lode.</p> <p>5.816 Intersect line 3-4, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 3, bears N. 51°31'10" W., 2.003 chs. dist.</p> <p>10.073 Intersect the line bet. secs. 33 and 34, at a point from which the 1/4 sec. cor. of secs. 33 and 34, hereinbefore described, bears N. 0°47'40" W., 18.068 chs. dist.</p>
--------	---


DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
11.354	<p>Cor. No. 5, Mineral Survey No. 1853, Galena lode, determined by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, and a white PVC pipe, 2 ins. diam., 5 ft. long, firmly set alongside. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 700 1063 886" data-label="Diagram"> <p>MS1853      T24S                     5      R58E                     GA      S34</p> <p>2010</p> </div> <p>Deposit the rebar inside, and the PVC pipe alongside, the stainless steel post.</p> <hr/> <p>Thence N. 45°30'30" W., on line 5-6, Mineral Survey No. 1853, Galena lode.</p>
1.414	<p>Intersect the line bet. secs. 33 and 34, at a point from which the 1/4 sec. cor. of secs. 33 and 34, hereinbefore described, bears N. 0°47'40" W., 16.257 chs. dist.</p>
9.182	<p>Cor. No. 6, Mineral Survey No. 1853, Galena lode, determined by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884, and a white PVC pipe, 2 ins. diam., 5 ft. long, firmly set alongside. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a chiseled X on bedrock and a plastic-encased magnet, and in a mound of earth and stone, 6 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 1626 1031 1854" data-label="Diagram"> <p>T24S R58E                     S33</p> <p>                    6                     GA                     MS1853</p> <p>2010</p> </div>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1853,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Insert the rebar inside, and the PVC pipe alongside, the stainless steel post.</p>
	<p>Cor. is located on NE. facing slope.</p>
	<p>Thence S. 50°22'50" W., on line 6-7, Mineral Survey No. 1853, Galena lode.</p>
11.460	<p>Cor. No. 7, Mineral Survey No. 1853, Galena lode, identical with Cor. No. 4, Mineral Survey No. 4739, Prometheus No. 1 lode, determined by James J. Owens, Nevada Professional Land Surveyor No. 2884, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. OWENS RLS 2884. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="771 903 1062 1152" data-label="Diagram"> </div> <p>Insert the rebar inside the stainless steel post.</p> <p>Cor. is located on W. facing slope.</p>
	<p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <p>Green Copper lode</p> <p>From Cor. No. 8, Mineral Survey No. 1855, Copper Glance lode, hereinafter described, on line 3-4, Mineral Survey No. 1855, Green Copper lode.</p> <p>Thence N. 9°01'50" W., on a portion of line 3-4, Mineral Survey No. 1855, Green Copper lode.</p>
3.30	<p>Enter graded area for commercial Utility Task Vehicle (UTV) course, bears NW. and SE.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
9.661	<p>Cor. No. 4, Mineral Survey No. 1855, Green Copper lode, monumented with the remains of a wood post, 4 ins. square, 12 ins. long, in a mound of stone, 4 ft. diam., 1 1/2 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a copper coated steel rod, 8 ins. long, 1/2 in. diam., 18 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E S20</p>  <p>2021</p> </div> <p>Deposit the wood post remains alongside the stainless steel post.</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, for a reference monument, bears N. 0°31' E., 200.1 lks. dist., with brass cap mkd. RM S20 GC4 MS1855 132.1 FT TO COR 2021 and an arrow pointing to the cor.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, for a reference monument, bears N. 73°42' W., 200.0 lks. dist., with brass cap mkd. RM S20 GC4 MS1855 132.0 FT TO COR 2021 and an arrow pointing to the cor.</p> <hr/> <p>Thence N. 81°07'40" E. on line 4-1, Mineral Survey No. 1855, Green Copper lode.</p>
2.70	Leave graded area for commercial UTV course, bears N. and S.
8.478	Intersect the line bet. secs. 20 and 21, at a point from which the cor. of secs. 16, 17, 20 and 21, hereinbefore described, bears N. 2°26'00" W., 8.332 chs. dist.
9.123	<p>Cor. No. 1, Mineral Survey No. 1855, Green Copper lode, monumented with a wood post, 4 ins. square, partially burnt, 5 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="883 389 1032 443" data-label="Text"> <p>T24S R58E S21</p> </div> <div data-bbox="883 464 993 629" data-label="Diagram"> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 8°48'50" E., on line 1-2, Mineral Survey No. 1855, Green Copper lode.</p> <p>23.118 Cor. No. 2, Mineral Survey No. 1855, Green Copper lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 1230 945 1284" data-label="Text"> <p>MS1855 GR CO</p> </div> <div data-bbox="818 1201 980 1334" data-label="Diagram"> </div> <div data-bbox="883 1334 1032 1388" data-label="Text"> <p>T24S R58E S21</p> </div> <p>2010</p> <p>Deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 81°09'10" W., on line 2-3, Mineral Survey No. 1855, Green Copper lode.</p> <p>3.232 Intersect the line bet. secs. 20 and 21, at a point from which the 1/4 sec. cor. of secs. 20 and 21, hereinbefore described, bears S. 2°26'00" E., 9.863 chs. dist.</p>
---------------	--



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

9.056

Cor. No. 3, Mineral Survey No. 1855, Green Copper lode, perpetuated by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with aluminum cap, 2 ins. diam., mkd. W STOUT PLS 14420, as recorded in Clark County, Nevada, File 185, Page 82 of surveys, with a 2nd rebar, unrecorded, 5/8 in. diam., 12 ins. long firmly set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



T24S R58E  
S20

2010

Insert both rebars inside the stainless steel post.

Thence N. 9°14'50" W., on a portion of line 3-4, Mineral Survey No. 1855, Green Copper lode.

3.947

Cor. No. 5, Mineral Survey No. 1855, Copper Glance lode.



Copper Glance lode

From Cor. No. 5, Mineral Survey No. 1855, Copper Glance lode, on line 3-4, Mineral Survey No. 1855, Green Copper lode, determined at the center of a partially scattered mound of stone containing wood post remains. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

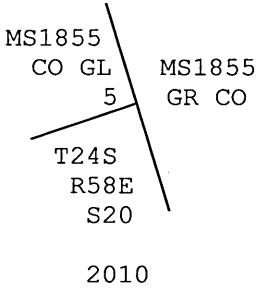CHAINS	
	
	<p>From this cor., a rebar, 1/2 in. diam., firmly set, bears N. 87°40'30" E., 0.080 chs. dist., as recorded in Clark County, Nevada, File 185, Page 82 of surveys. An aluminum cap, 2 in. diam., mkd. W. Stout PLS 14420 was found lying loose alongside rebar. This position is not utilized in the course this survey.</p> <p>Thence S. 74°54'10" W. on line 5-6, Mineral Survey No. 1855, Copper Glance lode.</p>
5.563	Cor. No. 5, Mineral Survey No. 4350, Telescope lode, identical with the N.E. Cor. of Alice lode (unsurveyed), hereinafter described.
21.043	<p>Cor. No. 6, Mineral Survey No. 1855, Copper Glance lode, monumented with a wood post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>  <p>2010</p>
7.038	<p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Thence N. 9°05'40" W. on line 6-7, Mineral Survey No. 1855, Copper Glance lode.</p> <p>Intersect line 1-2, Mineral Survey No. 4147, Rover lode, at a point from which Cor. No. 1, hereinafter described, bears N. 23°25'50" E., 3.925 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

9.103

Cor. No. 7, Mineral Survey No. 1855, Copper Glance lode, monumented with a wood post, 4 ins. square, 5 ft. long, partially burnt, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.



Deposit the wood post, inverted, alongside the stainless steel post.

Thence N. 73°49'20" E., on line 7-8, Mineral Survey No. 1855, Copper Glance lode.

1.441


Intersect line 1-2, Mineral Survey No. 4147, Rover lode, at a point from which Cor. No. 1, hereinafter described, bears N. 23°25'50" E., 1.265 chs. dist.

21.132

Cor. No. 8, Mineral Survey No. 1855, Copper Glance lode, on line 3-4, Mineral Survey No. 1855, Green Copper lode, monumented with a wood post, 4 ins. square, 3 1/2 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem., cemented in a drill hole in exposed limestone surface, over a magnet, 1 in. diam., 1 in. long, mkd.



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1855,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

from which

A chiseled X followed by the letters BO bears  
N. 70°13' W., 13.7 lks. dist., mkd. on the E. face of  
a nodule of limestone outcropping, 4x4x3 ft. high.

A chiseled X followed by the letters BO bears  
N. 50°13' W., 14.7 lks. dist., mkd. on the top face  
of a nodule of limestone outcropping, 3x1x1 1/2 ft.  
high.

Deposit wood post in a raised mound of stone, 5 ft. base,  
3 ft. high, on N. side of tablet.

---

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1858,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

---

Reestablishment of the Survey Executed by  
U.S. Deputy Mineral Surveyor H.W. Newby in 1899

---

Bell lode

From Cor. No. 1, Mineral Survey No. 1858, Bell lode, perpetuated  
by James J. Owens, Nevada Professional Land Surveyor No. 2884,  
and recovered by Spencer W. Hafen, Nevada Professional Land  
Surveyor No. 16459, in 2004, monumented with a rebar, 5/8 in.  
diam., 12 ins. long, firmly set in a mound of stone, 3 ft.  
diam., 1 ft. high, with aluminum cap, 3 1/4 ins. diam., mkd.  
OWENS PLS 2884 1-1858, with a cedar wood post, 4 ins. diam.,  
4 ft. long, with illegible scribe marks, firmly set alongside,  
as recorded in Clark County, Nevada, File 149, Page 0023 of  
Surveys. This is accepted as a careful and faithful perpetuation  
of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
24 ins. in the ground, over a plastic-encased magnet, with brass  
cap mkd.

MS1858 T24S  
1 R58E  
BE S29

2010

Deposit the wood post and rebar, inverted, alongside the  
stainless steel post.

Thence S. 53°20'50" W., on line 1-2, Mineral Survey No. 1858,  
Bell lode.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1858,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

22.256

Cor. No. 2, Mineral Survey No. 1858, Bell lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, and recovered by Spencer W. Hafen, Nevada Professional Land Surveyor No. 16459, in 2004, monumented with a rebar, 5/8 in. diam., 12 ins. long, projecting 3 ins. above the ground, with aluminum cap, 3 1/4 ins. diam., mkd. OWENS PLS 2884 2-1858, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 149, Page 0023 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.

MS1858  
BE  
2  
T24S R58E  
S29

2010

Deposit the cedar post and rebar, inverted, alongside the stainless steel post.

Thence N. 25°19'00" W., on line 2-3, Mineral Survey No. 1858, Bell lode.

9.730

Cor. No. 3, Mineral Survey No. 1858, Bell lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, and recovered by Spencer W. Hafen, Nevada Professional Land Surveyor No. 16459, in 2004, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with aluminum cap, 3 1/4 ins. diam., mkd. OWENS PLS 2884 3-1858, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 149, Page 0023 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.

T24S R58E  
S29  
MS1858  
3 BE

2010

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1858,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the cedar post and rebar, inverted, alongside the stainless steel post.</p>
	<p>Thence N. 55°06'10" E., on line 3-4, Mineral Survey No. 1858, Bell lode.</p> <p>22.083 Cor. No. 4, Mineral Survey No. 1858, Bell lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, and recovered by Spencer W. Hafen, Nevada Professional Land Surveyor No. 16459, in 2004, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 3 1/4 ins. diam., mkd. OWENS PLS 2884 4-1858, with a cedar post, 4 ins. diam., 5 ft. long, with illegible scribe marks, lying loose alongside, as recorded in Clark County, Nevada, File 149, Page 0023 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 948 1047 1156" data-label="Diagram"> </div> <p>Deposit the cedar post and rebar, inverted, alongside the stainless steel post.</p>
9.031	<p>Thence S. 25°36'40" E., on line 4-1, Mineral Survey No. 1858, Bell lode.</p> <p>Cor. No. 1, Mineral Survey No. 1858, Bell lode, and place of beginning.</p> <hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1859, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <hr/> <p>Iron Gold lode</p> <p>From Cor. No. 2, Mineral Survey No. 1859, Iron Gold lode, on line 4-1, Mineral Survey No. 4585, Lovena lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 12 ins. high, with illegible scribe marks.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1859,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.

	T24S
	R58E
MS4585	S21
LO	
	2
	I G
	MS1859

2010

Deposit the cedar post, inverted, alongside the stainless steel post.

Thence N. 89°25'30" E., on line 2-3, Mineral Survey No. 1859, Iron Gold lode.

9.097

Cor. No. 3, Mineral Survey No. 1859, Iron Gold lode, determined from a depression and wood post remains in the center of a mound of stone, 2 ft. diam., 6 ins. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.

	T24S R58E
	S21

	3
I G	
MS1859	

2010

Thence S. 0°52'20" E., on line 3-4, Mineral Survey No. 1859, Iron Gold lode.

23.585

Cor. No. 4, Mineral Survey No. 1859, Iron Gold lode, determined from a depression and wood post remains in the center of a mound of stone, 2 ft. diam., 6 ins. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1859,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="846 385 984 478"> <div>MS1859</div> <div>I G</div> <div>4</div> </div> <p>T24S R58E S21</p> <p>2010</p> <p>Cor. is located on the SE. edge of wash, drains NE.</p> <hr/> <p>Thence S. 89°13'00" W., on line 4-1, Mineral Survey No. 1859, Iron Gold lode.</p> <p>9.159 Cor. No. 1, Mineral Survey No. 1859, Iron Gold lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="935 1152 1073 1245"> <div>MS1859</div> <div>I G</div> <div>1</div> </div> <p>T24S R58E S21</p> <p>2010</p> <p>Deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence N. 0°43'20" W., on a portion of line 1-2, Mineral Survey No. 1859, Iron Gold lode.</p> <p>3.276 Cor. No. 1, Mineral Survey No. 4585, Lovena lode, hereinafter described.</p> <hr/>
--------	---



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1860,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS


Reestablishment of the Survey Executed by  
U.S. Deputy Mineral Surveyor H.W. Newby in 1899

Commercial lode

From Cor. No. 1, Mineral Survey No. 1860, Commercial lode, monumented with a cedar post, 4 ins. square, 5 ft. long, firmly set in a mound of stone, 4 ft. diam., 3 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



T24S R58E  
S33

2010

Deposit the cedar post, inverted, alongside stainless steel post.


Thence N. 26°54'50" W., on line 1-2, Mineral Survey No. 1860, Commercial lode.

2.599 Intersect the line bet. secs. 32 and 33, at a point from which the 1/4 sec. cor. of secs. 32 and 33, hereinbefore described, bears S. 1°22'00" E., 15.147 chs. dist.

8.864 Cor. No. 2, Mineral Survey No. 1860, Commercial lode, monumented with a wood post, 3 ins. diam., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in rock face, encased in concrete, with top mkd.



2010

Deposit the wood post alongside the brass tablet.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1860,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 64°50'30" E., on line 2-3, Mineral Survey No. 1860, Commercial lode.
2.953	Intersect the line bet. secs. 32 and 33, at a point from which the cor. of secs. 28, 29, 32 and 33, hereinbefore described, bears N. 1°22'00" W., 19.231 chs. dist.
24.091	<p>Point for Cor. No. 3, Mineral Survey No. 1860, Commercial lode, determined by the method of parallel end and side lines; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="844 663 1031 911" data-label="Diagram"> </div>
8.864	<p>Thence S. 26°54'50" E. on line 3-4, Mineral Survey No. 1860, Commercial lode.</p> <p>Cor. No. 4, Mineral Survey No. 1860, Commercial lode, monumented with a cedar post, 5 ins. square, 4 1/2 ft. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div data-bbox="828 1377 1136 1512" data-label="Diagram"> </div> <p>Deposit the cedar post, horizontal, alongside the stainless steel post and in the mound of stone.</p>
0.621	<p>Thence S. 64°50'30" W., on line 4-1, Mineral Survey No. 1860, Commercial lode.</p> <p>The point for Cor. No. 1, Mineral Survey No. 4588, Frederickson lode, hereinafter described.</p> <p>Continue measurement on line 4-1, identical with line 4-1, Mineral survey No. 4588, Frederickson lode.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1860,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
23.289	Cor. No. 4, Mineral Survey No. 4588, Frederickson lode, hereinafter described.
	Continue measurement on line 4-1, Mineral Survey No. 1860, Commercial lode.
24.091	Cor. No. 1, Mineral Survey No. 1860, Commercial lode, and place of beginning.
<hr/> <p>DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861, TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of Portions of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <hr/> <p>Desty lode</p> <p>From Cor. No. 1, Mineral Survey No. 1861, Desty lode. determined at record bearing and dist. from the location monument.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to bedrock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R57E</p> <p>S25</p> <div style="border-left: 1px solid black; border-top: 1px solid black; padding: 5px; display: inline-block;"> <p>1 DE</p> <p>MS1861</p> </div> <p>2016</p> </div> <p>From this point, the location monument, a rock cairn, 2 ft. diam., 3 ft. high, set on rock outcrop, bears N. 44°30'00" E., 1.576 chs. dist.</p> <p>Thence S. 89°04'50" E., on line 1-2, Mineral Survey No. 1861, Desty lode.</p>	
11.852	Intersect the line bet. secs. 25 and 30, on the W. bdy. of the Tp., at a point from which the 1/4 sec. cor. of secs. 25 and 30, bears N. 2°14'20" E., 14.233 chs. dist.
22.467	Intersect line 4-1, Mineral Survey No. 1867, Porphyryna lode, at a point from which Cor. No. 4, identical with Cor. No. 5, Mineral Survey No. 1861, May lode, hereinafter described, bears S. 8°50'20" E., 1.890 chs. dist.
23.071	Cor. No. 2, Mineral Survey No. 1861, Desty lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with scribe marks 1861, and an aluminum tag mkd. DESTY #2.
	At the corner point

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="820 357 1104 500"> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a NE. facing slope, near the top of a ridge, bears N. and S.</p> <hr/> <p>From Cor. No. 3, Mineral Survey No. 1861, Desty lode, on line 10-5, Mineral Survey No. 1861, May lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="787 1134 1039 1338"> </div> <p style="text-align: center;">2010</p> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Thence N. 88°52'20" W., on line 3-4, Mineral Survey No. 1861, Desty lode.</p> <p>10.258 Intersect the line bet. secs. 25 and 30, on the W. bdy. of the Tp., at a point from which the cor. of secs. 25, 30, 31 and 36, hereinbefore described, bears S. 2°14'20" W., 15.556 chs. dist.</p> <p>23.149 Point for Cor. No. 4, Mineral Survey No. 1861, Desty lode, determined at record bearing and dist. from the center of an inclined shaft.</p> <p>At the corner point</p>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, cemented in a drill hole, encased in concrete, on a limestone spur, slopes SE., with top mkd.</p> <div data-bbox="824 362 1039 507"> <p>MS1861 T24S 4 DE R57E S25</p> </div> <p>2016</p> <p>From this point, an inclined shaft to the south, 4 ft. wide, bears N. 64°40'00" E., 3.33 chs dist.</p>
<p>9.091</p>	<p>Thence N. 8°48'30" E., on line 4-1, Mineral Survey No. 1861, Desty lode.</p> <hr/> <p>Cor. No. 1, Mineral Survey No. 1861, Desty lode.</p> <hr/> <p>May lode</p> <p>From Cor. No. 6, Mineral Survey No. 1861, May lode, identical with Cor. No. 3, Mineral Survey No. 1867, Porphyryna lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1867 1861.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="873 1253 1088 1419"> <p>MS1867 PO 3 MA 6 MS1861</p> <p>T24S R58E S30</p> </div> <p>2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on the E. side of a ravine, drains S.</p> <p>Thence S. 8°11'30" W., on line 6-7, Mineral Survey No. 1861, May lode.</p>
<p>15.523</p>	<p>Cor. No. 7, Mineral Survey No. 1861, May lode, monumented with a cedar post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. 1861.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.

MS1861 / T24S  
7 / R58E  
MA / S30

2010

Deposit the mkd. post, inverted, alongside the stainless steel post.

Cor. is located on a SE. facing slope.

Thence S. 30°41'20" W., on line 7-8, Mineral Survey No. 1861, May lode.

6.10 Dirt road, 25 lks. wide, bears NW. and SE., in wash, 50 lks. wide, drains SE.

6.693 Intersect the line bet. secs. 30 and 31, at a point from which the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described, bears N. 83°20'30" W., 15.184 chs. dist.

6.939 Cor. No. 8, Mineral Survey No. 1861, May lode, on line 15-16, Mineral Survey No. 1861, Black Lime lode, monumented with the remains of a wood post, 4 ins. square, 1 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.

MS1861 / T24S  
MA / R58E  
8 / S31

MS1861  
B L

2010

Deposit the wood post remains, alongside the stainless steel post.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

From Cor. No. 9, Mineral Survey No. 1861, May lode, identical with Cor. No. 15, Mineral Survey No. 1861, Black Lime lode and Cor. No. 11, Mineral Survey No. 1861, John lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.

T24S	/	MS
R58E	/	1861
S30	/	9 MA
<hr/>		
MS 11	/	15 MS
1861	/	1861
JO	/	B L

2010

Deposit the cedar post, inverted, alongside the stainless steel post.

Thence N. 24°24'40" E., on line 9-10, Mineral Survey No. 1861, May lode.

6.842

Cor. No. 10, Mineral Survey No. 1861, May lode, monumented with a wood post, 4 ins. diam., 3 ft. long, no marks visible, firmly set between two stone slabs. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. deep, to bedrock, and wedged between two limestone slabs, over an "X" chiseled in bedrock with brass cap mkd.

T24S	/	
R58E	/	MA
S30	/	10
	/	MS1861

2010


from which

An X with BO chiseled on an exposed limestone face,  
5x5 ft., bears S. 64°27' W., 11.3 lks. dist.

An X with BO chiseled on an exposed limestone face,  
5x8 ft., bears N. 54°14' W., 9.7 lks. dist.

Deposit the wood post, alongside the stainless steel post.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 8°53'40" E., on a portion of line 10-5, Mineral Survey No. 1861, May lode.
8.470	<p>Cor. No. 3, Mineral Survey No. 1861, Desty lode.</p> <hr/> <p style="text-align: center;">John lode</p> <p>From Cor. No. 12, Mineral Survey No. 1861, John lode, identical with Cor. No. 18, Mineral Survey No. 1861, Black Lime lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>MS1861</p>  <p>2010</p> </div> <p>Deposit the wood post, inverted, alongside stainless steel post.</p> <p>Cor. is located on the SE. edge of a gulch, drains NE.</p> <p>Thence N. 70°05'00" W., on line 12-13, Mineral Survey No. 1861, John lode.</p>
5.644	Intersect the line bet. secs. 31 and 36, on the W. bdy. of the Tp., at a point from which the cor. of secs. 25, 30, 31 and 36, hereinbefore described, bears N. 12°04'10" E., 6.140 chs. dist.
23.098	<p>Cor. No. 13, Mineral Survey No. 1861, John lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 2 ft. high, mkd. 13-1861.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a chiseled X on bedrock and a plastic-encased magnet, in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p>



DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

MS  
1861  
T24S JO  
R57E 13  
S36

2010

Deposit the mkd. wood post, inverted, alongside the stainless steel post.

From Cor. No. 14, Mineral Survey No. 1861, John lode, monumented with a cedar post, 4 ins. diam., 5 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, mkd. 14-1861.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.

T24S R57E  
S25

14  
MS1861  
JO

2010

Deposit the mkd. post, inverted, alongside the stainless steel post.

Thence S. 70°39'30" E., on line 14-11, Mineral Survey, No. 1861, John lode.

15.914 Intersect the line bet. secs. 25 and 30, on the W. bdy. of the Tp., at a point from which the cor. of secs. 25, 30, 31 and 36, hereinbefore described, bears S. 2°14'20" W., 3.064 chs. dist.

22.915 Cor. No. 11, Mineral Survey No. 1861, John lode, identical with Cor. No. 15, Mineral Survey No. 1861, Black Lime lode and Cor. No. 9, Mineral Survey No. 1861, May lode.

Black Lime lode

From Cor. No. 8, Mineral Survey No. 1861, May lode, on line 15-16, Mineral Survey No. 1861, Black Lime lode.

Thence S. 70°44'10" E., on a portion of line 15-16, Mineral Survey No. 1861, Black Lime lode.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1861,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

14.309

Cor. No. 16, Mineral Survey No. 1861, Black Lime lode, monumented with an unrecorded rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. J.L.M. INC. PLS 3572, with a cedar post, 4 ins. diam., 4 ft. long, the marks 1861 remaining, firmly set alongside. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



Insert the rebar inside and deposit the mkd. post, inverted, alongside the stainless steel post.


Thence S. 19°29'50" W., on line 16-17, Mineral Survey No. 1861, Black Lime lode.

9.534

Cor. No. 17, Mineral Survey No. 1861, Black Lime lode, monumented with a chiseled X, mkd. on a limestone cliff face, 29 ft. above a mound of stone, 5 ft. diam., 3 ft. high and base of cliff.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole at center of mkd. X on cliff face, encased in concrete, with top mkd.



Thence N. 69°57'50" W., on line 17-18, Mineral Survey No. 1861, Black Lime lode.

22.630

Cor. No. 18, Mineral Survey No. 1861, Black Lime lode, identical with Cor. No. 12, Mineral Survey No. 1861, John lode.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <hr/> <p>North Extension lode</p> <p>From Cor. No. 3, Mineral Survey No. 1862, North Extension lode, on line 5-8, Mineral Survey No. 1862, Ruth lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set, projecting 5 ins. above the ground, with aluminum cap, 3 ins. diam., mkd. OWENS RLS 2884 CORNER No 3 US-M-S 1862 +, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 859 1079 1129" data-label="Diagram"> </div> <p>Deposit the rebar at base of mound.</p> <p>Thence N. 44°22'50" E., on line 3-4, Mineral Survey No. 1862, North Extension lode.</p> <p>3.851 Intersect the line bet. secs. 21 and 28, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 86°39'20" W., 5.079 chs. dist.</p> <p>23.062 Cor. No. 4, Mineral Survey No. 1862, North Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="857 251 1068 482" data-label="Diagram"> </div> <p data-bbox="438 511 1448 562">Insert the rebar inside and the cedar post, inverted, alongside the stainless steel post.</p> <hr data-bbox="690 588 1218 596"/> <p data-bbox="438 619 1409 670">Thence S. 57°43'40" E., on line 4-1, Mineral Survey No. 1862, North Extension lode.</p> <p data-bbox="305 697 383 717">9.147</p> <p data-bbox="438 697 1463 956">Cor. No. 1, Mineral Survey No. 1862, North Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p data-bbox="438 983 740 1007">At the corner point</p> <p data-bbox="438 1034 1425 1136">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 ft. base, to top, with brass cap mkd.</p> <div data-bbox="805 1167 1101 1334" data-label="Diagram"> </div> <p data-bbox="438 1365 1406 1416">Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr data-bbox="690 1443 1218 1451"/> <p data-bbox="438 1473 1406 1524">Thence S. 39°48'10" W., on line 1-2, Mineral Survey No. 1862, North Extension lode.</p> <p data-bbox="285 1551 383 1571">12.516</p> <p data-bbox="438 1551 1425 1627">Intersect the line bet. secs. 21 and 28, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 86°39'20" W., 18.260 chs. dist.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 22.678</p>	<p>Cor. No. 2, Mineral Survey No. 1862, North Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 745 1055 963" data-label="Diagram"> </div> <p>Insert the rebar inside and deposit the cedar post alongside the stainless steel post.</p> <hr/> <p>Thence N. 58°17'50" W., on a portion of line 2-3, Mineral Survey No. 1862, North Extension lode.</p>
<p>8.216</p>	<p>Cor. No. 5, Mineral Survey No. 1862, Ruth lode.</p> <hr/> <p>Ruth lode</p> <p>From Cor. No. 5, Mineral Survey No. 1862, Ruth lode, on line 2-3, Mineral Survey No. 1862, North Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with a plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="841 247 1101 421" data-label="Diagram"> </div> <p data-bbox="927 451 992 476">2010</p> <p data-bbox="440 502 1414 553">Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p> <p data-bbox="440 580 1471 631">Thence S. 32°00'20" W., on a portion of line 5-6, Mineral Survey No. 1862, Ruth lode.</p> <p data-bbox="306 656 1438 737">8.300 Intersect the line bet. secs. 28 and 29, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 1°39'30" W., 11.597 chs. dist.</p> <p data-bbox="290 758 1252 788">15.545 Cor. No. 16, Mineral Survey No. 1862, Rattler lode.</p> <hr/> <p data-bbox="440 840 1471 1126">From Cor. No. 7, Mineral Survey No. 1862, Ruth lode, identical with Cor. No. 12, Mineral Survey No. 1862, South Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p data-bbox="440 1152 740 1183">At the corner point</p> <p data-bbox="440 1208 1438 1285">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <div data-bbox="813 1306 1122 1479" data-label="Diagram"> </div> <p data-bbox="927 1514 992 1539">2010</p> <p data-bbox="440 1565 1414 1616">Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p> <p data-bbox="440 1643 1284 1674">Cor. is located on the S. edge of a gulch draining E.</p> <p data-bbox="440 1698 1414 1749">Thence N. 34°00'00" E., on line 7-8, Mineral Survey No. 1862, Ruth lode.</p>
--------	--

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
22.684	Intersect the line bet. secs. 20 and 29, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 87°41'40" E., 2.307 chs. dist.
22.715	<p>Cor. No. 8, Mineral Survey No. 1862, Ruth lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with plastic cap mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 818 1047 1046" data-label="Diagram"> <p>T24S R58E S20 8 RU MS1862 2010</p> </div> <p>Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p>
	<hr/> <p>Thence S. 57°25'10" E., on a portion of line 8-5, Mineral Survey No. 1862, Ruth lode.</p>
0.044	Intersect the line bet. secs. 20 and 29, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 87°41'40" E., 2.253 chs. dist.
2.769	Intersect the line bet. secs. 28 and 29, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 1°39'30" W., 1.559 chs. dist.
5.537	Cor. No. 3, Mineral Survey No. 1862, North Extension lode.
	<hr/> <p>South Extension lode</p> <p>From Cor. No. 15, Mineral Survey No. 1862, Rattler lode, on line 9-10, Mineral Survey No. 1862, South Extension lode.</p> <p>Thence S. 32°05'20" W., on a portion of line 9-10, Mineral Survey No. 1862, South Extension lode.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

8.768

Cor. No. 10, Mineral Survey No. 1862, South Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with a plastic cap, 1 in. diam., mkd. OWENS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.



Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.

Thence N. 58°04'50" W., on line 10-11, Mineral Survey No. 1862, South Extension lode.

9.144

Cor. No. 11, Mineral Survey No. 1862, South Extension lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<div data-bbox="836 279 1128 466"> <p>T24S R58E S29      MS1862             11 SO EX</p> <p>2010</p> </div> <p>Insert the rebar inside and deposit the cedar post, inverted, alongside stainless steel post.</p> <hr/> <p>Thence N. 32°10'20" E., on line 11-12, Mineral Survey No. 1862, South Extension lode.</p> <p>19.927      Cor. No. 12, Mineral Survey No. 1862, South Extension lode, identical with Cor. No. 7, Mineral Survey No. 1862, Ruth lode.</p> <hr/> <p style="text-align: center;">Rattler lode</p> <p>From Cor. No. 16, Mineral Survey No. 1862, Rattler lode, on line 5-6, Mineral Survey No. 1862, Ruth lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, with plastic cap, 1 in. diam., firmly set in a mound of stone, 2 ft. diam., 1 ft. high with a cedar post, 4 ins. diam., 5 ft. long, with illegible scribe marks, firmly set alongside, as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="860 1295 1144 1543"> <p>MS1862 RU      T24S R58E             S29</p> <p>16</p> <p>MS1862 RA</p> <p>2010</p> </div> <p>Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p> <p>Thence S. 58°44'30" E., on line 16-13, Mineral Survey No. 1862, Rattler lode.</p> <p>4.785      Intersect the line bet. secs. 28 and 29, at a point from which the cor. of secs. 20, 21, 28 and 29, hereinbefore described, bears N. 1°39'30" W., 20.229 chs. dist.</p>
---------------	--

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 9.068</p>	<p>Cor. No. 13, Mineral Survey No. 1862, Rattler lode, determined by Grant Boundary Method between Cor. Nos. 14 and 16, Mineral Survey No. 1862, Rattler lode, utilizing the record recorded in Clark County, Nevada, File 87, Page 14 of Surveys by James J. Owens, Nevada Professional Land Surveyor No. 2884. There is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the surface of dirt road, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="812 538 1136 766"> </div> <p>Cor. is located on the N. side of a dirt road, 15 lks. wide, bears NW. and SE.</p>
<p>6.463</p>	<p>Thence S. 32°08'50" W., on line 13-14, Mineral Survey No. 1862, Rattler lode.</p> <p>Intersect the line bet. secs. 28 and 29, at a point from which the 1/4 sec. cor. of secs. 28 and 29, hereinbefore described, bears S. 1°39'30" E., 13.512 chs. dist.</p>
<p>18.199</p>	<p>Cor. No. 14, Mineral Survey No. 1862, Rattler lode, perpetuated by James J. Owens, Nevada Professional Land Surveyor No. 2884, in 1995, monumented with a rebar, 1/2 in. diam., 12 ins. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with plastic cap, 1 in. diam., mkd. OWENS PLS 2884, with a cedar post, 4 ins. diam., 4 ft. long, with illegible scribe marks, firmly set alongside as recorded in Clark County, Nevada, File 87, Page 14 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="828 1491 1055 1740"> </div> <p>Insert the rebar inside and deposit the cedar post, inverted, alongside the stainless steel post.</p>



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 1862,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 58°51'40" W., on line 14-15, Mineral Survey No. 1862, Rattler lode.
9.051	<p>Cor. No. 15, Mineral Survey No. 1862, Rattler lode, on line 9-10, Mineral Survey No. 1862, South Extension lode, determined at the base of a damaged steel fence post, bent over, 2 ft. below the surface of the ground with the remains of a wood post alongside. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="857 658 1117 936" data-label="Diagram"> </div> <p>Deposit the wood post remains and the steel fence post alongside the stainless steel post.</p> <p>Cor. is located on the S. edge of a graded dirt road, 15 lks. wide, bears E. and W.</p> <hr/> <p>DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1864, TPS. 24 &amp; 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p> <hr/> <p>Chicago lode</p> <p>From the point for Cor. No. 1, Mineral Survey No. 1864, Chicago lode, determined at record angle and distance from Cor. No. 4; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p>


DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1864,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="841 271 987 389"> </div> <div data-bbox="881 410 1027 462"> <p>T25S R58E S 3</p> </div> <div data-bbox="922 499 987 524"> <p>2010</p> </div> <p data-bbox="435 555 1040 580">Cor. is located on an E. facing slope.</p> <p data-bbox="435 607 1409 658">Thence N. 22°21'20" W., on line 1-2, Mineral Survey No. 1864, Chicago lode.</p>
2.589	<p data-bbox="435 685 1398 762">Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 34, hereinbefore described, bears N. 89°40'50" E., 5.124 chs. dist.</p>
23.993	<p data-bbox="435 793 1463 897">Cor. No. 2, Mineral Survey No. 1864, Chicago lode, determined at record angle and distance from Cor. No. 3, Mineral Survey No. 1864, Chicago lode; there is no remaining evidence of the original corner.</p> <p data-bbox="435 922 1430 973">Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole on rock face, encased in concrete, with top mkd.</p> <div data-bbox="857 1000 1065 1176"> </div> <div data-bbox="881 1120 987 1172"> <p>T24S R58E</p> </div> <div data-bbox="922 1210 987 1234"> <p>2010</p> </div>
9.091	<p data-bbox="435 1297 1409 1348">Thence S. 87°38'40" W., on line 2-3, Mineral Survey No. 1864, Chicago lode.</p> <p data-bbox="435 1373 1463 1508">Cor. No. 3, Mineral Survey No. 1864, Chicago lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 12 ins. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p data-bbox="435 1533 743 1558">At the corner point</p> <p data-bbox="435 1585 1446 1688">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1864,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="808 261 1068 468"> <p>T24S R58E S34</p>  <p>2010</p> </div> <p>Deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 22°21'20" E., on line 3-4, Mineral Survey No. 1864, Chicago lode.</p> <p>21.056 Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 34, hereinbefore described, bears N. 89°40'50" E., 14.340 chs. dist.</p> <p>23.993 Cor. No. 4, Mineral Survey No. 1864, Chicago lode, monumented with a cedar post, 4 ins. diam., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with illegible scribe marks, with a mound of stone, 3 ft. diam., 3 ft. high, W. of cor. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div data-bbox="883 1127 1088 1363">  <p>T25S R58E S 3</p> <p>2010</p> </div> <p>Deposit the cedar post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence N. 87°38'40" E., on line 4-1, Mineral Survey No. 1864, Chicago lode.</p> <p>9.091 Cor. No. 1, Mineral Survey No. 1864, Chicago lode, and point of beginning.</p> <hr/>
--------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1867,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reestablishment of Portions of the Survey Executed by U.S. Deputy Mineral Surveyor H.W. Newby in 1899</p>
	<p style="text-align: center;">Porphyryna lode</p> <p>From Cor. No. 2, Mineral Survey No. 1867, Porphyryna lode, monumented with a cedar post, 4 ins. square, 5 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit the cedar post, inverted, alongside the stainless steel post.</p> <p>Thence S. 10°29'40" E., on line 2-3, Mineral Survey No. 1867, Porphyryna lode.</p> <p>3.849 Intersect line 4-1, Mineral Survey No. 1715, Clementina lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 43°58'10" E., 0.556 chs. dist.</p> <p>16.227 Cor. No. 3, Mineral Survey No. 1867, Porphyryna lode, identical with Cor. No. 6, Mineral Survey No. 1861, May lode, hereinbefore described.</p> <hr/> <p>From Cor. No. 4, Mineral Survey No. 1867, Porphyryna lode identical with Cor. No. 5, Mineral Survey No. 1861, May lode, on line 2-3, Mineral Survey No. 1861, Desty lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 1867,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

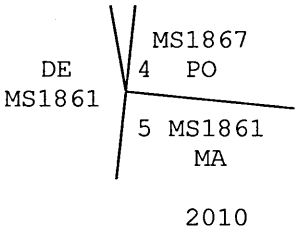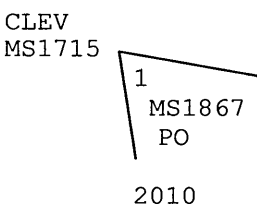CHAINS	
	
	<p>Cor. is located on the top of a ridge, bears N. and S.</p> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Thence N. 8°50'20" W., on line 4-1, Mineral Survey No. 1867, Porphyryna lode.</p>
1.890	<p>Intersect line 1-2, Mineral Survey No. 1861, Desty lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 89°04'50" E., 0.604 chs. dist.</p>
10.695	<p>Intersect line 7-8, Mineral Survey No. 1715, Cleveland lode, at a point from which Cor. No. 7, hereinbefore described, bears S. 44°06'30" W., 1.221 chs. dist.</p>
15.944	<p>Cor. No. 1, Mineral Survey No. 1867, Porphyryna lode, monumented with a cedar post, 4 ins. square, 5 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	 <p>Deposit cedar wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on SE. slope.</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1921,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

Reestablishment of the Survey Executed by  
U.S. Deputy Mineral Surveyor H.W. Newby in 1900,  
and the Retracement and Partial Resurvey Executed by  
U.S. Surveyor C.S. Swanholm in 1932

## Cresstone lode

From Cor. No. 1, Mineral Survey No. 1921, Cresstone lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, with aluminum cap, 1 1/2 ins. diam., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. GIVANT PLS 14348, with a wood post, 4 ins. square, 2 ft. long, no marks visible, lying loose alongside, as recorded in Clark County, Nevada, File 168, Page 35 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.

T24S R58E

S31

1  
CR  
MS1921

2010

Insert the rebar inside and deposit the wood post, inverted, alongside the stainless steel post.

Cor. is located on a NE. slope, 0.75 chs. W. of a gulch, 8 lks. wide, drains N.

Thence S. 51°37'40" E., on line 1-2, Mineral Survey No. 1921, Cresstone lode.

8.119 Cor. No. 2, Mineral Survey No. 1921, Cresstone lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, with aluminum cap, 1 1/2 ins. diam., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. GIVANT PLS 14348, with the remains of a wood post, 4 ins. square, 2 ft. long, mkd. 1921-2, lying loose on the mound, as recorded in Clark County, Nevada, File 168, Page 35 of Surveys.


At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1921,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS



Insert the rebar inside and deposit the mkd. wood post, inverted, alongside the stainless steel post.

Cor. is located on a NW. slope, 1.10 chs. E. of a gulch, drains N.

---


Thence S. 38°37'30" W., on line 2-3, Mineral Survey No. 1921, Cresstone lode.

15.583

Cor. No. 3, Mineral Survey No. 1921, Cresstone lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, with illegible scribe marks, as recorded in the Clark County, Nevada, File 168, Page 35 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.



Deposit the wood post, inverted, alongside the stainless steel post.

Cor. is located on a S. facing slope.

---

Thence N. 52°07'10" W., on line 3-4, Mineral Survey No. 1921, Cresstone lode.

6.586


Cor. No. 4, Mineral Survey No. 1921, Cresstone lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 2 ft. high, mkd. 1921-4, as recorded in Clark County, Nevada, File 168, Page 35 of Surveys.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 1921,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 445 1063 611"> <p>T24S R58E S31</p> <p>CR 4 MS1921</p> <p>2010</p> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a S. facing slope.</p> <hr/> <p>Thence N. 33°01'20" E., on line 4-1, Mineral Survey No. 1921, Cresstone lode.</p>
15.708	<p>Cor. No. 1, Mineral Survey No. 1921, Cresstone lode, and point of beginning.</p> <hr/> <p>DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2110, TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Mineral Surveyor H.K. Wheeler in 1903</p> <hr/> <p>What Not lode</p> <p>From Cor. No. 4, Mineral Survey No. 2110, Empire lode, on line 1-2, Mineral Survey No. 2110, What Not lode.</p> <p>Thence S. 33°40'40" E., on a portion of line 1-2, Mineral Survey No. 2110, What Not lode.</p>
0.70	<p>Ravine, drains SW.</p>
5.838	<p>Cor. No. 2, Mineral Survey No. 2110, What Not lode, on line 1-2, Mineral Survey No. 4543, Yellow Horse lode, monumented with a pine post, 4 ins. square, 2 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, no mks. visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2110,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS




Deposit the wood post, inverted, alongside the stainless steel post.

Empire lode

From Cor. No. 1, Mineral Survey No. 2110, Empire lode, identical with Cor. No. 1, Mineral Survey No. 2110, Bellevue lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 1/2 ft. diam., 1 ft. high, mkd. E-1-B-1-2110.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 11 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.



Deposit the mkd. wood post, inverted, alongside the stainless steel post.

Thence S. 46°43'40" E., on line 1-2, Mineral Survey No. 2110, Empire lode.



4.994 Intersect the line bet. secs. 19 and 30, at a point from which the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described, bears N. 83°36'00" W., 5.419 chs. dist.

20.087 Cor. No. 2, Mineral Survey No. 2110, Empire lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. E-2-2110.

At the corner point


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2110,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

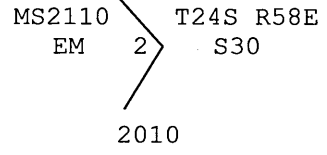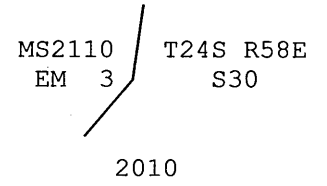CHAINS	
	<div data-bbox="812 279 1136 435">  </div> <p data-bbox="438 455 1412 518">Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <hr data-bbox="690 528 1218 538"/> <p data-bbox="438 559 1412 621">Thence S. 18°35'00" W., on line 2-3, Mineral Survey No. 2110, Empire lode.</p> <p data-bbox="300 642 1461 725">4.541 Cor. No. 3, Mineral Survey No. 2110, Empire lode, monumented with a wood post, 4 ins. square, 2 1/2 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, mkd. E-3-2110.</p> <p data-bbox="438 745 747 777">At the corner point</p> <p data-bbox="438 797 1445 911">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<div data-bbox="812 932 1136 1118">  </div> <p data-bbox="438 1139 1412 1201">Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <hr data-bbox="690 1212 1218 1222"/> <p data-bbox="438 1243 1412 1305">Thence, S. 50°57'10" W., on line 3-4, Mineral Survey No. 2110, Empire lode.</p> <p data-bbox="300 1326 1429 1491">4.099 Cor. No. 4, Mineral Survey No. 2110, Empire lode, on line 1-2, Mineral Survey No. 2110, What Not lode, monumented with a pine post, 4 ins. square, 2 1/2 ft. long, firmly set in a mound of stone, 2 ft. diam., 1 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p data-bbox="438 1512 747 1543">At the corner point</p> <p data-bbox="438 1564 1429 1657">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 2 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 2110,  
TPS. 24 S., RS. 57 AND 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS



2010

Deposit the pine post, inverted, alongside the stainless steel post.

## Bellevue lode

From Cor. No. 6, Mineral Survey No. 2110, Bellevue lode, determined at the center of a mound of stone, 4 ft. diam., 1 1/2 ft. high, with a wood post, 4 ins. square, 2 1/2 ft. long, no marks visible, lying loose on mound. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T24S R57E  
S24



2010


Reset wood post alongside stainless steel post.

Thence S. 37°46'00" E., on line 6-1, Mineral Survey No. 2110, Bellevue lode.

19.791 Intersect the line bet. secs. 19 and 24, on the W. bdy. of the Tp., at a point from which the cor. of secs. 19, 24, 25 and 30, hereinbefore described, bears S. 0°39'20" E., 5.153 chs. dist.

22.744 Cor. No. 1, Mineral Survey No. 2110, Bellevue lode, identical with Cor. No. 1, Mineral Survey No. 2110, Empire lode.


DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

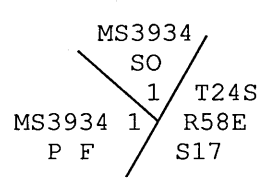CHAINS	<p>Reestablishment of Portions of the Survey Executed by U.S. Mineral Surveyor W.M. Brown in 1911</p>
	<p style="text-align: center;">Prairie Flower lode</p> <p>From Cor. No. 1, Mineral Survey No. 3934, Prairie Flower lode, identical with Cor. No. 1, Mineral Survey No. 3934, Solio lode, monumented with a partially burnt wood post, 4 ins. square, 5 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>MS3934 SO 1 T24S MS3934 1 P F R58E S17</p> </div> <p style="text-align: center;">2010</p> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 33°44'20" W., on line 1-2, Mineral Survey No. 3934, Prairie Flower lode.</p> <p>1.226 Intersect line 4-1, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 1, bears S. 3°30'00" W., 0.878 chs. dist.</p> <p>2.242 Intersect line 1-2, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 1, bears S. 86°30'50" E., 0.512 chs. dist.</p> <p>5.60 Top of hill.</p> <p>7.067 Intersect the line bet. secs. 17 and 20, at a point from which the cor. of secs. 16, 17, 20 and 21, hereinbefore described, bears N. 87°05'10" E., 12.525 chs. dist.</p> <p>19.80 Dirt road, 10 lks. wide, bears N. 70° W. and S. 70° E.</p> <p>22.701 Cor. No. 2, Mineral Survey No. 3934, Prairie Flower lode, identical with Cor. No. 1, Mineral Survey No. 4147, Como lode, and the westerly angle corner of Bedelia lode (unsurveyed), monumented with a wood post, 4 ins. square, 1 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 1/2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010

Deposit the wood post alongside the stainless steel post.

## Solio lode

From Cor. No. 6, Mineral Survey No. 3934, West Prairie Flower lode, on line 2-3 Mineral Survey No. 3934, Solio lode.

Thence N. 32°13'00" E., on a portion of line 2-3, Mineral Survey No. 3934, Solio lode.


15.205

Cor. No. 3, Mineral Survey No. 3934, Solio lode, monumented with a partially burnt wood post, 4 ins. square, 12 ins. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

T24S R58E  
S17



2010

Deposit the wood post alongside the stainless steel post.

Thence S. 58°41'50" E., on line 3-4, Mineral Survey No. 3934, Solio lode.

6.527


Intersect the line bet. secs. 16 and 17, at a point from which the 1/4 sec. cor. of secs. 16 and 17, hereinbefore described, bears N. 0°30'40" E., 18.331 chs. dist.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
8.631	<p>Cor. No. 4, Mineral Survey No. 3934, Solio lode, monumented with a partially burnt wood post, 4 ins. square, 12 ins. long, firmly set in a mound of stone, 2 1/2 ft. diam., 18 ins. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 590 1136 808"> </div> <p>2010</p> <p>Deposit the wood post alongside the stainless steel post.</p> <hr/> <p>Thence S. 32°13'20" W., on line 4-1, Mineral Survey No. 3934, Solio lode.</p>
3.439	<p>Intersect the line bet. secs. 16 and 17, at a point from which the cor. of secs. 16, 17, 20 and 21, hereinbefore described, bears S. 0°30'40" W., 19.130 chs. dist.</p>
7.80	<p>Dirt road, 10 lks. wide, bears E. and W.</p>
19.856	<p>Cor. No. 1, Mineral Survey No. 3934, Solio lode, identical with Cor. No. 1, Mineral Survey No. 3934, Prairie Flower lode.</p> <hr/> <p style="text-align: center;">West Prairie Flower lode</p> <p>From Cor. No. 4, Mineral Survey No. 3934, West Prairie Flower lode, determined from the remains of a wood post, in the center of a mound of stone, 5 ft. diam., 2 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="901 1626 1104 1813"> </div> <p>2010</p>



DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the wood post remains, inverted, alongside the stainless steel post.</p> <p>Thence N. <math>31^{\circ}59'10''</math> E., on line 4-5, Mineral Survey No. 3934, West Prairie Flower lode.</p>
0.107	<p>Intersect line 3-4, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which, Cor. No. 3, bears N. <math>86^{\circ}26'40''</math> W., 7.485 chs. dist.</p>
1.682	<p>Intersect line 4-1, Mineral Survey No. 4552, Pocohontas lode, identical with the W. side line of Pocohontas No. 2 lode (unsurveyed), at a point from which Cor. No. 1, Pocohontas lode, identical with the S.W. Cor. of Pocohontas No. 2 lode, (unsurveyed), hereinafter described, bears S. <math>19^{\circ}11'20''</math> W., 2.550 chs. dist.</p>
4.642	<p>Cor. No. 5, Mineral Survey No. 3934, West Prairie Flower lode, determined at the center of a mound of stone, 3 ft. diam., 1 ft. high, with a partially burnt wood post, 4 ins. square, no marks visible, lying loose on top of mound. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E</p>  <p>2010</p> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. <math>66^{\circ}31'00''</math> E., on line 5-6, Mineral Survey No. 3934, West Prairie Flower lode.</p>
7.294	<p>Intersect the E. side line of Pocohontas No. 2 lode (unsurveyed), at a point from which the S.E. Cor. of Pocohontas No. 2 lode (unsurveyed), hereinafter described, bears S. <math>13^{\circ}42'50''</math> W., 1.255 chs. dist.</p>
8.818	<p>Cor. No. 6, Mineral Survey No. 3934, West Prairie Flower lode, on line 2-3, Mineral Survey No. 3934, Solio lode, monumented with the remains of a partially burnt wood post, 4 ins. square, 2 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, with illegible scribe marks. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 357 1079 541"> <p>T24S R58E S17 MS 3934 MS 3934 SO W P F</p> </div> <p>2010</p> <p>Deposit the wood post alongside the stainless steel post.</p> <hr/> <p>Yellow Pine Extension lode</p> <p>From Cor. No. 1, Mineral Survey No. 3934, Yellow Pine Extension lode, determined from the remains of a wood post, 4 ins. square, 2 1/2 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 1083 1096 1205"> <p>MS3934 Y P E 1 T24S R58E S17</p> </div> <p>2010</p> <p>Deposit the wood post alongside the stainless steel post.</p> <p>Thence N. 86°30'50" W., on line 1-2, Mineral Survey No. 3934, Yellow Pine Extension lode.</p> <p>0.512 Intersect line 1-2, Mineral Survey No. 3934, Prairie Flower lode, at a point from which Cor. No. 1, bears N. 33°44'20" E., 2.242 chs. dist.</p> <p>22.705 Cor. No. 2, Mineral Survey No. 3934, Yellow Pine Extension, monumented with a partially burnt wood post, 4 ins. square, 12 ins. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, no mark visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
--------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="829 285 1068 406"> <p>MS3934 Y P E MS4147 2 SC 2010</p> </div> <p>Deposit the wood post alongside the stainless steel post.</p> <hr/> <p>Thence N. 3°24'20" E., on line 2-3, Mineral Survey No. 3934, Yellow Pine Extension lode.</p> <p>1.220 Intersect line 4-1, Mineral Survey No. 4147, Scorpion lode, at a point from which Cor. No. 1, hereinafter described, bears S. 66°18'00" E., 3.437 chs. dist.</p> <p>9.083 Cor. No. 3, Mineral Survey No. 3934, Yellow Pine Extension lode, monumented with the remains of a partially burnt wood post, 4 ins. square, 18 ins. long, firmly set in a mound of stone, 5 ft. diam., 1 1/2 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="813 1127 1068 1272"> <p>T24S R58E S17 3 MS3934 Y P E 2010</p> </div> <p>Deposit the wood post remains alongside the stainless steel post.</p> <hr/> <p>Thence S. 86°26'40" E., on line 3-4, Mineral Survey No. 3934, Yellow Pine Extension lode.</p> <p>4.099 Intersect line 1-2, Mineral Survey No. 4552, Pocohontas lode, at a point from which Cor. No. 1, identical with the S.W. Cor. of Pocohontas No. 2 lode (unsurveyed), hereinafter described, bears S. 69°11'40" E., 3.611 chs. dist.</p> <p>7.485 Intersect line 4-5, Mineral Survey No. 3934, West Prairie Flower lode, at a point from which Cor. No. 4, bears S. 31°59'10" W., 0.107 chs. dist.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
7.847	Intersect line 4-1, Mineral Survey No. 4552, Pocohontas lode, identical with the W. side line of Pocohontas No. 2 lode (unsurveyed), at a point from which Cor. No. 1, identical with the S.W. Cor. of Pocohontas No. 2 lode (unsurveyed), hereinafter described, bears S. 19°11'20" W., 1.112 chs. dist.
14.543	Intersect the S. end line of Pocohontas No. 2 lode (unsurveyed), at a point from which the S.E. Cor. of Pocohontas No. 2 lode (unsurveyed), hereinafter described, bears N. 84°51'20" E., 1.758 chs. dist.
21.80	Dirt road, 10 lks. wide, bears N. 50° E. and S. 50° W.
22.720	Cor. No. 4, Mineral Survey No. 3934, Yellow Pine Extension lode, determined at the center of a mound of stone, 4 ft. diam., 1 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<div data-bbox="867 969 1094 1172" data-label="Diagram"> </div>
	Thence S. 3°30'00" W., on line 4-1, Mineral Survey No. 3934, Yellow Pine Extension lode.
8.178	Intersect line 1-2, Mineral Survey No. 3934, Prairie Flower lode, at a point from which Cor. No. 1, bears N. 33°44'20" E., 1.226 chs. dist.
9.056	Cor. No. 1, Mineral Survey No. 3934, Yellow Pine Extension lode, and place of beginning.
	<p>Pocohontas No. 2 lode (unsurveyed)</p> <p>From the intersection of the E. side line of Pocohontas No. 2 lode (unsurveyed), and line 5-6, Mineral Survey No. 3934, West Prairie Flower lode.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p>From this point, the N.E. Cor. of Pocohontas No. 2 lode (unsurveyed), bears N. <math>13^{\circ}42'50''</math> E., 20.163 chs. dist., determined at the center of a mound of stone, 3 ft. diam., 1 ft. high, with the burnt portion of a wood post, 4 ins. square, and a spike nail set by person(s) unknown, recovered from the mound. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the corner shown on the official plat of Mineral Survey No. 3934, approved September 21, 1910.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="860 704 1063 818"> </div> <p>From this same point, Cor. No. 6, Mineral Survey No. 3934, West Prairie Flower lode, bears S. <math>66^{\circ}31'00''</math> E., 1.524 chs. dist.</p> <p>Thence, S. <math>13^{\circ}42'50''</math> W., on the E. side line of Pocohontas No. 2 lode (unsurveyed).</p> <p>1.255 The S.E. Cor. of Pocohontas No. 2 lode (unsurveyed), determined at the center of a mound of stone, 3 ft. diam., 1 ft. high, with the burned remains of a wood post, 3x3 ins., 16 ins. long, lying loose alongside. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the corner as shown on the official plat of Mineral Survey No. 3934, approved September 21, 1910.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <div data-bbox="812 1408 1120 1543"> </div> <p>Deposit remains of wood post alongside stainless steel post.</p> <p>Thence, S. <math>84^{\circ}51'20''</math> W., on the S. end line of Pocohontas No. 2 lode (unsurveyed).</p> <p>1.758 Intersect line 3-4, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 4, bears S. <math>86^{\circ}26'40''</math> E., 8.177 chs. dist.</p>
---------------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 3934,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

8.835

The S.W. Cor. of Pocohontas No. 2 lode (unsurveyed), identical with Cor. No. 1, Mineral Survey No. 4552, Pocohontas lode, hereinafter described.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


Reestablishment of the Portions of the Survey Executed by  
U.S. Mineral Surveyor C.E. McCarthy in 1913

Rover lode

From Cor. No. 4, Mineral Survey No. 4147, Rover lode, identical with Cor. No. 1, Mineral Survey No. 4147, Bybee lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 4 ft. high, mkd. 4-4147 R 1-4147 B.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.



2011

Deposit the mkd. wood post, inverted, alongside the stainless steel post.

Thence S. 66°36'30" E., on line 4-1, Mineral Survey No. 4147, Rover lode.

6.116

Intersect the southwesterly end line of Bedelia lode (unsurveyed), at a point from which the S.W. Cor. of Bedelia lode, hereinafter described, bears N. 56°46'10" W., 1.343 chs. dist.

6.978


Intersect line 1-2, Mineral Survey No. 4147, Como Lode, at a point from which Cor. No. 2, bears S. 32°02'30" W., 1.016 chs. dist.

9.077

Cor. No. 1, Mineral Survey No. 4147, Rover lode, monumented with a partially burnt wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 1-4147.

At the corner point

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>MS 4147 RO</p> <p>1</p> <p>T24S R58E S20</p> </div> <p>2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 23°25'50" W., on line 1-2, Mineral Survey No. 4147, Rover lode.</p> <p>0.513 Intersect the southwesterly end line of Bedelia lode (unsurveyed), at a point from which the S.W. Cor. of Bedelia lode (unsurveyed), hereinafter described, bears N. 56°46'10" W., 4.348 chs. dist.</p> <p>1.265 Intersect line 7-8, Mineral Survey No. 1855, Copper Glance lode, at a point from which Cor. No. 7, hereinbefore described, bears S. 73°49'20" W., 1.441 chs. dist.</p> <p>3.925 Intersect line 6-7, Mineral Survey No. 1855, Copper Glance lode, at a point from which Cor. No. 7, hereinbefore described, bears N. 9°05'40" W., 2.065 chs. dist.</p> <p>12.860 Intersect the northerly side line of Allic lode (unsurveyed), at a point from which the N.W. Cor. of Allic lode (unsurveyed), hereinafter described, bears S. 75°01'00" W., 2.421 chs. dist.</p> <p>16.762 Intersect the westerly end line of Allic lode (unsurveyed), at a point from which the N.W. Cor. of Allic lode (unsurveyed), hereinafter described, bears N. 14°55'20" W., 3.057 chs. dist.</p> <p>18.598 Intersect the northerly end line of Alice No. 1 lode (unsurveyed), at a point from which the N.E. Cor. of Alice No. 1 lode (unsurveyed), hereinafter described, bears S. 78°55'20" E., 0.698 chs. dist.</p> <p>22.708 Cor. No. 2, Mineral Survey No. 4147, Rover lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 1/2 ft. high, mkd. RO 2-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="873 254 1019 379"> </div> <div data-bbox="938 404 1084 457"> <p>T24S R58E S20</p> </div> <div data-bbox="922 491 987 518"> <p>2010</p> </div> <p data-bbox="435 547 1398 600">Deposit the mkd. wood post, inverted alongside the stainless steel post.</p> <hr/> <p data-bbox="435 654 1463 708">Thence N. 66°37'30" W., on a portion of line 2-3, Mineral Survey No. 4147, Rover lode.</p>
4.536	<p data-bbox="435 733 1295 760">Cor. No. 1, Mineral Survey No. 4147, Big Chimney lode.</p> <hr/> <p data-bbox="846 820 1057 847">Capitano lode</p> <p data-bbox="435 874 1414 928">From Cor. No. 4, Mineral Survey No. 4147, Tail Ender lode, on line 2-3, Mineral Survey No. 4147, Capitano lode.</p> <p data-bbox="435 953 1463 1006">Thence N. 66°44'00" W., on a portion of line 2-3, Mineral Survey No. 4147, Capitano lode.</p>
0.242	<p data-bbox="435 1033 1458 1112">Cor. No. 3, Mineral Survey No. 4147, Capitano lode, monumented with a wood post, 4 ins. square, firmly set in a mound of stone, 4 ft. diam., 2 1/2 ft. high, mkd. CA-3-4147.</p> <p data-bbox="435 1137 740 1164">At the corner point</p> <p data-bbox="435 1189 1446 1292">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 6 ft. base, to top, with brass cap mkd.</p>
	<div data-bbox="883 1307 1110 1411"> </div> <div data-bbox="922 1444 987 1471"> <p>2010</p> </div> <p data-bbox="435 1500 1409 1554">Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <hr/> <p data-bbox="435 1607 1406 1661">Thence N. 23°28'00" E., on line 3-4, Mineral Survey No. 4147, Capitano lode.</p>
16.60	<p data-bbox="435 1684 721 1711">Ravine, drains SE.</p>
20.90	<p data-bbox="435 1738 1117 1765">Top of ridge, bears N. 70° W. and S. 70° E.</p>




DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS  
22.713

Cor. No. 4, Mineral Survey No. 4147, Capitano lode, on line 1-2, Mineral Survey No. 4147, Queen lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of earth and stone, 4 ft. diam., 2 ft. high, mkd. 4-4147.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.



2010

Deposit the mkd. wood post, inverted, alongside the stainless steel post.


Cor. is located on a N. facing slope.

Tail Ender lode

From Cor. No. 3, Mineral Survey No. 4147, Tail Ender lode, identical with Cor. No. 4, Mineral Survey No. 4147, Iron Mountain lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 1/2 ft. diam., 2 ft. high, mkd. TE 3-4147 IM 4-4147.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010

Deposit the mkd. wood post, inverted, alongside the stainless steel post.

Cor. is located on N. facing slope.

Thence N. 31°53'40" E., on line 3-4, Mineral Survey No. 4147, Tail Ender lode.

4.20

Gulch, 75 lks. wide, drains S. 60° W.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

9.177

Cor. No. 4, Mineral Survey No. 4147, Tail Ender lode, on line 2-3, Mineral Survey No. 4147, Capitano lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 1/2 ft. diam., 2 ft. high, mkd. E-4-4147.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 1/2 ft. base, to top, with brass cap mkd.



Deposit the mkd. wood post, inverted, alongside the stainless steel post.


Cor. is located on S. facing slope.

Iron Mountain lode

From Cor. No. 2, Mineral Survey No. 4147, Iron Mountain lode, on line 3-4, Mineral Survey No. 4147, Big Chimney lode, determined at the center of a mound of stone, 3 1/2 ft. diam., 2 ft. high, with the remains of a wood post, 4 ins. square, 2 ft. long, mkd. IM 2-4147, lying loose alongside. This is accepted as the best available evidence of the position of the original corner.

At the corner point


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.





Deposit the mkd. wood post remains alongside the stainless steel post.

Cor. is located on SE. facing slope, on the edge of a small gulch.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 66°34'10" W., on line 2-3, Mineral Survey No. 4147, Iron Mountain lode.
15.50	Gulch, 20 lks. wide, drains N. 40° E.
22.706	<p>Cor. No. 3, Mineral Survey No. 4147, Iron Mountain lode, determined at the center of a mound of stone, 3 ft. diam., 1 1/2 ft. high, with a wood post, 4 ins. square, 3 ft. long, mkd. IM 3-4147, lying loose alongside. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>T24S R58E S20</p> <p>MS4147 3 I M</p> <p>2010</p> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a SW. facing slope.</p>
9.187	<p>Thence N. 31°53'40" E., on line 3-4, Mineral Survey No. 4147, Iron Mountain lode.</p> <p>Cor. No. 4, Mineral Survey No. 4147, Iron Mountain lode, identical with Cor. No. 3, Mineral Survey No. 4147, Tail Ender lode.</p> <hr/> <p style="text-align: center;">Big Chimney lode</p> <p>From Cor. No. 4, Mineral Survey No. 4147, Big Chimney lode, on line 1-2, Mineral Survey No. 4147, Tail Ender lode, monumented with a wood post, 4 ins. square, 3 ft. long, firmly set, projecting 24 ins. above a mound of stone, 3 ft. diam., 1 ft. high, mkd. BC-4-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

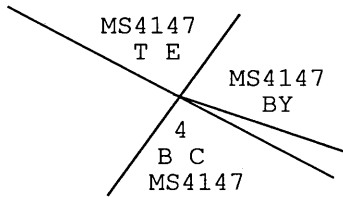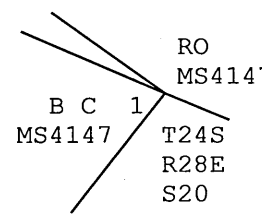CHAINS	
	 <p style="text-align: center;">2019</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 63°20'10" E., on line 4-1, Mineral Survey No. 4147, Big Chimney lode.</p> <p>4.663 The point for the intersection of the westerly side line of Alice No. 1 lode (unsurveyed), and line 4-1, Mineral Survey No. 4147, Big Chimney lode, hereinafter described.</p> <p>9.066 Cor. No. 1, Mineral Survey No. 4147, Big Chimney lode, on line 2-3, Mineral Survey No. 4147, Rover lode, monumented with a wood post, 4 ins. square, 3 ft. long, firmly set in a mound of stone, 4 ft. diam., 3 ft. high, mkd. BC 1-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>  <p style="text-align: center;">2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 31°58'00" W., on line 1-2, Mineral Survey No. 4147, Big Chimney lode.</p> <p>6.70 Wash, 10 lks. wide, drains N. 10° W.</p> <p>12.40 Wash, 10 lks. wide, drains N. 50° E.</p> <p>17.226 Cor. No. 2, Mineral Survey No. 4147, Big Chimney lode, determined at the center of a mound of stone, 3 1/2 ft. diam., 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 ft. base, to top, with brass cap mkd.</p> <div data-bbox="857 430 1031 534"> <p>MS4147 B C 2</p> </div> <p>T24S R58E S20</p> <p>2010</p> <hr/> <p>Thence N. 63°15'40" W., on line 2-3, Mineral Survey No. 4147, Big Chimney lode.</p> <p>9.065 Cor. No. 3, Mineral Survey No. 4147, Big Chimney lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 1/2 ft. diam., 2 ft. high, mkd. BC 3-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="857 1098 1079 1218"> <p>T24S R58E S20 MS4147 3 B C</p> </div> <p>2010</p> <p>Deposit mkd. wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence N. 31°51'00" E., on a portion of line 3-4, Mineral Survey No. 4147, Big Chimney lode.</p> <p>0.213 Cor. No. 2, Mineral Survey No. 4147, Iron Mountain lode.</p> <hr/> <p>Como lode</p> <p>From Cor. No. 1, Mineral Survey No. 4147, Como lode, identical with Cor. No. 2, Mineral Survey No. 3934, Prairie Flower lode, and the westerly angle corner of Bedelia lode (unsurveyed).</p> <p>Thence S. 32°02'30" W., on line 1-2, Mineral Survey No. 4147, Como lode.</p> <p>1.50 Gulch, 30 lks. wide, drains N. 10° E.</p>
--------	---


DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
10.649	Intersect line 4-1, Mineral Survey No. 4147, Rover lode, at a point from which Cor. No. 1, bears S. $66^{\circ}36'30''$ E., 2.099 chs. dist.
10.796	Intersect the southerly end line, Bedelia lode (unsurveyed), at a point from which the S.W. Cor. of Bedelia lode (unsurveyed), hereinafter described, bears N. $56^{\circ}46'10''$ W., 2.195 chs. dist.
11.665	<p>Cor. No. 2, Mineral Survey No. 4147, Como lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. COM 2-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="824 752 1039 984" data-label="Diagram"> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p>
	<p>Scorpion lode</p> <p>From Cor. No. 1, Mineral Survey No. 4147, Consort lode, on line 3-4, Mineral Survey No. 4147, Scorpion lode.</p> <p>Thence N. <math>33^{\circ}12'10''</math> E., on a portion of line 3-4, Mineral Survey No. 4147, Scorpion lode.</p>
0.015	<p>Cor. No. 4, Mineral Survey No. 4147, Scorpion lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 1/2 ft. high, mkd. 4-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="881 1622 1032 1854" data-label="Diagram"> </div>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the mkd. wood post, inverted, alongside stainless steel post.</p> <hr/> <p>Thence S. 66°18'00" E. on line 4-1, Mineral Survey No. 4147, Scorpion lode.</p> <p>5.663 Intersect line 2-3, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 2, hereinbefore described, bears S. 3°24'20" W., 1.220 chs. dist.</p> <p>9.100 Cor. No. 1, Mineral Survey No. 4147, Scorpion lode, determined at the center of a mound of stone, 5 ft. diam., 18 ins. high, with the burnt remains of a wood post, 4 ins. square, 12 ins. long, with illegible scribe marks, lying loose alongside mound. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="803 880 1079 1056" data-label="Diagram"> <p>Y P E MS3934 MS4147 1 W P F SC 2010</p> </div> <p>Deposit the remains of the wood post alongside the stainless steel post.</p> <hr/> <p>Consort lode</p> <p>From Cor. No. 3, Mineral Survey No. 4147, Consort lode, on line 4-1, Mineral Survey No. 4147, Queen lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 1/2 ft. diam., 2 1/2 ft. high, mkd. CON 3-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="820 1564 1063 1802" data-label="Diagram"> <p>T24S R58E S17 QU CO 3 MS4147 MS4147 2010</p> </div>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA



CHAINS	<p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Thence N. <math>33^{\circ}12'10''</math> E., on line 3-4, Mineral Survey No. 4147, Consort lode.</p>
9.20	Enter wash, drains E.
9.70	Leave wash.
15.50	Ridge, bears E. and W.
22.703	<p>Cor. No. 4, Mineral Survey No. 4147, Consort lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, mkd. CON 4-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E S17</p>  <p>2010</p> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a N. facing slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Thence S. <math>28^{\circ}38'00''</math> E., on line 4-1, Mineral Survey No. 4147, Consort lode.</p>
7.60	Top of hill.
10.357	<p>Cor. No. 1, Mineral Survey No. 4147, Consort lode, on line 3-4, Mineral Survey No. 4147, Scorpion lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 1/2 ft. high, mkd. CON 1-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>




DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="846 254 1122 457"> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Queen lode</p> <p>From Cor. No. 4, Mineral Survey No. 4147, Capitano lode, on line 1-2, Mineral Survey No. 4147, Queen lode.</p> <p>Thence N. 66°35'40" W., on a portion of line 1-2, Mineral Survey No. 4147, Queen lode.</p> <p>3.50 Gulch, 5 ft. wide, drains N. 70° E.</p> <p>6.044 Cor. No. 2, Mineral Survey No. 4147, Queen lode, monumented with a partially burnt wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 2-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="846 1166 1049 1379"> </div> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a SE. facing slope.</p> <hr/> <p>Thence N. 28°41'50" W., on line 2-3, Mineral Survey No. 4147, Queen lode.</p> <p>1.913 Intersect the line bet. secs. 17 and 20, at a point from which the cor. of secs. 17, 18, 19 and 20, hereinbefore described, bears S. 87°05'10" W., 17.279 chs. dist.</p> <p>12.20 Gulch, 40 lks. wide, drains N. 60° E.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p> <p>22.746</p>	<p>Cor. No. 3, Mineral Survey No. 4147, Queen lode, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 1/2 ft. high, mkd. Q 3-4147.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="812 559 1055 745"> <p>T24S R58E S17</p>  </div> <p>2010</p> <p>Deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a NE. facing slope.</p> <hr/> <p>Thence S. 66°55'50" E., on line 3-4, Mineral Survey No. 4147, Queen lode.</p> <p>7.10 Gulch, 25 lks. wide, drains N. 20° E.</p> <p>14.50 Westerly edge of wash, bears NE. and SW., drains NE.</p> <p>14.803 Cor. No. 4, Mineral Survey No. 4147, Queen lode, determined at the center of a mound of stone, 3 1/2 ft. diam., 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="860 1512 1088 1636"> <p>T24S R58E S17</p>  </div> <p>2010</p> <p>Cor. is located on the westerly edge of a gulch, drains NE.</p> <hr/> <p>Thence S. 28°14'30" E., on a portion of line 4-1, Mineral Survey No. 4147, Queen lode.</p>
-----------------------------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
12.00	Gulch, 40 lks. wide, drains NE.
12.391	Cor. No. 3, Mineral Survey No. 4147, Consort lode.
8.833	<p style="text-align: center;">Alice No. 1 lode (unsurveyed)</p> <p>From the intersection of the northerly end line of Alice No. 1 lode (unsurveyed), and line 1-2, Mineral Survey No. 4147, Rover lode.</p> <p>From this point, the N.E. Cor. of Alice No. 1 lode (unsurveyed), bears S. <math>78^{\circ}55'20''</math> E., 0.698 chs. dist., determined at the center of a mound of stone, 3 ft. diam., 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the corner shown on the official record of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 8 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;">  <p>ALICE NO 1</p> <p>2010</p> </div> <p>From this same point, Cor. No. 2, Mineral Survey No. 4147, Rover lode, hereinbefore described, bears S. <math>23^{\circ}25'50''</math> W., 4.110 chs. dist.</p> <p>Thence N. <math>78^{\circ}55'20''</math> W., on the northerly end line of Alice No. 1 lode (unsurveyed).</p> <p>The N.W. Cor. of Alice No. 1 lode (unsurveyed), determined at the center of a mound of stone, 3 ft. diam. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the corner as shown on the official plat of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 8 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<div data-bbox="792 254 1055 368" data-label="Diagram"> </div> <p>2010</p> <p>Thence S. 32°11'10" W., on the westerly side line of Alice No. 1 lode (unsurveyed).</p> <p>2.000 The point for the intersection of the westerly side line of Alice No. 1 lode (unsurveyed), and line 4-1, Mineral Survey No. 4147, Big Chimney lode, determined at proportionate dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="857 777 1112 948" data-label="Diagram"> </div> <p>2019</p> <p>From this point, Cor. No. 1, Mineral Survey No. 4147, Big Chimney lode, hereinbefore described, bears S. 63°20'10" E., 4.403 chs. dist.</p> <hr/> <p>Allic lode (unsurveyed)</p> <p>From the intersection of the northerly side line of Allic lode (unsurveyed), and line 1-2, Mineral Survey No. 4147, Rover lode.</p> <p>From this point, Cor. No. 6, Mineral Survey No. 1855, Copper Glance lode, on the northerly side line of Allic lode (unsurveyed), hereinbefore described, bears N. 75°01'00" E., 4.829 chs. dist.</p> <p>From this same point, Cor. No. 2, Mineral Survey No. 4147, Rover lode, hereinbefore described, bears S. 23°25'50" W., 9.848 chs. dist.</p> <p>Thence S. 75°01'00" W., on a portion of the northerly side line of Allic lode (unsurveyed).</p> <p>2.421 The N.W. Cor. of Allic lode (unsurveyed), determined at the center of a mound of stone, 3 ft. diam., 4 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the corner as shown on the official plat of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p>
---------------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="824 358 1084 534" data-label="Diagram"> </div> <p>Thence S. 14°55'20" E., on a portion of the westerly end line of Allic lode (unsurveyed).</p> <p>3.057 Intersect line 1-2, Mineral Survey No. 4147, Rover lode at a point from which Cor. No. 2, hereinbefore described, bears S. 23°25'50" W., 5.946 chs. dist.</p> <p>From this point of intersection, the S.W. Cor. of Allic lode (unsurveyed), bears S. 14°55'20" E., 6.033 chs. dist., determined at the center of a mound of stone, 3 ft. diam., 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the corner as shown on the official plat of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="889 1139 1023 1284" data-label="Diagram"> </div> <p>Bedelia lode (unsurveyed)</p> <p>From the westerly angle corner of Bedelia lode (unsurveyed), identical with Cor. No. 1, Mineral Survey No. 4147, Como lode, and Cor. No. 2, Mineral Survey No. 3934, Prairie Flower lode, hereinbefore described.</p> <p>Thence S. 43°34'30" W., on the westerly side line of Bedelia lode (unsurveyed).</p> <p>10.972 The S.W. Cor. of Bedelia lode (unsurveyed), determined at the center of a mound of stone, 3 ft. diam., 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the corner as shown on the official plat of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p>
--------	---

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4147,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="792 368 1088 538" data-label="Diagram"> <p>MS4147 CO</p> <p>T24S R58E S20</p> <p>2010</p> </div> <hr/> <p>Thence S. 56°46'10" E., on the southerly end line of Bedelia lode (unsurveyed).</p> <p>1.343 Intersect line 4-1, Mineral Survey No. 4147, Rover lode, at a point from which Cor. No. 1, hereinbefore described, bears S. 66°36'30" E., 2.961 chs. dist.</p> <p>2.195 Intersect line 1-2, Mineral Survey No. 4147, Como lode, at point from which Cor. No. 2, hereinbefore described, bears S. 32°02'30" W., 0.869 chs. dist.</p> <p>4.348 Intersect line 1-2, Mineral Survey No. 4147, Rover lode, at point from which Cor. No. 1, hereinbefore described, bears N. 23°25'50" E., 0.513 chs. dist.</p> <p>From this point of intersection, the S. Cor. of Bedelia lode (unsurveyed), bears S. 56°46'10" E., 4.746 chs. dist., monumented with a wood post, no marks visible, firmly set, in a mound of stone, 3 ft. diam. 2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the corner as shown on the official plat of Mineral Survey No. 4147, approved September 20, 1913.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 8 ft. base, to top, with brass cap mkd.</p> <div data-bbox="824 1408 1071 1585" data-label="Diagram"> <p>BEDELIA</p> <p>2010</p> </div> <hr/>
--------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reestablishment of Portions of the Survey Executed by U.S. Deputy Mineral Surveyor C.H. Fenner in 1918</p>
	<p style="text-align: center;">Middlesex lode</p> <p>From Cor. No. 3, Mineral Survey No. 4350, Tinto lode, on line 1-2, Mineral Survey No. 4350, Middlesex lode.</p> <p>Thence S. 28°49'00" E., on a portion of line 1-2, Mineral Survey No. 4350, Middlesex lode.</p> <p>5.141 Cor. No. 2, Mineral Survey No. 4350, Middlesex lode, perpetuated by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set in a mound of stone, 3 1/2 ft. diam., 2 ft. high, with aluminum cap, 2 ins. diam., no marks visible, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys, with a second unmarked rebar, 5/8 in. diam., 12 ins. long, firmly set alongside and a wood post, 4x6 ins., 4 ft. long, with illegible scribe marks, lying loose alongside the mound of stone. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="857 1067 1140 1253" data-label="Diagram"> </div> <p>Insert both rebars inside and deposit the wood post, inverted, alongside the stainless steel post.</p>
	<p>Thence S. 75°06'00" W., on a portion of line 2-3, Mineral Survey No. 4350, Middlesex lode.</p> <p>6.716 Intersect the line bet. secs. 20 and 21, at a point from which the 1/4 sec. cor. of secs. 20 and 21, hereinbefore described, bears N. 2°26'00" W., 17.232 chs. dist.</p>
	<p>8.453 Cor. No. 2, Mineral Survey No. 4350, Utica lode.</p> <hr/> <p>From Cor. No. 3, Mineral Survey No. 4350, Middlesex lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, with illegible scribe marks, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This is accepted as the best available evidence of the position of the original corner.</p>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA



CHAINS	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="867 443 1062 671"> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Thence N. 28°49'20" W., on line 3-4, Mineral Survey No. 4350, Middlesex lode.</p> <p>11.814 Intersect line 4-1, Mineral Survey No. 4350, Utica lode, at a point from which Cor. No. 1, bears N. 15°46'30" E., 1.251 chs. dist.</p> <p>22.517 Cor. No. 4, Mineral Survey No. 4350, Middlesex lode, on the south side line of Alice lode (unsurveyed), reestablished by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a rebar, 5/8 in. diam., 12 ins. long, firmly set, projecting 2 ins. above the ground, with aluminum cap, 2 ins. diam., mkd. W STOUT PLS 14420, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This is accepted as a careful and faithful reestablishment of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="786 1388 1062 1591"> </div> <p>Insert rebar inside the stainless steel post.</p> <p>Cor. is located on the E. edge of the bottom of a gulch, 25 lks. wide, drains N. 20° E.</p> <p>Thence N. 75°00'00" E., on a portion of line 4-1, Mineral Survey No. 4350, Middlesex lode, identical in part with a portion of the south side line of Alice lode (unsurveyed).</p>
--------	---



DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
2.922	<p>Cor. No. 4, Mineral Survey No. 4350, Telescope lode, identical with the S.E. cor. Alice lode (unsurveyed).</p> <hr/> <p style="text-align: center;">Tinto lode</p> <p>From Cor. No. 4, Mineral Survey No. 4350, Tinto lode, identical with Cor. No. 2, Mineral Survey No. 4350, Telescope lode, perpetuated by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set in a mound of stone, 2 ft. diam., 1/2 ft. high, with aluminum cap, 2 ins. diam., mkd. W STOUT PLS 14420, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="841 872 1096 1131" data-label="Diagram"> </div> <p>Insert rebar inside the stainless steel post.</p> <p>From this corner, Cor. No. 3, Mineral Survey No. 1855, Green Copper lode, hereinbefore described, bears N. 36°34' E., 0.053 chs. dist.</p> <p>Thence N. 81°04'40" E., on line 4-1, Mineral Survey No. 4350, Tinto lode.</p>
1.20	Dirt road, 15 lks. wide, bears N. and S.
5.855	Intersect the line bet. secs. 20 and 21, at a point from which the 1/4 sec. cor. of secs. 20 and 21, hereinbefore described, bears S. 2°26'00" E., 9.831 chs. dist.
9.040	<p>Cor. No. 1, Mineral Survey No. 4350, Tinto lode, determined at the center of a mound of stone, 3 ft. diam., 1 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>


DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="873 259 1058 497"> <p>T24S R58E S21</p>  <p>1 MS4350 TI</p> <p>2010</p> </div> <p>From this corner, Cor. No. 2, Mineral Survey No. 1855, Green Copper lode, hereinbefore described, bears N. 0°26' E., 0.032 chs. dist.</p> <hr/> <p>Thence S. 25°17'50" E., on line 1-2, Mineral Survey No. 4350, Tinto lode.</p> <p>22.275 Cor. No. 2, Mineral Survey No. 4350, Tinto lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with illegible scribe marks, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 1139 1144 1315"> <p>MS4350 TI</p>  <p>2 T24S R58E S21</p> <p>2010</p> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on top of ridge, bears N. 40° W. and S. 50° E.</p> <hr/> <p>Thence S. 81°12'40" W., on line 2-3, Mineral Survey No. 4350, Tinto lode.</p> <p>7.594 Cor. No. 3, Mineral Survey No. 4350, Tinto lode, on line 1-2, Mineral Survey No. 4350, Middlesex lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. 3-4350 TI, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys.</p> <p>At the corner point</p>
--------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.



2010


Deposit the mkd. wood post, inverted, alongside the stainless steel post.

## Utica lode

From Cor. No. 2, Mineral Survey No. 4350, Utica lode, on line 2-3, Mineral Survey No. 4350, Middlesex lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 ft. high, with illegible scribe marks, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.



2010

Deposit the wood post, inverted, alongside the stainless steel post.

Thence S. 15°47'20" W., on line 2-3, Mineral Survey No. 4350, Utica lode.

9.30

Gulch, 20 lks. wide, drains S. 50° W.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
17.143	<p>Cor. No. 3, Mineral Survey No. 4350, Utica lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with illegible scribe marks, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="876 704 1031 932"> <p>MS4350 UT 3 T24S R58E S20 2010</p> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence N. 28°51'50" W., on line 3-4, Mineral Survey No. 4350, Utica lode.</p>
4.20	Gulch, 10 lks. wide, drains S. 40° W.
12.907	<p>Cor. No. 4, Mineral Survey No. 4350, Utica lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 5 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high, no marks visible, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="755 1595 1079 1833"> <p>MS4350 4 UT T24S R58E S20 2010</p> </div>

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence N. 15°46'30" E., on line 4-1, Mineral Survey No. 4350, Utica lode.</p> <p>15.912 Intersect line 3-4, Mineral Survey No. 4350, Middlesex lode, at a point from which Cor. No. 4, bears N. 28°49'20" W., 10.703 chs. dist.</p> <p>17.163 Cor. No. 1, Mineral Survey No. 4350, Utica lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with a wood post, 4x6 ins., 5 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, no marks visible, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="852 963 1015 1170" data-label="Diagram"> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Telescope lode</p> <p>From Cor. No. 4, Mineral Survey No. 4350, Telescope lode, identical with the S.E. Cor. of Alice lode (unsurveyed), on line 4-1, Mineral Survey No. 4350, Middlesex lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, determined at the center of a mound of stone, 5 ft. diam., 2 ft. high, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
--------	--

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS



T24S MS4350  
R58E TE  
S20 4

MS4350  
MI

2010

Thence N.  $14^{\circ}45'20''$  W., on line 4-5, Mineral Survey No. 4350, Telescope lode, identical with the easterly end line of Alice lode (unsurveyed).


1.70 Gulch, 30 lks. wide, drains NE.

2.90 Dirt road, 15 lks. wide, bears N.  $20^{\circ}$  E. and S.  $30^{\circ}$  W.

9.115 Cor. No. 5, Mineral Survey No. 4350, Telescope lode, identical with the N.E. Cor. of Alice lode (unsurveyed), on line 5-6, Mineral Survey No. 1855, Copper Glance lode, recovered by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2012, monumented with the decomposed remains of a wood post in the center of a mound of stone, 4 ft. diam., 2 ft. high, as recorded in Clark County, Nevada, File 185, Page 82 of Surveys. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.

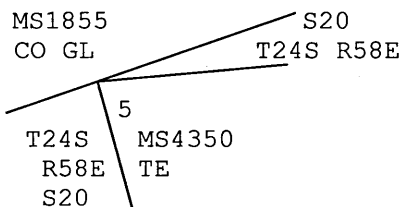

MS1855 S20  
CO GL T24S R58E  
5  
T24S MS4350  
R58E TE  
S20

2016

Thence N.  $75^{\circ}33'30''$  E., on line 5-1, Mineral Survey No. 4350, Telescope lode.

1.80 Gulch, 10 lks. wide, drains NE.

3.50 Dirt road, 15 lks. wide, bears N.  $10^{\circ}$  E. and S.  $10^{\circ}$  W.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4350,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

5.556

Cor. No. 1, Mineral Survey No. 4350, Telescope lode, determined at the center of a mound of stone, 4 ft. diam., 1 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.

T24S R58E  
S20

1  
MS4350  
TE



2010

From this corner, Cor. No. 5, Mineral Survey No. 1855, Copper Glance lode, hereinbefore described, bears N. 8°21' W., 0.064 chs. dist.

From this same cor., a rebar, 5/8 in. diam., firmly set flush with the ground, with aluminum cap, 2 ins. diam., mkd. W Stout PLS 14420, bears S. 10°12' E., 0.058 chs. dist., and is not utilized in the course this survey.

Thence S. 8°43'40" E., on line 1-2, Mineral Survey No. 4350, Telescope lode.

3.922

Cor. No. 2, Mineral Survey No. 4350, Telescope lode, identical with Cor. No. 4, Mineral Survey No. 4350, Tinto lode.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4543,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA



Reestablishment of a Portion of the Survey Executed by  
U.S. Mineral Surveyor F.W. Rodolf in 1922

Yellow Horse lode

From Cor. No. 2, Mineral Survey No. 2110, What Not lode, on line 1-2, Mineral Survey No. 4543, Yellow Horse lode, hereinbefore described.

Thence N. 23°36'10" E., on a portion of line 1-2, Mineral Survey No. 4543, Yellow Horse lode.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4543,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p> <p>2.850</p>	<p>Cor. No. 2, Mineral Survey No. 4543, Yellow Horse lode, monumented with a limestone, 20x10x8 ins., firmly set, projecting 8 ins. above the ground, mkd. 4543 YH-2 with an X on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div data-bbox="857 568 1052 801"> <p>T24S R58E S30</p>  <p>2010</p> </div> <p>Deposit the mkd. stone, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 43°28'50" E., on line 2-3, Mineral Survey No. 4543, Yellow Horse lode.</p>
<p>22.731</p>	<p>Cor. No. 3, Mineral Survey No. 4543, Yellow Horse lode, monumented with a limestone, 22x8x8 ins., firmly set in a mound of stone, mkd. YH 4543 on the SW. face, with an X on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="868 1297 1101 1502">  <p>2010</p> </div> <p>Deposit the mkd. stone, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 23°32'20" W., on line 3-4, Mineral Survey No. 4543, Yellow Horse lode.</p>
<p>4.70</p>	<p>Gulch, 40 lks. wide, drains S. 60° E.</p>



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4543,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


## CHAINS

9.863

Cor. No. 4, Mineral Survey No. 4543, Yellow Horse lode, identical with the southwest corner of Dolly and Daisy Banks lode (unsurveyed), monumented with a limestone, 24x20x17 ins. (Record, 24x20x10 ins.), firmly set in a mound of stone, 3 ft. base, 1 ft. high, mkd. YH 4543 on the NW. face, D DB on the NE. face, with an X on top.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.



S30  
T24S R58E

2010

Deposit the mkd. stone, inverted, alongside the stainless steel post.

Thence, N. 43°33'30" W., on a portion of line 4-1, Mineral Survey No. 4543, Yellow Horse lode.

5.982

Cor. No. 3, Mineral Survey No. 1715, Clementina lode, hereinbefore described.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4552,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

Reestablishment of the Survey Executed by  
U.S. Mineral Surveyor A.H. Black in 1922

Pocohontas lode


From Cor. No. 1, Mineral Survey No. 4552, Pocohontas lode, identical with the S.W. Cor. of Pocohontas No. 2 lode (unsurveyed), monumented with the remains of a wood post, 4 ins. square, 3 1/2 ft. long, firmly set in a mound of stone, 5 ft. diam., 2 ft. high, no marks visible, with a mound of stone, 4 ft. diam., 2 ft. high, alongside to the W. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4552,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to sold rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010

Deposit the wood post remains, inverted, alongside the stainless steel post.


Thence N. 69°11'40" W., on line 1-2, Mineral Survey No. 4552, Pocohontas lode.

3.611 Intersect line 3-4, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 86°26'40" W., 4.099 chs. dist.

9.041 Cor. No. 2, Mineral Survey No. 4552, Pocohontas lode, monumented with a wood post, 4 ins. square, 3 ft. long, firmly set in a mound of stone, 4 ft. diam., 3 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010



Deposit the wood post alongside the stainless steel post.

Thence N. 19°09'50" E., on line 2-3, Mineral Survey No. 4552, Pocohontas lode.

22.729 Cor. No. 3, Mineral Survey No. 4552, Pocohontas lode, monumented with the partially burnt remains of a wood post, 4 ins. square, 2 ft. long, firmly set in a mound of stone, 4 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.

At the corner point

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4552,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="885 362 1063 569"> <p>T24S R58E S17</p>  </div> <p>2010</p> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 69°12'40" E., on line 3-4, Mineral Survey No. 4552, Pocohontas lode.</p> <p>9.051 Cor. No. 4, Mineral Survey No. 4552, Pocohontas lode, monumented with the partially burnt remains of a wood post, 4 ins. square, 1 1/2 ft. long, firmly set in a mound of stone, 4 ft. diam., 1 ft. high, no marks visible. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 1191 1063 1315">  <p>T24S R58E S17</p> </div> <p>2010</p> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on the W. side of dirt road, 10 lks. wide, bears NNW. and SSE.</p> <hr/> <p>Thence S. 19°11'20" W., on line 4-1, Mineral Survey No. 4552, Pocohontas lode, identical with the W. side line of Pocohontas No. 2 lode (unsurveyed).</p> <p>8.50 Dirt road, 12 lks. wide, bears N. 15° W. and S. 15° E.</p> <p>20.182 Intersect line 4-5, Mineral Survey No. 3934, West Prairie Flower lode, at a point from which Cor. No. 4, hereinbefore described, bears S. 31°59'10" W., 1.682 chs. dist.</p>
--------	--

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4552,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS													
21.620	Intersect line 3-4, Mineral Survey No. 3934, Yellow Pine Extension lode, at a point from which Cor. No. 3, hereinbefore described, bears N. 86°26'40" W., 7.847 chs. dist.												
22.732	Cor. No. 1, Mineral Survey No. 4552, Pocohontas lode, identical with the S.W. Cor. of Pocohontas No. 2 lode (unsurveyed), and point of beginning.												
	DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4585, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA												
	Reestablishment of a Portion of the Survey Executed by U.S. Mineral Surveyor F.W. Rodolf in 1923												
	Lovena lode												
	From Cor. No. 1, Mineral Survey No. 4585, Lovena lode, on line 1-2, Mineral Survey No. 1859, Iron Gold lode, determined from a small depression with a wood post, 4 ins. square, 4 ft. long, lying loose alongside, mkd. 1-4585 LO. This is accepted as the best available evidence of the position of the original corner.												
	At the corner point												
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.												
	<table border="0"> <tr> <td>MS4585</td><td></td></tr> <tr> <td>LO</td><td></td></tr> <tr> <td>1</td><td>MS1859</td></tr> <tr> <td></td><td>I G</td></tr> <tr> <td>T24S R58E</td><td></td></tr> <tr> <td>S21</td><td></td></tr> </table>	MS4585		LO		1	MS1859		I G	T24S R58E		S21	
MS4585													
LO													
1	MS1859												
	I G												
T24S R58E													
S21													
	2010												
	Deposit the mkd. wood post, inverted, alongside the stainless steel post.												
	Thence S. 89°18'00" W., on line 1-2, Mineral Survey No. 4585, Lovena lode.												
9.060	Cor. No. 2, Mineral Survey No. 4585, Lovena lode, monumented with a limestone, 20x10x8 ins., firmly set in a mound of stone, 5 ft. diam., 2 ft. high, mkd. L-2-4585 with an X on top.												
	At the corner point												
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.												



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4585,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div data-bbox="938 282 1084 384"> <div>MS4585</div> <div>LO</div> <div>2</div> </div> <div data-bbox="813 400 959 455"> <div>T24S R58E</div> <div>S21</div> </div> <div data-bbox="927 488 992 517">2010</div> <p data-bbox="440 543 1446 598">Deposit the mkd. stone, inverted, alongside the stainless steel post.</p> <hr data-bbox="691 621 1219 629"/> <p data-bbox="440 649 1398 705">Thence N. 0°44'20" W., on line 2-3, Mineral Survey No. 4585, Lovena lode.</p>
22.722	<p data-bbox="440 727 1463 864">Cor. No. 3, Mineral Survey No. 4585, Lovena lode, monumented with a limestone, 24x10x8 ins., firmly set in a mound of stone, 3 ft. diam., 1 ft. high, mkd. L-3-4585 with an X on top, with a wood post, 4 ins. square, 4 ft. long, projecting 4 ft. above the ground, W. of cor.</p> <p data-bbox="440 885 740 913">At the corner point</p> <p data-bbox="440 936 1446 1038">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="813 1069 1052 1212"> <div>T24S R58E</div> <div>S21</div> <div> <div>3</div> <div>LO</div> <div>MS4585</div> </div> </div> <div data-bbox="927 1242 992 1271">2010</div> <p data-bbox="440 1293 1382 1349">Deposit mkd. stone, inverted, alongside the stainless steel post.</p> <hr data-bbox="691 1371 1219 1379"/> <p data-bbox="440 1402 1406 1457">Thence N. 89°17'50" E., on line 3-4, Mineral Survey No. 4585, Lovena lode.</p>
9.067	<p data-bbox="440 1477 1455 1559">Cor. No. 4, Mineral Survey No. 4585, Lovena lode, monumented with a limestone, 27x12x12 ins., firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, mkd. L-4-4585 with an X on top.</p> <p data-bbox="440 1580 740 1608">At the corner point</p> <p data-bbox="440 1631 1430 1712">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4585,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="873 261 1110 389"> <p>T24S R58E S21</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> LO 4 MS4585 </div> </div> <p style="text-align: center;">2016</p> <p>Deposit the mkd. stone, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 0°43'20" E., on a portion of line 4-1, Mineral Survey No. 4585, Lovenia lode.</p> <p>2.380 Cor. No. 2, Mineral Survey No. 1859, Iron Gold lode, hereinbefore described.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4587, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Mineral Surveyor F.W. Rodolf in 1924</p> <hr/> <p style="text-align: center;">Columbia lode</p> <p>From Cor. No. 4, Mineral Survey No. 4587, Columbia lode, identical with Cor. No. 3, cancelled Mineral Survey No. 4587, St. Anthony lode, on line 1-2, Mineral Survey No. 4587, St. Patrick lode, monumented with a limestone, 24x10x8 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. C-4-4587 ST A-4587 with an X on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="818 1375 1094 1520"> <p>T24S R58E S33</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> MS4587 ST PA </div> <div style="text-align: center;"> 4 CO </div> </div> </div> <p style="text-align: center;">2010</p> <p>Deposit the mkd. stone, inverted, alongside the stainless steel post.</p> <p>Cor. is located on ridge saddle, bears NW. and SE.</p> <p>Thence N. 53°44'50" E., on line 4-1, Mineral Survey No. 4587, Columbia lode, identical with line 2-3, cancelled Mineral Survey No. 4587, St. Anthony lode.</p> <p>9.40 Wash, drains N.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4587,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS	
9.60	Dirt road, 15 lks. wide, bears N. and S.
10.70	Dirt road, 15 lks. wide, bears N. and S.
22.727	<p>Cor. No. 1, Mineral Survey No. 4587, Columbia lode, identical with Cor. No. 2, cancelled Mineral Survey No. 4587, St. Anthony lode, monumented with a limestone in place, 24x14 ins., projecting 8 ins. above the ground (Record, 18x18x15 ins. above ground), mkd. with a chiseled X on the N. face and C-1 also chiseled to the south of the X, with a mound of stone, 3 ft. diam., 2 ft. high, N. of cor.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in face of stone left in place, encased in concrete, with top mkd.</p> <div data-bbox="860 756 1031 994"> <p>T24S R58E S33</p>  <p>2010</p> </div> <p>Thence S. 36°20'50" E., on line 1-2, Mineral Survey No. 4587, Columbia lode.</p>
9.096	<p>Cor. No. 2, Mineral Survey No. 4587, Columbia lode, monumented with a chiseled X and 4587 also chiseled to the west of the X, on a rock ledge.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in rock ledge, encased in concrete, with top mkd.</p> <div data-bbox="820 1367 1055 1554">  <p>2010</p> </div> <p>Thence S. 53°42'50" W., on line 2-3, Mineral Survey No. 4587, Columbia lode.</p>
22.733	<p>Cor. No. 3, Mineral Survey No. 4587, Columbia lode, on line 1-2, Mineral Survey No. 4587, St. Patrick lode, monumented with a limestone, 24x10x8 ins., firmly set, projecting 12 ins. above the ground, mkd. C-3-4587 with and X on top, with a cedar post, 3 ins. diam., 2 ft. long, mkd. SW COLUMBIA, firmly set alongside.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4587,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010


Deposit the mkd. stone and cedar post, inverted, alongside the stainless steel post.

St. Patrick lode

From Cor. No. 4, Mineral Survey No. 4587, St. Patrick lode, on line 1-2, Mineral Survey No. 4588, Frederickson lode, monumented with a limestone, 30x14x6 ins., firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. ST P-4-4587 with an X on top.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.



2010

Deposit the mkd. stone, inverted, alongside the stainless steel post.

Thence N. 53°40'20" E., on line 4-1, Mineral Survey No. 4587, St. Patrick lode.

8.463

Cor. No. 1, Mineral Survey No. 4587, St. Patrick lode, on line 3-4, cancelled Mineral Survey No. 4587, St. Anthony lode, determined at the center of a scattered mound of stone, with a mkd. limestone, lying loose downhill from the cor. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4587,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="841 255 1071 466" data-label="Diagram"> </div> <p>From this cor., the disturbed mkd. stone, a limestone, 40x15x8 ins., mkd. STP 1-4587 on a face, bears N. 55°08' W., 0.61 chs. dist. Leave the mkd. stone in place and destroy the marks.</p> <hr/> <p>Thence S. 36°18'50" E., on a portion of line 1-2, Mineral Survey No. 4587; St. Patrick lode, identical with a portion of line 3-4, cancelled Mineral Survey No. 4587, St. Anthony lode.</p> <p>3.486 Cor. No. 4, Mineral Survey No. 4587, Columbia lode, identical with Cor. No. 3, cancelled Mineral Survey No. 4587, St. Anthony lode.</p> <hr/> <p>From Cor. No. 3, Mineral Survey No. 4587, Columbia lode, on line 1-2, Mineral Survey No. 4587, St. Patrick lode.</p> <p>Thence S. 36°18'50" E., on a portion of line 1-2, Mineral Survey No. 4587, St. Patrick lode.</p> <p>0.70 Top of ridge, bears N. 45° W. and S. 60° E.</p> <p>10.162 Cor. No. 2, Mineral Survey No. 4587, St. Patrick lode, monumented with a chiseled X with the marks SP-2-4587 alongside, on a SW. facing limestone rock face.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole on limestone face, encased in concrete, with top mkd.</p> <div data-bbox="820 1338 1047 1502" data-label="Diagram"> </div> <p>Cor. is located on rock outcrop, on SW. facing slope.</p> <hr/> <p>Thence S. 54°00'00" W., on line 2-3, Mineral Survey No. 4587, St. Patrick lode.</p> <p>6.20 Power line, bears N. 60° W. and S. 60° E.</p> <p>6.40 Dirt road, 15 lks. wide, bears N. 60° W. and S. 60° E.</p> <p>6.70 Wash, 10 lks. wide, drains N. 60° W.</p>
--------	--

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4587,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

8.564

Cor. No. 3, Mineral Survey No. 4587, St. Patrick lode, monumented with a basalt stone (Record, limestone), 18x10x9 ins., firmly set, projecting 6 ins. above ground, mkd. ST P-3-4587 with an X on top.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.



T24S R58E  
S33

2010

Deposit the mkd. stone, inverted, alongside the stainless steel post.

Thence N. 36°03'40" W., on a portion of line 3-4, Mineral Survey No. 4587, St. Patrick lode.

2.50

Wash, 25 lks. wide, drains N. 80° W.

3.10

Dirt road, 15 lks. wide, bears N. 70° W. and S. 70° E.

3.50

Power line, bears N. 70° W. and S. 70° E.

5.081

Cor. No. 2, Mineral Survey No. 4588, Dividend lode, hereinafter described.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4588,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

Reestablishment of Portions of the Survey Executed by  
U.S. Deputy Surveyor F.W. Rodolf in 1924

Frederickson lode

From Cor. No. 1, Mineral Survey No. 4588, Frederickson lode, on line 1-4, Mineral Survey No. 1860, Commercial lode, monumented with a chiseled X with the marks F-1 alongside, mkd. on exposed bedrock surface, 3x3x1 ft. high, with a mound of stone, 3 ft. diam., 3 ft. high, S. of cor.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in bedrock, encased in concrete, with top mkd.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4588,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

2010

Thence S.  $36^{\circ}04'20''$  E. on a portion of line 1-2, Mineral Survey No. 4588, Frederickson lode.

0.662

Cor. No. 4, Mineral Survey No. 4587, St. Patrick lode, hereinbefore described.

From Cor. No. 3, Mineral Survey No. 4588, Frederickson lode, identical with Cor. No. 4, Mineral Survey No. 4588, Dividend lode, monumented with a chisled X with the marks F-3-4588 alongside, on a N. facing rock face.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over a drill hole at center of chiselled X, 1/4 in. deep, over a plastic-encased magnet, and in a mound of stone, 7 ft. base, to top, with brass cap mkd.

2010

Cor. is located on a N. facing slope, near top of ridge, bearing E. and W.

Thence N.  $32^{\circ}01'10''$  W., on line 3-4, Mineral Survey No. 4588, Frederickson lode.

9.139


Cor. No. 4, Mineral Survey No. 4588, Frederickson lode, on line 4-1, Mineral Survey No. 1860, Commercial lode, monumented with a limestone, 24x10x8 ins., firmly set, projecting 12 ins. above the ground, mkd. F-4-4588 with an X on top.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4588,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS



2010

Deposit the mkd. stone, inverted, alongside the stainless steel post.


---

Dividend lode

From Cor. No. 2, Mineral Survey No. 4588, Dividend lode, on line 3-4, Mineral Survey No. 4587, St. Patrick lode, monumented with a limestone, 24x8x8 ins., firmly set, projecting 13 ins. above the ground, mkd. D-2 4588 with an X on top.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



2010


Deposit the mkd. limestone, inverted, alongside the stainless steel post.

Thence S. 64°18'20" W., on line 2-3, Mineral Survey No. 4588, Dividend lode.

- 1.20 Power line, bears N. 70° W. and S. 70° E.
  - 1.90 Dirt road, 15 lks. wide, bears N. 70° W. and S. 70° E.
  - 2.80 Wash, 25 lks. wide, drains N. 60° W.
  - 23.939 Cor. No. 3, Mineral Survey No. 4588, Dividend lode, monumented with a broken limestone, 30x12x10 ins., the bottom portion firmly set, projecting 12 ins. above the ground, mkd. D-3 4588, with the top portion mkd. X, in a mound of stone alongside.
- At the corner point
- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF PORTIONS OF MINERAL SURVEY NO. 4588,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS



MS4588  
DI  
3

T24S R58E  
S33

2010

Deposit the mkd. stone, inverted, alongside the stainless steel post.

Thence N. 32°01'10" W., on line 3-4, Mineral Survey No. 4588, Dividend lode.

9.177

Cor. No. 4, Mineral Survey No. 4588, Dividend lode, identical with Cor. No. 3, Mineral Survey No. 4588, Frederickson lode.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA


Reestablishment of the Survey Executed by  
U.S. Mineral Surveyor C.D. Baker in 1929

Bill Nye lode

From Cor. No. 1, Mineral Survey No. 4687, Bill Nye lode, recovered by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and by William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.



MS  
4687  
B N  
1

T25S R58E  
S 6

2010

Deposit wood post, inverted, alongside stainless steel post.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 34°25'00" W., on line 1-2, Mineral Survey No. 4687, Bill Nye lode.
1.90	Edge of pit, bears NE. and SW.
3.431	Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 31, hereinbefore described, bears S. 89°38'50" E., 0.020 chs. dist.
6.70	Edge of pit, bears N. and S.
9.123	Point for Cor. No. 2, Mineral Survey No. 4687, Bill Nye lode, identical with Cor. No. 2, Mineral Survey No. 4687, Bill Nye No. 3 lode, determined at record angle from line 4-1 and at intersection with a line parallel with line 4-1, extended from Cor. No. 3, Mineral Survey No. 4687, Bill Nye No. 3 lode, falls in Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 20° E. and S. 20° W.; there is no remaining evidence of the original corner.  Set a PK nail 2 1/2 ins. long, with a steel washer mkd. BLM 2016.  from which  A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, over a plastic-encased magnet, for a reference monument, bears S. 37°08' E., 77.5 lks. dist., with brass cap mkd. RM MS 4687 COR 2 51.2 FT 2016 and an arrow pointing to the corner.  A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, over a plastic-encased magnet, for a reference monument, bears S. 37°17' W., 74.6 lks. dist., with brass cap mkd. RM MS 4687 COR 2 49.2 FT 2016 and an arrow pointing to the corner.  Cor. is located on asphalt surface, 0.08 chs. dist. from the E. edge.
	Thence N. 52°48'00" E., on line 2-3, Mineral Survey No. 4687, Bill Nye lode, identical in part with line 2-3, Mineral Survey No. 4687, Bill Nye No. 3 lode.
6.00	Left bank of wash, bears N. 30° W. and S., drains S.
8.134	Cor. No. 3, Mineral Survey No. 4687, Bill Nye No. 3 lode.  Continue measurement on line 2-3, Mineral Survey No. 4687, Bill Nye lode.
12.00	Spur, slopes N. 40° W.
17.30	Edge of pit, bears NE. and SW.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

22.686


Cor. No. 3, Mineral Survey No. 4687, Bill Nye lode, reestablished by William G. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set flush with the surface of the ground, with aluminum cap mkd. W STOUT PLS 14420, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys. This is accepted as a careful and faithful reestablishment of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T24S R58E

S31



2016

Insert the rebar inside the stainless steel post.

Thence S. 34°25'00" E., on line 3-4, Mineral Survey No. 4687, Bill Nye lode.


1.10 Edge of pit, bears NE. and SW.

5.50 Spur, slopes S. 40° W.

9.125 Cor. No. 4, Mineral Survey No. 4687, Bill Nye lode, recovered by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and by William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of earth and stone 4 ft. diam., 3 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.



2010

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 52°48'00" W., on line 4-1, Mineral Survey No. 4687, Bill Nye lode.</p>
1.00	Wash, 40 lks. wide, drains NW.
4.80	Top of ridge, bears N. 70° W. and S. 70° E.
13.20	Gulch, 30 lks. wide, drains irregularly W.
16.40	Spur, slopes N. 30° W.
18.062	Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 31, hereinbefore described, bears N. 89°38'50" W., 5.603 chs. dist.
22.686	<p>Cor. No. 1, Mineral Survey No. 4687, Bill Nye lode, and place of beginning.</p> <hr/> <p>Bill Nye No. 3 lode</p> <p>From Cor. No. 1, Mineral Survey No. 4687, Bill Nye No. 3 lode, determined at the center of a mound of stone, 3 ft. diam., 2 ft. high, with a rebar, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with no cap, alongside, W. of the cor. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>MS 4687 BN3 1 T25S      R58E S 6 2010</p> </div> <p>Leave rebar alongside stainless steel post.</p> <p>Cor. is located 20 lks. W. of the NW. edge of Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 20° E. and S. 20° W.</p> <p>Thence N. 18°23'20" E., on line 1-2, Mineral Survey No. 4687, Bill Nye No. 3 lode.</p>
9.726	Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 31, hereinbefore described, bears S. 89°38'50" E., 4.788 chs. dist.



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS


14.643

Cor. No. 2, Mineral Survey No. 4687, Bill Nye No. 3 lode, identical with Cor. No. 2, Mineral Survey No. 4687, Bill Nye lode.

From Cor. No. 3, Mineral Survey No. 4687, Bill Nye No. 3 lode, on line 2-3, Mineral Survey No. 4687, Bill Nye lode, recovered by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 3 ft. high, no marks visible. This is accepted as the best available evidence of the position of the original corner.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in limestone face, encased in concrete, with top mkd.



Deposit wood post on ground alongside brass tablet.

Thence N. 46°08'30" W., on line 3-4, Mineral Survey No. 4687, Bill Nye No. 3 lode.

2.50

Enter wash, drains SW.

6.70

Sandy Valley Road, asphalt surface, 40 lks. wide, bears N. 20° E. and S. 10° W.



9.214

Cor. No. 4, Mineral Survey No. 4687, Bill Nye No. 3 lode, reestablished by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set, projecting 3 ins. above the surface of the ground, and in a collar of stone as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and adopted by William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys. This is accepted as a careful and faithful reestablishment of the position of the original corner.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<div data-bbox="836 245 1055 511"> <p>T24S R58E S31</p>  <p>2016</p> </div> <p>Insert the rebar inside stainless steel post.</p> <hr/> <p>Thence S. 52°47'00" W., on line 4-5, Mineral Survey No. 4687, Bill Nye No. 3 lode.</p> <p>1.30 West bank of wash, bears N. 50° W. and S. 50° E., drains SE.</p> <p>5.10 Spur, slopes S. 80° E.</p> <p>6.298 Cor. No. 5, Mineral Survey No. 4686, Bill Nye No. 3 lode, recovered by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys, monumented with a wood post, 4 ins. square, 4 ft. long, no marks visible, firmly set in a mound of stone, 4 ft. diam., 3 ft. high. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="836 1267 1023 1471"> <p>T24S R58E S MS S31 4687 B N 3</p>  <p>2010</p> </div> <p>Deposit the wood post, inverted, alongside the stainless steel post.</p> <hr/> <p>Thence S. 24°04'20" W., on line 5-6, Mineral Survey No. 4687, Bill Nye No. 3 lode.</p> <p>1.70 Spur, slopes N. 70° E.</p> <p>6.30 Spur, slopes S. 70° E.</p> <p>12.10 Spur, slopes S. 40° E.</p>
--------	---

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4687,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
13.255	Intersect the Sixth Standard Parallel South, at a point from which the standard 1/4 sec. cor. of sec. 31, hereinbefore described, bears S. 89°38'50" E., 13.825 chs. dist.
16.077	<p>Cor. No. 6, Mineral Survey No. 4686, Bill Nye No. 3 lode, recovered by Terry D. Carter, Nevada Professional Land Surveyor No. 7309, in 1994, as recorded in Clark County, Nevada, File 72, Page 049 of Surveys, and William J. Stout, Nevada Professional Land Surveyor No. 14420, in 2008, as recorded in Clark County, Nevada, File 176, Page 047 of Surveys, monumented with a wood post, 4 ins. square, 4 ft. long, no marks visible, firmly set in a mound of stone, 2 ft. diam., 2 ft. high. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in limestone face, encased in concrete, with top mkd.</p> <div data-bbox="812 776 1055 940"> <p>T25S      MS R58E      6 4687 S 6      B N 3</p> </div> <p>2010</p> <p>Deposit the wood post, inverted, alongside the brass tablet.</p> <p>Thence S. 46°42'10" E. on line 6-1, Mineral Survey No. 4687, Bill Nye No. 3 lode.</p>
9.782	<p>Cor. No. 1, Mineral Survey No. 4687, Bill Nye No. 3 lode.</p> <hr/> <p>DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4690, T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>Reestablishment of the Survey Executed by U.S. Mineral Surveyor C.D. Baker in 1929</p> <hr/> <p>Akron lode</p> <p>From Cor. No. 1, Mineral Survey No. 4690, Akron lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, projecting 3 ins. above the ground, firmly set in a mound of stone, 4 ft. diam., 3 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. GIVANT PLS 14348, with a wood post, 4 ins. square, 4 ft. long, mkd. 1-4690, lying loose alongside, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4690,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div data-bbox="792 367 1023 562">  <p>MS4690 1 AK S31 T24S R58E 2010</p> </div> <p>Insert the rebar inside and deposit mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Thence S. 74°31'50" E., on line 1-2, Mineral Survey No. 4690, Akron lode.</p> <p>2.90 Spur, slopes N. 10° E.</p> <p>7.60 Spur, slopes N. 10° E.</p> <p>9.40 Gulch, 20 lks. wide, drains N.</p> <p>9.635 Cor. No. 2, Mineral Survey No. 4690, Akron lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, firmly set, projecting 1 in. above the ground, and in a mound of stone, 4 ft. diam., 3 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. GIVANT PLS 14348, with a wood post, 4 ins. square, 6 ft. long, mkd. 2-4690, lying loose alongside, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <div data-bbox="844 1308 1039 1543">  <p>MS4690 AK 2 S31 T24S R58E 2010</p> </div> <p>Insert the rebar inside and deposit mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a N. facing slope, 0.30 chs. E. of a wash, drains N.</p> <p>Thence N. 82°45'10" E., on line 2-3, Mineral Survey No. 4690, Akron lode.</p>
--------	--

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4690,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
1.70	Gulch, 20 lks. wide, drains N. 10° W.
6.10	Spur, slopes N. 40° W.
7.60	Gulch, 10 lks. wide, drains N. 80° W.
10.70	Gulch, 20 lks. wide, drains N. 50° W.
12.10	Spur, slopes N. 20° W.
12.406	Intersect the line bet. secs. 31 and 32, at a point from which the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described, bears S. 16°57'10" W., 5.167 chs. dist.
13.009	<p>Cor. No. 3, Mineral Survey No. 4690, Akron lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, firmly set, projecting 4 ins. above the ground, in a mound of stone, 5 ft. diam., 4 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. GIVANT PLS 14348, with a wood post, 4 ins. square, 4 ft. long, mkd. 3 4690, lying loose alongside, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 6 ft. base, to top, with brass cap mkd.</p> <div data-bbox="834 1069 1050 1218" data-label="Diagram"> </div> <p>2010</p> <p>Insert the rebar inside and the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a NE. facing slope.</p> <hr/> <p>Thence N. 24°54'10" W., on line 3-4, Mineral Survey No. 4690, Akron lode.</p>
0.824	Intersect the line bet. secs. 31 and 32, at a point from which the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described, bears S. 16°57'10" W, 6.028 chs. dist.
6.00	Spur, slopes NW.
7.00	Ravine, drains irregularly NW.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4690,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS


9.564

Cor. No. 4, Mineral Survey No. 4690, Akron lode, recovered by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 ft. diam., 3 ft. high, mkd. 4-4690, with brass tag nailed to top mkd. PLS 14348, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.

At the corner point

Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole in bedrock, encased in concrete, with top mkd.

T24S R58E  
S31



2010

Deposit the mkd. wood post alongside the brass tablet.

Thence S. 82°39'50" W. on line 4-5, Mineral Survey No. 4690, Akron lode, identical in part with a portion of line 2-3, cancelled Mineral Survey No. 4740, Akron Fraction lode.

11.40

Gulch, 40 lks. wide, drains SW.

13.012

Cor. No. 5, Mineral Survey No. 4690, Akron lode, identical with Cor. No. 3, cancelled Mineral Survey No. 4740, Akron Fraction lode, recovered by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a wood post, 4 ins. square, 4 ft. long, firmly set in a mound of stone, 4 ft. diam., 2 ft. high, mkd. 4690 5, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.

T24S R58E  
S31

AK 5  
MS4690

2010

Deposit the mkd. wood post, inverted, alongside the stainless steel post.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 4690,  
T. 24 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Thence N. 74°30'20" W., on line 5-6, Mineral Survey No. 4690, Akron lode.
4.10	Gulch, 45 lks. wide, drains irregularly NW.
5.80	Spur, slopes NE.
7.80	S. edge of wash, 50 lks. wide, drains NW.
9.00	Spur, slopes NW.
9.612	<p>Cor. No. 6, Mineral Survey No. 4690, Akron lode, perpetuated by Craig A. Givant, Nevada Professional Land Surveyor No. 14348, in 2007, monumented with a rebar, 1/2 in. diam., 18 ins. long, firmly set in a mound of stone, 3 ft. diam., 2 ft. high, with aluminum cap, 1 1/2 ins. diam., mkd. GIVANT PLS 14348, with a wood post, 4 ins. square, 6 ft. long, mkd. 6 4690, lying loose alongside, as recorded in Clark County, Nevada, File 166, Page 47 of Surveys.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="769 965 1062 1189" data-label="Diagram"> </div> <p>Insert the rebar inside and deposit the mkd. wood post, inverted, alongside the stainless steel post.</p> <p>Cor. is located on a spur, slopes N. 20° W., 0.50 chs. E. of a wash, 50 lks. wide, drains S.</p>
	<hr/> <p>Thence S. 24°50'00" E., on line 6-1, Mineral Survey No. 4690, Akron lode.</p>
4.40	Spur, slopes W.
6.90	Bottom of small gulch, 20 lks. wide, drains W.
9.534	Cor. No. 1, Mineral Survey No. 4690, Akron lode, and place of beginning.
	<hr/>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4739,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reestablishment of a Portion of the Survey Executed by U.S. Mineral Surveyor C.D. Baker in 1936-37</p>						
	<p>Prometheus No. 1 lode</p> <p>From Cor. No. 6, Mineral Survey No. 4739, Prometheus No. 1 lode, determined at the center of a mound of stone, 3 1/2 ft. diam., 1 1/2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="792 746 1052 868"> <p>PR 1 6 MS4739 MS1853 RU SI</p> </div> <p>2010</p> <p>Thence S. 7°25'50" W., on line 6-1, Mineral Survey No. 4739, Prometheus No. 1 lode.</p> <tr> <td data-bbox="240 1017 418 1048">11.693</td><td data-bbox="418 1017 1484 1099">Intersect the Sixth Standard Parallel South, at a point from which the standard cor. of secs. 33 and 34, hereinbefore described, bears N. 89°50'10" E., 13.345 chs. dist.</td></tr> <tr> <td data-bbox="240 1120 418 1150">12.501</td><td data-bbox="418 1120 1484 1201">Intersect line 1-2, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 1, hereinbefore described, bears S. 51°27'00" E., 1.661 chs. dist.</td></tr> <tr> <td data-bbox="240 1222 418 1252">14.839</td><td data-bbox="418 1222 1484 1385"> <p>Cor. No. 1, Mineral Survey No. 4739, Prometheus No. 1 lode, monumented with a green iron fence post, set by person(s) unknown, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 1584 1031 1757"> <p>MS4739 PR 1 1 T25S R58E S 4</p> </div> <p>2010</p> </td></tr>	11.693	Intersect the Sixth Standard Parallel South, at a point from which the standard cor. of secs. 33 and 34, hereinbefore described, bears N. 89°50'10" E., 13.345 chs. dist.	12.501	Intersect line 1-2, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 1, hereinbefore described, bears S. 51°27'00" E., 1.661 chs. dist.	14.839	<p>Cor. No. 1, Mineral Survey No. 4739, Prometheus No. 1 lode, monumented with a green iron fence post, set by person(s) unknown, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 1584 1031 1757"> <p>MS4739 PR 1 1 T25S R58E S 4</p> </div> <p>2010</p>
11.693	Intersect the Sixth Standard Parallel South, at a point from which the standard cor. of secs. 33 and 34, hereinbefore described, bears N. 89°50'10" E., 13.345 chs. dist.						
12.501	Intersect line 1-2, Mineral Survey No. 1853, Ruby Silver lode, at a point from which Cor. No. 1, hereinbefore described, bears S. 51°27'00" E., 1.661 chs. dist.						
14.839	<p>Cor. No. 1, Mineral Survey No. 4739, Prometheus No. 1 lode, monumented with a green iron fence post, set by person(s) unknown, 4 ft. long, firmly set in a mound of stone, 3 ft. diam., 1 1/2 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of earth and stone, 4 ft. base, to top, with brass cap mkd.</p> <div data-bbox="841 1584 1031 1757"> <p>MS4739 PR 1 1 T25S R58E S 4</p> </div> <p>2010</p>						



DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4739,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Reset the iron fence post alongside the stainless steel post.</p> <hr/> <p>Thence N. 46°34'00" W., on line 1-2, Mineral Survey No. 4739, Prometheus No. 1 lode.</p>
2.20	Dirt road, 15 lks. wide, bears N. 70° E. and S. 70° W.
3.30	Dirt road, 15 lks. wide, bears N. 20° W. and S. 10° E.
4.522	Intersect the Sixth Standard Parallel South at a point from which the standard cor. of secs. 33 and 34, hereinbefore described, bears N. 89°50'10" E., 17.036 chs. dist.
9.083	<p>Cor. No. 2, Mineral Survey No. 4739, Prometheus No. 1 lode, monumented with a green iron fence post, set by person(s) unknown, 4 ft. long, firmly set in a mound of stone, 2 1/2 ft. diam., 1 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T24S R58E      MS4739 S33      2      PR 1 2010</p> </div> <p>Reset the iron fence post alongside the stainless steel post.</p> <hr/> <p>Thence N. 9°08'10" E., on line 2-3, Mineral Survey No. 4739, Prometheus No. 1 lode.</p>
4.20	Dirt road, 15 lks. wide, bears N. 40° W. and S. 40° E.
4.30	Power line, bears N. 50° W. and S. 50° E.
14.994	<p>Cor. No. 3, Mineral Survey No. 4739, Prometheus No. 1 lode, determined at the center of a mound of stone, 3 ft. diam., 1 ft. high. This position correlates well with other existing corners and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to solid rock, over a plastic-encased magnet, and in a mound of stone, 7 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4739,  
TPS. 24 AND 25 S., R. 58 E., MOUNT DIABLO MERIDIAN, NEVADA

## CHAINS

T24S R58E / MS4739  
S33 / 3 PR 1  
2010

Thence N. 32°42'20" E., on line 3-4, Mineral Survey No. 4739, Prometheus No. 1 lode.

6.020

Cor. No. 4, Mineral Survey No. 4739, Prometheus No. 1 lode, identical with Cor. No. 7, Mineral Survey No. 1853, Galena lode, hereinbefore described.

#### General Description

The area encompassed in this survey is rolling to nearly level, at an average elevation of 4500 feet above sea level, with the broken terrain of the Spring Mountains running in a north to south direction through the western portion of the Township. The historic Goodsprings Townsite is located in the SE. portion of the Township.

Vegetation consists of creosote, yucca, and low brush, with grasses and various species of cacti.

The soil consists of loam deposits generated from the mountainous limestone and igneous formations throughout the surveyed area, which has been the source of the historic lead, silver and zinc mining activities going back to the 1860s.

Access to the area is gained via Nevada State Route 161 going west from Jean, Nevada, which passes through the southern portion of the township and Wilson Pass Road which passes through the middle portion of the township from Goodsprings Townsite.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

2010 - 2011

Micky J. Denison	Crew Chief
Josh B. Helmick	Crew Chief
Sean R. Stevens	Crew Chief
Taylor J. Carmack	Surveying Technician
Alex M. Blair	Survey Aid
Jacob I. Davigon	Survey Aid
Wayne G. Dubbs	Survey Aid
Huston Powell	Survey Aid
Zack A. Ruble	Survey Aid
Patrick S. Stevens	Survey Aid
Cody R. Suckow	Survey Aid
Kenneth M. Thomas	Survey Aid

2016 - 2021

Carlos Gil Mendoza	Cadastral Surveyor
Lee T. Wilson	Cadastral Surveyor
Ryan P. Marx	Cartographic Technician

## CERTIFICATE OF SURVEY

We, Brian D. Hatter, Nevada Professional Land Surveyor, Brock R. Clifford, Cadastral Surveyor and Mark G. Petrosine, Surveying Technician, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing the date of the 22nd day of September, 2009, We have dependently resurveyed the Sixth Standard Parallel South, through Range 58 East, and a portion of Range 57 East; portions of the east boundary, the west and north boundaries, a portion of the subdivisional lines and portions of certain mineral surveys, Township 24 South, Range 58 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

1/3/22  
(Date)

JUL 27 2022

(Date)

MAR 23 2022

(Date)

Brian D. Hatter  
(Nevada Professional Land Surveyor)

Mark G. Petrosine  
/For Brock R. Clifford  
(Cadastral Surveyor)

Mark G. Petrosine  
(Surveying Technician)

## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Reno, Nevada

The foregoing field notes of the dependent resurvey of the Sixth Standard Parallel South, through Range 58 East, and a portion of Range 57 East; portions of the east boundary, the west and north boundaries, a portion of the subdivisional lines and portions of certain mineral surveys, Township 24 South, Range 58 East, of the Mount Diablo Meridian, Nevada, executed by Brian D. Hatter, Nevada Professional Land Surveyor, Brock R. Clifford, Cadastral Surveyor and Mark G. Petrosine, Surveying Technician, having been critically examined and found correct, are hereby approved.

JUL 27 2022

(Date)

Mark G. Petrosine  
(Chief Cadastral Surveyor for Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in Township 24 South, Range 58 East, Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor for Nevada)~~