

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

RETRACEMENT OF THE NEVADA-UTAH STATE LINE,
BETWEEN THE WITNESS CORNER FOR MILE POST NO. 41 AND MILE POST NO. 44;

THE DEPENDENT RESURVEY OF PORTIONS

OF THE SUBDIVISIONAL LINES AND

A PORTION OF MINERAL SURVEY NO. 4699;

METES-AND-BOUNDS SURVEYS

OF A PORTION OF PARCEL A IN SECTIONS 22 AND 27

AND A PORTION OF PARCEL B IN SECTIONS 15 AND 22;

AND A METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27,

TOWNSHIP 33 NORTH, RANGE 70 EAST,

OF THE MOUNT DIABLO MERIDIAN,

IN THE STATE OF NEVADA

EXECUTED BY

Lee T. Wilson, Cadastral Surveyor

Under Special Instructions dated July 29, 2024,

and approved July 29, 2024, and July 31, 2024

and Supplemental Special Instructions dated August 27, 2025

and approved September 2, 2025

which provided for the surveys included under Group No. 1017,


and Assignment Instructions dated July 29, 2024.

Survey commenced August 23, 2024

Survey completed September 17, 2025

INDEX DIAGRAM

TOWNSHIP 33 NORTH, RANGE 70 EAST, MOUNT DIABLO MERIDIAN, NEVADA

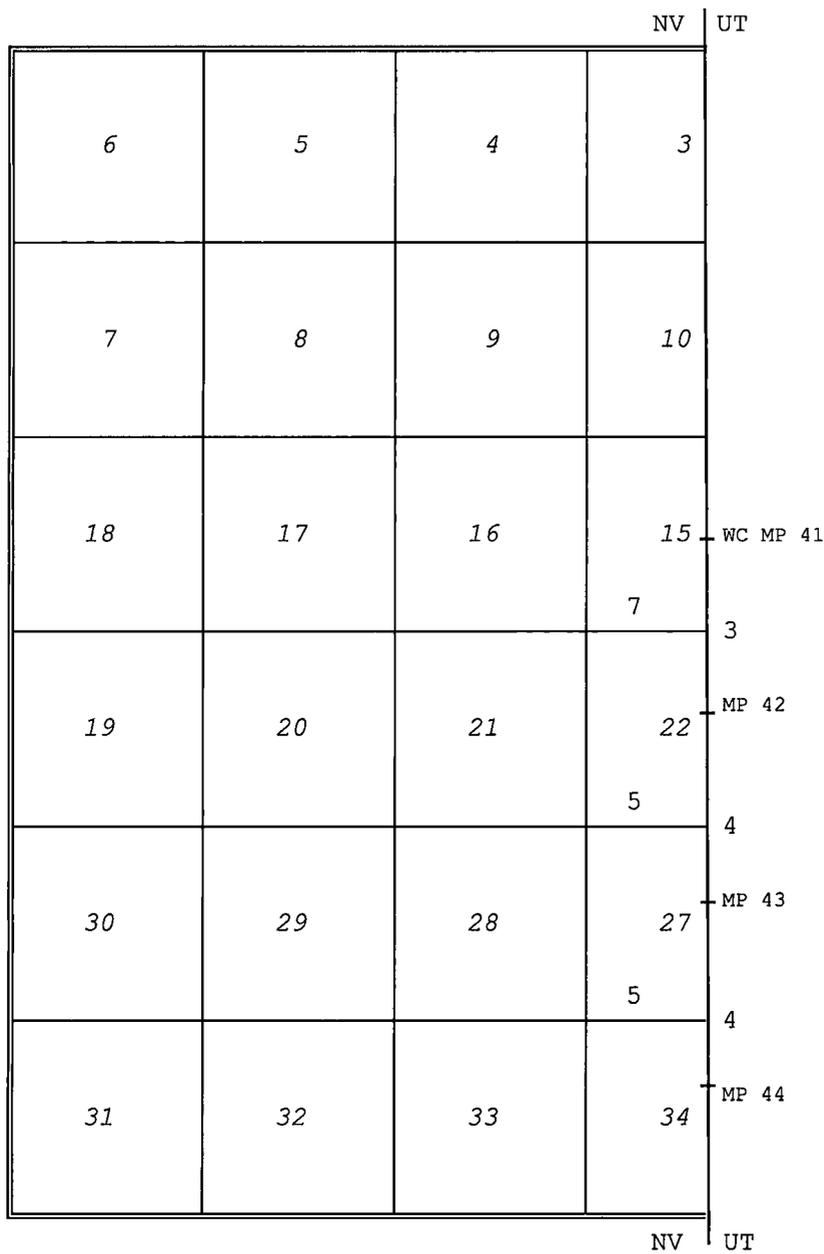

DEPENDENT RESURVEY OF A PORTION OF M.S. No. 4699 pp 8 - 9
 METES-AND-BOUNDS SURVEY OF A PORTION OF PARCEL A
 IN SECTIONS 22 AND 27 pp 9 - 11
 METES-AND-BOUNDS SURVEY OF A PORTION OF PARCEL B
 IN SECTIONS 15 AND 22 pp 11 - 12
 METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27 pp 13 - 16

TOWNSHIP 33 NORTH, RANGE 70 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the retracement of the Nevada-Utah State Line between the witness corner for Mile Post No. 41 and Mile Post No. 44; the dependent resurvey of portions of the subdivisional lines and a portion of Mineral Survey No. 4699; metes-and-bounds surveys of a portion of Parcel A in sections 22 and 27 and a portion of Parcel B in sections 15 and 22; and a metes-and-bounds survey in sections 15, 22, and 27, Township 33 North, Range 70 East, Mount Diablo Meridian, Nevada.

1870 - The east boundary of Nevada was surveyed by Astronomer and Surveyor I.E. James, under contract dated August 16, 1870.

1907 - The Utah-Nevada Boundary Line between Mile Post Nos. 42 and 62 was resurveyed by U.S. Deputy Surveyor A.J. Stookey, under Contract No. 296, Utah.

1908 - The Utah-Nevada Boundary Line between Mile Post Nos. 37 and 42 was resurveyed by U.S. Deputy Surveyor R.E.L. Collier, under Contract No. 301, Utah.

1929 - Mineral Survey No. 4699, Salt Spring Number Two lode was surveyed by U.S. Mineral Surveyor C.F. De Armond.

1929 - Mineral Survey No. 4700, Safety Last No. 1, Safety Last No. 3, and Safety Last No. 4 lodes was surveyed by U.S. Mineral Surveyor C.F. De Armond.

1930 - The Eastline Townsite was surveyed by Surveyor C.F. De Armond.

1936-1937 - The Nevada-Utah State Boundary between Mile Post Nos. 44 and 50 was resurveyed and the north boundary of T. 32 N., R. 70 E. was surveyed by Cadastral Engineer P.L. Inch and Transitmen C.F. Warner and F.L. Rhodes, under Group No. 194.

1947 - The Nevada-Utah State Line between Mile Post Nos. 38 and 44 was resurveyed and the west and north boundaries and the subdivisional lines were surveyed by Cadastral Engineer G.M. Litz, under Group No. 334.

1957 - A supplemental plat of section 15 was accepted.

1970 - A supplemental plat of sections 16, 20, 21, and 29 was accepted.

1972 - A supplemental plat of section 15 was accepted.

1977 - Mineral Survey No. 4927 (cancelled), West Wendover #1 Placer, was surveyed by Mineral Surveyor M. Chilton.

1985 - A supplemental plat of the Eastline Townsite was accepted.

1986 - A supplemental plat of the N1/2 of section 15 was accepted.

1986 - A supplemental plat of section 16 was accepted.

1988 - A supplemental plat of the SW1/4 of section 7 was accepted.

1997 - A supplemental plat of sections 30 and 31 was accepted.

TOWNSHIP 33 NORTH, RANGE 70 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>1999 - A supplemental plat of section 8 was accepted.</p> <p>2018 - A supplemental plat of section 8 was prepared by Cadastral Surveyor B.K. Grace, under Group No. 987.</p> <p>2019 - A supplemental plat of section 16 was prepared under the oversight of Supervisory Cadastral Surveyor C.D. Strickland, under Group No. 990.</p> <p>Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the position of the original corners and other calls of the original field note record.</p> <p>In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.</p> <p>The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, the Special Instructions for Group No. 1017, dated July 29, 2024, and the Supplemental Special Instructions dated August 27, 2025.</p> <p>Measurements were made with Trimble R-8 and R-10 Global Navigation Satellite System (GNSS) receivers using the real-time kinematic (RTK) method and refer to the true meridian based on geodetic methods. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.</p> <p>The NAD 83(2011)(EPOCH:2010.0000) geographic position, of the following corners, was determined from Global Positioning System (GPS) static observations processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS) DG7434 P057 HILL72 UT2004 CORS GRP, DL7736 P100 PARKVALLEYUT2007 CORS GRP, DG9773 P121 HNSLVALLY_UT2004 CORS GRP, and DL7694 GOSH GOSH_BRGN_UT1996 CORS GRP, and carried forward by RTK observations.</p> <p>The 1/4 section corner of sections 27 and 34, is as follows:</p> <p style="padding-left: 40px;">Latitude: 40°41'50.055" N. Longitude: 114°02'48.125" W.</p> <p>Angle Point No. 5 of the metes-and-bounds survey in sections 15, 22, and 27, identical with Corner No. 1, Mineral Survey No. 4700, Safety Last No. 3 lode, is as follows:</p> <p style="padding-left: 40px;">Latitude: 40°44'01.815" N. Longitude: 114°03'11.961" W.</p> <hr/>
--------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

RETRACEMENT OF THE NEVADA-UTAH STATE LINE
 BETWEEN THE WITNESS CORNER FOR MILE POST NO. 41
 AND MILE POST NO. 44

<p>CHAINS</p>	<p>Retracement of a portion of the survey executed by Astronomer and Surveyor I.E. James in 1870, a portion of the resurvey executed by U.S. Deputy Surveyor A.J. Stookey in 1907, a portion of the resurvey executed by U.S. Deputy Surveyor R.E.L. Collier in 1908, a portion of the resurvey and survey executed by Cadastral Engineer G.M. Litz in 1947</p> <hr/> <p style="text-align: center;">MEMORANDUM</p> <p>The following retracement of the Nevada-Utah State Line, between the witness corner for Mile Post No. 41 and Mile Post No. 44 is limited to the location of state line mile posts, closing corners and 1/4 section corners set during the survey of the subdivisional lines, T. 33 N., R. 70 E., Mount Diablo Meridian, Nevada, and the witness point and angle points set during this survey.</p> <hr/> <p>Beginning at the witness cor. to Mile Post No. 41 on the Nevada-Utah State Line, monumented with a brass disk, 3 1/2 ins. diam., firmly set, flush with the surface of a limestone outcrop, mkd. as described in the field notes of the 1947 Dependent Resurvey of the Nevada-Utah State Line, executed under Group No. 334.</p> <p>S. 0°18'20" W., on a portion of the 41st mile.</p> <p>38.250 The closing cor. of secs. 15 and 22, monumented with an iron post, 2 ins. diam., firmly set, 12 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td></td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">T33N</td> <td></td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S15</td> <td></td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">CC</td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">S22</td> <td style="border-left: 1px solid black; padding-left: 5px;">UTAH</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 5px;">R70E</td> <td></td> </tr> </table> <p>1947</p> </div> <p>from which</p> <p style="padding-left: 40px;">The rusted remains of an iron post, 1 in. diam., loosely set, 3 ins. below the surface of the ground, bears S. 0°02'40" W., 1.000 ch. dist.</p> <p style="padding-left: 40px;">The rusted remains of an iron post, 1 in. diam., firmly set, 2 ins. below the surface of the ground, bears N. 89°58'10" W., 1.000 ch. dist.</p> <p>58.179 Point for a witness point, at the intersection of the line between Angle Point No. 1 and Angle Point No. 2 of the metes-and-bounds survey of Parcel B with the Nevada-Utah State Line, hereinafter described.</p>		T33N			S15		CC	S22	UTAH		R70E	
	T33N												
	S15												
CC	S22	UTAH											
	R70E												

RETRACEMENT OF THE NEVADA-UTAH STATE LINE
BETWEEN THE WITNESS CORNER FOR MILE POST NO. 41
AND MILE POST NO. 44

CHAINS 67.434	<p>Mile Post No. 42 on the Nevada-Utah State Line, monumented with an iron post, 2 ins. diam., firmly set, flush with the surface of an embedded mound of stone, 4 1/2 ft. diam., with brass cap mkd. as described in the field notes of the 1947 dependent resurvey of the Nevada-Utah State Line, executed under Group No. 334.</p> <hr/> <p>S. 0°18'10" W., on the 42nd mile.</p>					
10.834	The 1/4 sec. cor. of sec. 22, monumented with an iron post, 1 in. diam., firmly set, 5 ins. below the surface of the ground, with brass cap mkd. as described in the field notes of the 1947 subdivision of T. 33 N., R. 70 E., executed under Group No. 334.					
40.950	Point for Angle Point No. 3, Parcel A, on the Nevada-Utah State Line, hereinafter described.					
50.837	The closing cor. of secs. 22 and 27, hereinafter described.					
79.908	<p>Mile Post No. 43 on the Nevada-Utah State Line, monumented with an iron post, 2 ins. diam., firmly set, projecting 2 ins. above a mound of stone, 6 ft. diam., 1/2 ft. high, with brass cap mkd. as described in the field notes of the 1947 dependent resurvey of the Nevada-Utah State Line, executed under Group No. 334.</p> <hr/> <p>S. 0°18'20" W., on the 43rd mile.</p>					
10.937	The 1/4 sec. cor. of sec. 27, monumented with an iron post, 1 in. diam., firmly set, 1 in. below the surface of the ground, with brass cap mkd. as described in the field notes of the 1947 subdivision of T. 33 N., R. 70 E., executed under Group No. 334, with an embedded mound of stone, 4 ft. diam., W. of the cor.					
12.518	Point for Angle Point No. 1, Parcel A, on the Nevada-Utah State Line, hereinafter described.					
50.952	The closing cor. of secs. 27 and 34, monumented with an iron post, 2 ins. diam., firmly set, 6 ins. below the surface of the ground, with brass cap mkd.					
	<table style="margin-left: auto; margin-right: auto;"> <tbody> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T33N</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R70E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S27</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">CC</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S34</td></tr> </tbody> </table> <p>1947</p>	T33N	R70E	S27	CC	S34
T33N						
R70E						
S27						
CC						
S34						
	<p>and other illegible markings.</p> <p>Corner is located W. of barbed wire fence, extending N. and S.</p>					

RETRACEMENT OF THE NEVADA-UTAH STATE LINE
BETWEEN THE WITNESS CORNER FOR MILE POST NO. 41
AND MILE POST NO. 44

<p>CHAINS 79.943</p>	<p>Mile Post No. 44 on the Nevada-Utah State Line, monumented with an iron post, 2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as described in the field notes of the 1936-1937 Dependent Resurvey of the Nevada-Utah State Line, executed under Group No. 194, with an embedded mound of stone, 3 ft. diam., W. of the cor.</p>
<hr/> <p>DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
<p>Reestablishment of a Portion of the Survey Executed by Cadastral Engineer G.M. Litz in 1947</p> <hr/>	
<p>From the cor. of secs. 27, 28, 33, and 34, monumented with an iron post, 2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as described in the field notes of the 1947 survey of the subdivisional lines, T. 33 N., R. 70 E., executed under Group No. 334, with a mound of stone, 3 ft. diam., 1 1/2 ft. high, W. of the cor.</p>	
<p>EAST, bet. secs. 27 and 34.</p>	
<p>12.352</p>	<p>The witness point at the intersection with the metes-and-bounds survey in secs. 15, 22, and 27, hereinafter described.</p>
<p>40.014</p>	<p>The 1/4 sec. cor. of secs. 27 and 34, monumented with an iron post, 1 in. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as described in the field notes of the 1947 survey of the subdivisional lines, T. 33 N., R. 70 E., executed under Group No. 334, with a mound of stone, 2 1/2 ft. diam., 1 ft. high, N. of the cor.</p>
<hr/> <p>From the cor. of secs. 21, 22, 27, and 28, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as described in the field notes of the 1947 survey of the subdivisional lines, T. 33 N., R. 70 E., executed under Group No. 334, with a scattered mound of stone, 3 ft. diam., 1/2 ft. high, W. of the cor.</p>	
<p>S. 89°59'50" E., bet. secs. 22 and 27.</p>	
<p>12.350</p>	<p>The witness point at the intersection with the metes-and-bounds survey in secs. 15, 22, and 27, hereinafter described.</p>
<p>24.6</p>	<p>Improved road, 40 lks. wide, bears N. and S.</p>
<p>40.016</p>	<p>The 1/4 sec. cor. of secs. 22 and 27, monumented with the rusted remains of an iron post, 1 in. diam., firmly set, projecting 1 in. above the ground, with the top portion of the iron post, 6 ins. long, with brass cap mkd. as described in the field notes of the 1947 survey of the subdivisional lines, T. 33 N., R. 70 E., executed under Group No. 334, lying loose alongside, with a mound of stone, 2 ft. diam., 1/2 ft. high, N. of the cor.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T33N R70E S22 1/4 ——— S27 2024</p> <p>Bury the remains of the iron post alongside the stainless steel post and retain the mound of stone.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°59'00" E., beginning new measurement.</p>
2.189	Intersect the metes-and-bounds survey of a portion of Parcel A in sections 22 and 27, hereinafter described.
3.0	The NW. corner of asphalt stabilized runway extension bears SOUTH, 1.0 ch. dist. and a buried pipeline, bears NE. and SW.
11.980	<p>The closing cor. of secs. 22 and 27, monumented with the rusted remains of an iron post, 2 ins. below the surface of a graded road, bears N. and curving SW. Road was paved during the course of this survey, now bears N. and S.</p> <p>At the corner point</p> <p>Set a magnetic survey nail, 3/8 in. diam., 3 ins. long, flush with surface of asphalt roadway, with aluminum washer mkd. BLM CADASTRAL SURVEY 2024.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, over a plastic-encased magnet, for a reference monument, bears S. 45°00'00" W., 0.750 chs. dist., with brass cap mkd. RM T33N R70E S27 49.5 FT. TO COR. 2024 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, over a plastic-encased magnet, for a reference monument, bears N. 45°00'00" W., 1.000 chs. dist., with brass cap mkd. RM T33N R70E S22 66.0 FT. TO COR. 2024 and an arrow pointing to the cor.</p> <p>From this closing corner, Mile Post No. 42 on the Nevada-Utah State Line, hereinbefore described, bears N. 0°18'10" E., 50.837 chs. dist.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From this same closing corner, Mile Post No. 43 on the Nevada-Utah State Line, hereinbefore described, bears S. 0°18'10" W., 29.071 chs. dist.</p>
	<p>From the cor. of secs. 15, 16, 21, and 22, monumented with an iron post, 2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. as described in the field notes of the 1947 survey of the subdivisional lines, T. 33 N., R. 70 E., executed under Group No. 334, with a steel fence post set alongside and a mound of stone, 3 ft. diam., 1 ft. high, W. of the cor.</p>
	<p>S. 89°59'30" E., bet. secs. 15 and 22.</p>
12.065	<p>The witness point, at the intersection with the metes-and-bounds survey in sections 15, 22, and 27, hereinafter described.</p>
31.7	<p>Improved road, 40 lks. wide, bears NE. and SW.</p>
35.881	<p>Intersect the metes-and-bounds survey of a portion of Parcel B in secs. 15 and 22, hereinafter described.</p>
40.020	<p>The 1/4 sec. cor. of secs. 15 and 22, monumented with the rusted remains of an iron post, 1 in. diam., firmly set, 1 in. below the surface of the ground, with a steel fence post set alongside and a mound of stone, 2 1/2 ft. diam., 1 ft. high, N. of the cor.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T33N R70E S15 1/4 ——— . S22 2024</p>
	<p>Bury the remains of the iron post alongside the stainless steel post and retain the mound of stone and steel fence post.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4699,
SALT SPRING NUMBER TWO LODE,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA AND
T. 1 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS	
	<p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Mineral Surveyor C.F. De Armond in 1927</p> <hr style="width: 20%; margin: auto;"/> <p>From Cor. No. 2, Mineral Survey No. 4699, Salt Spring Number Two lode, determined at the position of the disintegrating, rusted remains of a rebar, recovered 3 ins. below the surface of the ground. This position is in substantial agreement with the official record, has long-standing local acceptance, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center; border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> MS4699 SS2 2 </div> <p style="text-align: center;">2024</p> <p>Bury the remains of the rebar alongside the stainless steel post.</p> <p>N. 89°51'50" W., on line 2-3, Mineral Survey No. 4699, Salt Spring Number Two lode.</p> <p>0.087 Point of intersection with the Nevada-Utah State Line.</p> <p>POINT NOT MONUMENTED</p> <p>From this point, the witness cor. to Mile Post No. 41 on the Nevada-Utah State Line, hereinbefore described, bears N. 0°18'20" E., 29.14 chs. dist.</p> <p>From the same point, Mile Post No. 42 on the Nevada-Utah State Line, hereinbefore described, bears S. 0°18'20" W., 38.294 chs. dist.</p> <p>7.504 Angle Point No. 3 of the metes-and-bounds survey of a portion of Parcel B in secs. 15 and 22, hereinafter described.</p> <p>9.093 Cor. No. 3, Mineral Survey No. 4699, Salt Spring Number Two lode, monumented with the rusted remains of a rebar, 5/8 in. diam., firmly set, 1 in. below the surface of the ground. This position is in substantial agreement with the official record, has long-standing local acceptance, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4699,
SALT SPRING NUMBER TWO LODE,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA AND
T. 1 S., R. 19 W., SALT LAKE MERIDIAN, UTAH

CHAINS

MS4699
SS2
3

T33N
R70E
S15

2024

Bury the rebar alongside the stainless steel post.

METES-AND-BOUNDS SURVEY OF A
PORTION OF PARCEL A IN SECTIONS 22 AND 27,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

MEMORANDUM

The following metes-and-bounds survey identifies portions of the boundaries of the second parcel in the state of Nevada, in the quitclaim deed conveyed by the United States of America, acting by and through the Administrator of General Services, recorded as Document No. 320763, in Book 152 of Records, Page 830, in the Tooele County Recorder's office, on October 19, 1977, and as Document No. 110439, in Book 262, Page 168, in the Elko County Recorder's Office on February 16, 1978.

This parcel, designated herein as Parcel A, was laid out by utilizing the quitclaim deed description and holding the record distances and internal angles, rotating the entire parcel to place the initial point of beginning tie and course 3 on the Nevada-Utah State Line.

From the point for Angle Point No. 1, Parcel A, on the Nevada-Utah State Line.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



AP1

T33N
R70E
S27

2024

From this point, Mile Post No. 43 on the Nevada-Utah State Line, hereinbefore described, bears N. 0°18'20" E., 12.518 chs. dist.

METES-AND-BOUNDS SURVEY OF A
 PORTION OF PARCEL A IN SECTIONS 22 AND 27,
 T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From this same point, Mile Post No. 44 on the Nevada-Utah State Line, hereinbefore described, bears S. 0°18'20" W., 67.425 chs. dist.</p>
	<p>N. 45°02'00" W., on line 1-2, Parcel A, in sec. 27.</p>
18.1	<p>Improved road, 40 lks. wide, bears ENE. and curving NNW.</p>
23.1	<p>Improved road, 40 lks. wide, bears NE. and curving S.</p>
29.4	<p>Improved road, 40 lks. wide, bears SE. and NW.</p>
36.164	<p>Point for Angle Point No. 2, Parcel A.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	
	<p>N. 44°58'00" E., on line 2-3, Parcel A, in sec. 27.</p>
1.0	<p>Improved Road, 40 lks. wide, bears SE. and NW.</p>
22.661	<p>Intersect the line bet. secs. 22 and 27.</p>
	<p>Continue N. 44°58'00" E., on line 2-3, Parcel A, in sec. 22.</p>
36.588	<p>Point for Angle Point No. 3, Parcel A, on the Nevada-Utah State Line.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	
	<p>From this point, Mile Post No. 42 on the Nevada-Utah State Line, hereinbefore described, bears N. 0°18'10" E., 40.950 chs. dist.</p>

METES-AND-BOUNDS SURVEY OF A
 PORTION OF PARCEL A IN SECTIONS 22 AND 27,
 T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

From this same point, Mile Post No. 43 on the Nevada-Utah State Line, hereinbefore described, bears S. 0°18'10" W., 38.958 chs. dist.

METES-AND-BOUNDS SURVEY OF A
 PORTION OF PARCEL B IN SECTIONS 15 AND 22,
 T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA


MEMORANDUM

The following metes-and-bounds survey identifies a portion of the boundaries of the first parcel in the state of Nevada, in the Quitclaim deed conveyed by the United States of America, acting by and through the Administrator of General Services, recorded as Document No. 320763, in Book 152 of Records, Page 830, in the Tooele County Recorder's office, on October 19, 1977, and as Document No. 110439, in Book 262, Page 168, in the Elko County Recorder's Office on February 16, 1978.

This parcel, designated herein as Parcel B, was laid out by utilizing the quitclaim deed description and holding the record distances and internal angles, rotating the parcel so that courses 1 and 5 are parallel with the Nevada-Utah State Line, and projecting course 3 to its intersection with line 2-3, Mineral Survey No. 4699, Salt Springs Number Two lode.

From the point for a witness point, at the intersection of the line between Angle Point No. 1 and Angle Point No. 2 of this metes-and bounds survey, with the Nevada-Utah State Line.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.



2024

From this point, the point for Angle Point No. 1, Parcel B, bears S. 45°03'00" E, 1.35 chs. dist. This angle point falls in the state of Utah and is NOT MONUMENTED.

From this same point, the witness corner to Mile Post No. 41 on the Nevada-Utah State Line, hereinbefore described, bears N. 0°18'20" E., 58.179 chs. dist.

From this same point, Mile Post No. 42 on the Nevada-Utah State Line, hereinbefore described, bears S. 0°18'20" W., 9.255 chs. dist.

METES-AND-BOUNDS SURVEY OF A
 PORTION OF PARCEL B IN SECTIONS 15 AND 22,
 T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 45°03'00" W., on line 1-2, Parcel B, in sec. 22.</p>
<p>25.668</p>	<p>Point for Angle Point No. 2, Parcel B.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>T33N R70E S22 AP2 2024</p> </div> <p>From this point, a rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with illegible plastic cap, bears N. 70°58'40" W., 1.170 chs. dist.</p>
	<p>N. 44°57'00" E., on line 2-3, Parcel B, in sec. 22.</p>
<p>2.535</p>	<p>Intersect the line bet. secs. 15 and 22.</p>
	<p>Continue N. 44°57'00" E., on line 2-3, Parcel B, in sec. 15.</p>
<p>15.427</p>	<p>Point for Angle Point No. 3, Parcel B, at the intersection with line 2-3, Mineral Survey No. 4699, Salt Spring Number Two lode.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<div style="text-align: center;"> <p>MS 4699 SS2 T33N R70E S15 AP3 2024</p> </div> <p>From this point, Cor. No. 2, Mineral Survey No. 4699, Salt Spring Number Two lode, hereinbefore described, bears S. 89°51'50" E., 7.504 chs. dist.</p> <p>From this same point, Cor. No. 3, Mineral Survey No. 4699, Salt Spring Number Two lode, hereinbefore described, bears N. 89°51'50" W., 1.589 chs. dist.</p>

METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	MEMORANDUM
	<p>The following metes-and-bounds survey identifies the westerly extent of lands to be conveyed to Tooele County, Utah, pursuant to section 2843, Public Law 107-314, Bob Stump National Defense Authorization Act for Fiscal Year 2003.</p> <hr/> <p>From the point for a witness point, on the line bet. secs. 27 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T33N R70E</p> <p> </p> <p>S27</p> <hr style="width: 10%; margin: auto;"/> <p>S34</p> <p>2024</p> </div> <p>From this point, the cor. of secs. 27, 28, 33, and 34 bears WEST, 12.352 chs. dist.</p> <p>N. 0°02'20" E., in sec. 27.</p>
39.000	<p>Point for a witness point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
80.019	<div style="text-align: center;"> <p>WP T33N R70E</p> <p> </p> <p>S27</p> <hr style="width: 10%; margin: auto;"/> <p>2024</p> </div> <p>Point for a witness point, at the intersection with the line bet. secs. 22 and 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;"> <p>WP T33N R70E S22 ----- S27 </p> <p>2024</p> </div> <p>From this point, the cor. of secs. 21, 22, 27, and 28 bears N. 89°59'50" W., 12.350 chs. dist.</p> <hr/> <p>Continue previous measurement in sec. 22.</p> <p>97.073 Point for Angle Point No. 1.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T33N R70E AP1 ----- S22 </p> <p>2024</p> </div>
	<hr/> <p>S. 89°57'20" W., in sec. 22.</p> <p>4.076 Point for Angle Point No. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T33N R70E AP2 ----- S22</p> <p>2024</p> </div>
	<hr/> <p>N. 0°02'40" W., in sec. 22.</p> <p>20.000 Point for a witness point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
45.455	<p style="text-align: center;">WP T33N R70E S22 2024</p> <p>Point for Angle Point No. 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T33N R70E S22 ┌ AP3 └ 2024</p>
3.854	<p>N. 89°57'20" E., in sec. 22.</p> <p>Point for Angle Point No. 4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T33N R70E S22 ┌ └ AP4 2024</p>
17.509	<p>N. 0°02'20" E., in sec. 22.</p> <p>Point for a witness point, at the intersection with the line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

METES-AND-BOUNDS SURVEY IN SECTIONS 15, 22, AND 27,
T. 33 N., R. 70 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;"> WP T33N R70E S15 ----- S22 2024 </p>
	<p>From this point, the cor. of secs. 15, 16, 21, and 22 bears N. 89°59'30" W., 12.065 chs. dist.</p> <hr/>
	<p>Continue previous measurement in sec. 15.</p>
<p>49.5</p>	<p>Airport Road, asphalt surface, 45 lks. wide, bears ESE. and WNW.</p>
<p>59.552</p>	<p>Point for Angle Point No. 5, identical with Cor. No. 1, Mineral Survey No. 4700, Safety Last No. 3 lode, monumented with a rebar, 5/8 in. diam., 18 ins. long, firmly set, 3 ins. below the surface of the ground. This position is in substantial agreement with the official record, has long-standing local acceptance, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;"> MS4700 SL3 1 ----- T33N AP5 R70E S15 2024 </p> <hr/>
	<p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area surveyed is south of West Wendover, Nevada and west of the Tooele County Wendover Airport. The general drainage is to the southeast.</p> <p>Primary access is provided by U.S. Hwy. 93 Alt. and Airport Way. Secondary access is provided by gravel roads, trail roads, and cross country travel.</p> <p>Vegetation consists of scattered brush and small plants.</p> <p>The average elevation is approximately 4,200 ft. above sea level.</p> <hr/>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Ryan P. Marx

Surveying Technician

CERTIFICATE OF SURVEY

I, Lee T. Wilson, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing the date of the 29th day of July, 2024 and Supplemental Special Instructions bearing the date of the 27th day of August, 2025, I have retraced the Nevada-Utah State Line between the witness corner for Mile Post No. 41 and Mile Post No. 44; dependently resurveyed portions of the subdivisional lines and a portion of Mineral Survey No. 4699; performed metes-and-bounds surveys of a portion of Parcel A in sections 22 and 27 and a portion of Parcel B in sections 15 and 22; and performed a metes-and-bounds survey in sections 15, 22, and 27, Township 33 North, Range 70 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 24 2025

(Date)

Lee T. Wilson

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the retracement of the Nevada-Utah State Line, between the witness corner for Mile Post No. 41 and Mile Post No. 44; the dependent resurvey of a portions of the subdivisional lines and a portion of Mineral Survey No. 4699; the metes-and-bounds surveys of a portion of Parcel A in sections 22 and 27 and a portion of Parcel B in sections 15 and 22; and the metes-and-bounds survey in sections 15, 22, and 27, Township 33 North, Range 70 East, of the Mount Diablo Meridian, Nevada, executed by Lee T. Wilson, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

SEP 29 2025

(Date)

Clarence D. Strickland
(Chief Cadastral Surveyor for Nevada)

SEP 30 2025

(Date)

Angie Styer
(Exercising the Delegated Authority,
Chief Cadastral Surveyor, Headquarters)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in Township 33 North, Range 70 East, Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor for Nevada)~~

~~(Date)~~

~~(Exercising the Delegated Authority,
Chief Cadastral Surveyor, Headquarters)~~