

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

A PORTION OF MINERAL SURVEY NO. 4025,

AND

THE SUBDIVISION OF SECTION 12

AND

A METES-AND-BOUNDS SURVEY OF PARCEL A IN SECTION 12,

TOWNSHIP 36 NORTH, RANGE 37 EAST,

OF THE MOUNT DIABLO MERIDIAN,

IN THE STATE OF NEVADA

EXECUTED BY

Stephen R. Lambeth, Cadastral Surveyor

Under Special Instructions dated July 20, 2000,

and approved July 20, 2000,

which provided for the surveys included under Group No. 792,

and Assignment Instructions dated July 20, 2000.

Survey commenced July 24, 2000

Survey completed August 3, 2000

INDEX DIAGRAM

TOWNSHIP 36 NORTH, RANGE 37 EAST, MOUNT DIABLO MERIDIAN, NEVADA

6	5	4	3	2	1 3
7	8	9	10	11	2 12 2
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Dependent Resurvey of a Portion of Mineral Survey No. 4025 pp. 4 - 5
 Subdivision of Section 12.....pp. 5 - 14
 Metes-and-Bounds Survey of Parcel A, in Section 12.....pp. 15 - 16

TOWNSHIP 36 NORTH, RANGE 37 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and a portion of Mineral Survey No. 4025, and the subdivision of section 12 and a metes-and-bounds survey of Parcel A in section 12, Township 36 North, Range 37 East, Mount Diablo Meridian, Nevada.

The Seventh Standard Parallel North, through Range 37 East (South boundary), and the east, west and north boundaries were surveyed by U.S. Deputy Surveyor W.M. Epler in 1867 under Contract No. 5. A portion of the subdivisional lines was surveyed by U.S. Deputy Surveyor A.J. Hatch in 1868 under Contract No. 14. The west boundary and a portion of the subdivisional lines were resurveyed, and a portion of the subdivisional lines were surveyed by U.S. Deputy Surveyor H.B. Maxson in 1888 under Contract No. 189. The south, west and north boundaries, a portion of the east boundary and a portion of the subdivisional lines were resurveyed by J.R. Munson in 1965 under Group No. 427. Mineral Survey No. 4025, A and T, and A and T No. 1 lodes were surveyed by U.S. Mineral Surveyor H.H. Sheldon in 1911.

Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated July 20, 2000.

The direction of the lines of this survey were determined by use of Global Positioning System (GPS) satellite data, using the real-time kinematic survey process, and refer to the true meridian. The mean bearings of the lines and horizontal equivalents of ground distances are only entered in the field notes.

The geographic position for the cor. of secs. 11, 12, 13 and 14, is at Latitude $41^{\circ}00'13.104''$ N. and Longitude $117^{\circ}46'25.921''$ W., NAD 83 (1994), as determined by survey-grade GPS receivers, in 2000, from National Geodetic Survey Station "I 001 3 2 27" a Nevada Department of Highways monument, located in sec. 36.

The 1982 mean magnetic declination is 17° E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "WINNEMUCCA MTN., NEVADA", dated 1982.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor A.J. Hatch in 1868, a Portion of the Resurvey and Survey Executed by U.S. Deputy Surveyor H.B. Maxson in 1888, and a Portion of the Resurvey Executed by Cadastral Surveyor J.R. Munson in 1965</p> <hr/>
	<p>Beginning at the 1/4 sec. cor. of secs. 12 and 13, monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 36 N., R. 37 E., executed under Group No. 427.</p> <p>N. 89°43'20" W., bet. secs. 12 and 13.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
20.606	<p>Point for the W 1/16 sec. cor. of secs. 12 and 13.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 12 W 1/16 <u> </u> S 13</p> <p>2000</p> </div>
41.212	<p>The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 14 ins. above the ground, and in a collar of stone, with brass cap mkd. as described in the field notes of the dependant resurvey of T. 36 N., R. 37 E., executed under Group No. 427.</p> <p>From this cor., National Geodetic Survey Station "I 001 3 2 27", a Nevada Department of Highways monument, a standard disk, 3 ins. diam., firmly set in concrete, 10 ins. at base and 6 ins. at top, projecting 8 ins. above the ground mkd. "BM-001-3-2-27", bears S. 8°56'51" E., (mean bearing) 313.801 chs. dist.</p> <hr/>
	<p>N. 1°07'30" E., bet. secs. 11 and 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
16.80	Trail road, bears NE. and SW.
18.20	Trail road, bears NE. and SW.
19.460	<p>Point for the S 1/16 sec. cor. of secs. 11 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	S 1/16 S11 S12 2000 Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.
23.50	Trail road, bears SE. and NW.
37.20	Paved road, bears NE. and SW.
38.920	The 1/4 sec. cor. of secs. 11 and 12, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 36 N., R. 37 E., executed under Group No. 427, with a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor. <hr/> N. 1°14'20" E., beginning new measurement.
5.212	Intersect line 1-2, Mineral Survey No. 4025, A and T No. 1 lode, at a point from which Cor. No. 2, hereinafter described, bears N. 48°09'20" E., 6.285 chs. dist.
15.595	Intersect line 2-3, Mineral Survey No. 4025, A and T No. 1 lode, at a point from which Cor. No. 3, hereinafter described, bears N. 35°46'00" W., 1.512 chs. dist.
20.212	Point for the N 1/16 sec. cor. of secs. 11 and 12. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. N 1/16 S11 S12 2000
40.424	The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 36 N., R. 37 E., executed under Group No. 427. <hr/> From the 1/4 sec. cor. of secs. 1 and 12, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, and in a collar of stone, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 36 N., R. 37 E., executed under Group No. 427. S. 89°38'30" W., bet. secs. 1 and 12. Over mountainous land, covered with cheat grass and widely scattered sagebrush.
20.138	Point for the W 1/16 sec. cor. of secs. 1 and 12.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
40.276	<div style="text-align: center;"> <p>S 1 W 1/16 $\frac{\quad}{S12}$ 2000</p> </div> <p>The cor. of secs. 1, 2, 11 and 12.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4025, T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Mineral Surveyor H.H. Sheldon in 1911</p> <hr/> <p style="text-align: center;">A and T No. 1 Lode</p> <p>From Cor. No. 1, Mineral Survey No. 4025, A and T No. 1 lode, identical with Cor. No. 1, Mineral Survey No. 4025, A and T lode, monumented with a deeply embedded mound of stone, with the original wood post, 4 ins. squared, 3 ft. long, lying alongside, with scribe marks visible on one side mkd. "1 4025".</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p style="margin-left: 100px;">A&T NO 1 4025 1</p> <p style="margin-left: 100px;">1</p> <p style="margin-left: 100px;">4025 A&T</p> <p style="margin-left: 150px;">T36N R37E S11</p> <p style="margin-left: 100px;">2000</p> </div> <p>Thence N. 48°09'20" E., on line 1-2, Mineral Survey No. 4025, A and T No. 1 lode.</p>
12.30	Paved road, on curve, bears ENE. and WSW.
16.484	Intersect the line bet. secs. 11 and 12, at a point from which the 1/4 sec. cor. of secs. 11 and 12, hereinbefore described, bears S. 1°14'20" W., 5.212 chs. dist.
19.70	Paved road, on curve bears SE. and NW.

DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY NO. 4025,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA


CHAINS

22.769

Cor. No. 2, Mineral Survey No. 4025, A and T No. 1 lode, monumented with a deeply embedded mound of stone. This mound of stone correlates well with existing corners and is accepted as the best available evidence of the position of the original corner position.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top of brass cap, with brass cap mkd.

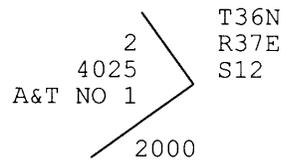

Thence N. 35°46'00" W. on line 2-3, Mineral Survey No. 4025, A and T No. 1 lode.

1.90

Paved road, on curve, bears ESE. and SW.

7.627


Intersect the line bet. secs. 11 and 12, at a point from which the N 1/16 sec. cor. of secs. 11 and 12, hereinbefore described, bears N. 1°14'20" E., 4.617 chs. dist.

9.139

Cor. No. 3, Mineral Survey No. 4025, A and T No. 1 lode, monumented with decayed remains of a wooden post, in a deeply embedded mound of stone.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.



SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

From the 1/4 sec. cor. of secs. 12 and 13.

N. 0°30'30" E., on the N-S center line of sec. 12.

Over mountainous land, covered with cheat grass and widely scattered sagebrush.

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
13.50	Power line, bears S. 56 1/4° E. and N. 56 1/4° W.
19.748	<p>Point for the C-S 1/16 sec. cor. of sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a collar of stone with brass cap mkd.</p>
	$\begin{array}{c} C \\ S\ 1/16 \left S12 \\ C \end{array}$ <p style="text-align: center;">2000</p>
21.80	Power line, bears S. 45° E. and N. 45° W.
22.30	Underground cable, parallels power line.
29.622	<p>Point for the C-N-S 1/64 sec. cor. of sec. 12.</p> <p>NOT MONUMENTED</p>
34.559	<p>Point for the C-N-N-S 1/256 sec. cor. of sec. 12.</p> <p>NOT MONUMENTED</p>
39.496	<p>Point for the center 1/4 sec. cor. of sec. 12, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T36N R37E</p> <p style="text-align: center;">C 1/4 S12</p> <p style="text-align: center;">2000</p>
	<p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p> <p>From this cor., the following facilities:</p> <p style="padding-left: 40px;">The most easterly cor. of a cinder block building, 20 X 10 ft., bears S. 16°45' W., 3.68 chs. dist., long side bears S. 42° W.</p> <p style="padding-left: 40px;">Center of dual wood pole antennas, 18 ins. diam., bears S. 25°35' W., 3.67 chs. dist.</p> <p style="padding-left: 40px;">The NE. cor. of a framed building, 20 X 15 ft., bears S. 25°38' W., 3.91 chs. dist., long side bears N. 76° W.</p> <p style="padding-left: 40px;">The SE. cor. of a concrete pad, 18 X 18 ft., with a metal girder antenna attached, bears S. 25°48' W., 3.84 chs. dist., sides bears N. 2° E., and N. 88° W.</p> <p style="padding-left: 40px;">The NW. cor. of a framed building, 28 X 10 ft., bears S. 39°11' W., 3.86 chs. dist., long side bears N. 82° E.</p>

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>The NW. cor. of a framed building, 28 x 8 ft., bears S. 40°03' W., 3.64 chs. dist., long side bears N. 82° E.</p> <p>The NW. cor. of a concrete generator pad, 8 x 4 ft., bears S. 41°43' W., 3.75 chs. dist., long side bears S. 7° E.</p>
44.532	<p>Point for the C-S-S-N 1/256 sec. cor. of sec. 12.</p> <p>POINT NOT MONUMENTED</p>
49.568	<p>Point for the C-S-N 1/64 sec. cor. of sec. 12.</p> <p>POINT NOT MONUMENTED</p>
59.640	<p>Point for the C-N 1/16 sec. cor. of sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>C N 1/16 S12 C</p> <p>2000</p> </div>
79.784	<p>The 1/4 sec. cor. of secs. 1 and 12.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of T. 36 N., R. 37 E., executed under Group No. 427.</p> <p>Cor. is located in fence, bears N. and S.</p> <p>S. 89°28'00" W., on the E-W center line of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
40.496	<p>The center 1/4 sec. cor. of sec. 12.</p>
45.596	<p>Point for the C-E-E-W 1/256 sec. cor. of sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>C-E-E-W 1/256 S12</p> <p>2000</p> </div> <p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p>
50.696	<p>Point for the C-E-W 1/64 sec. cor. of sec. 12.</p>

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	POINT NOT MONUMENTED
60.896	Point for the C-W 1/16 sec. cor. of sec. 12. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. <div style="text-align: center;"> W 1/16 C ——— C 2000 </div> Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.
62.90	Paved road, bears NNE. and SSW.
63.40	Power line, bears N. 19 1/2° E. and S. 19 1/2° W.
78.30	Paved road, bears NE. and SW.
81.294	The 1/4 sec. cor. of secs. 11 and 12. <hr/> From the W 1/16 sec. cor. of secs. 12 and 13. N. 0°49'00" E., on the N-S center line of the SW1/4 of sec. 12. Over mountainous land, covered with cheat grass and widely scattered sagebrush.
19.604	Point for the SW 1/16 sec. cor. of sec. 12, at intersection with the E-W center line of the SW1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top of brass cap, with brass cap mkd. <div style="text-align: center;"> SW 1/16 S12 2000 </div> From this cor., Angle Point No. 2, Parcel A, hereinafter described, bears N. 51°38'50" W., 6.827 chs. dist.
29.406	Point for the C-N-SW 1/64 sec. cor. of sec. 12. POINT NOT MONUMENTED
29.50	Power line, bears S. 55 1/2° E. and N. 55 1/2° W.
31.70	Underground cable, bears N. 89 1/2° E. and S. 89 1/2° W.
34.00	Underground cable, bears N. 70 1/4° E. and S. 70 1/4° W.
34.307	Point for the C-N-N-SW 1/256 sec. cor. of sec. 12.

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">C-N-N-SW 1/256 S12 2000</p> <p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p> <p>From this cor., the following facilities:</p> <p style="padding-left: 40px;">The most easterly cor. of a concrete pad, 14 x 14 ft., with metal girder antenna attached, bears S. 39°01' W., 10.61 chs. dist., sides bear S. 63° W. and N. 27° W.</p> <p style="padding-left: 40px;">The NE. cor. of a concrete pad, 16 X 10 ft., bears S. 39°27' W., 8.85 chs. dist., long side bears S. 9° W.</p> <p style="padding-left: 40px;">The NE. cor. of a cinder block building, 24 x 12 ft., bears S. 40°39' W., 9.18 chs. dist., long side bears N. 86° W.</p> <p style="padding-left: 40px;">A wood pole antenna, 18 ins. diam., bears S. 40°57' W., 9.67 chs. dist.</p> <p style="padding-left: 40px;">A wood pole antenna, 18 ins. diam., bears S. 42°16' W., 9.81 chs. dist.</p> <p style="padding-left: 40px;">The NE. cor. of a cinder block building, 24 x 12 ft., bears S. 42°32' W., 8.49 chs. dist., long side bears S. 17° W.</p> <p style="padding-left: 40px;">The most easterly cor. of a cinder block building, 30 x 15 ft., bears S. 43°26' W., 9.87 chs. dist., long side bears S. 43° W.</p>
34.60	Paved road, bears NE. and SW.
39.208	The C-W 1/16 sec. cor. of sec. 12.
	<hr/> <p>From the C-S 1/16 sec. cor. of sec. 12.</p> <p>S. 89°52'20" W., on the E-W center line of the SW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
6.40	Power line, bears S. 43° E. and N. 43° W.
10.251	Point for the C-E-SW 1/64 sec. cor. of sec. 12. POINT NOT MONUMENTED
20.502	The SW 1/16 sec. cor. of sec. 12.
41.004	The S 1/16 sec. cor. of secs. 11 and 12.

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>From the point for the C-E-SW 1/64 sec. cor. of sec. 12.</p> <p>N. 0°39'40" E., on the N-S center line of the NE1/4 of the SW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
3.90	Power line, bears S. 43° E. and N. 43° W.
9.838	Point for the NE-SW 1/64 sec. cor. of sec. 12, at intersection with the E-W center line of the NE1/4 of the SW1/4.
	POINT NOT MONUMENTED
12.20	Power line, bears S. 45° E. and N. 45° W.
12.40	Underground cable, bears N. 87 1/2° E. and S. 87 1/2° W.
14.757	Point for the C-N-NE-SW 1/256 sec. cor. of sec. 12, falls on rock outcropping.
	Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole, with brass cap mkd.
	C-N-NE-SW 1/256 S12
	2000
	Set a steel fence post, 5 ft. long, E. of brass tablet.
19.30	Paved road, bears NE. and SW.
19.676	The point for the C-E-W 1/64 sec. cor. of sec. 12.
	<hr/> <p>From the point for the C-N-S 1/64 sec. cor. of sec. 12.</p> <p>S. 89°40'10" W., on the E-W center line of the NE1/4 of the SW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
5.112	Point for the C-E-NE-SW 1/256 sec. cor. of sec. 12.
	POINT NOT MONUMENTED
7.40	Underground cable, bears S. 45° E. and N. 45° W.
7.90	Power line, parallels underground cable.
10.224	The point for the NE-SW 1/64 sec. cor. of sec. 12.
20.20	Power line, bears S. 55 1/2° E. and N. 55 1/2° W.
20.448	The point for the C-E-SW 1/64 sec. cor. of sec. 12.
	<hr/>

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	From the point for the C-E-NE-SW 1/256 sec. cor. of sec. 12. N. 0°35'10" E., on the N-S center line of the NE1/4 of the NE1/4 of the SW1/4 of sec. 12.
4.928	Point for the NE-NE-SW 1/256 sec. cor. of sec. 12, at intersection with the E-W center line of the NE1/4 of the NE1/4 of the SW1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top of brass cap, with brass cap mkd. NE-NE-SW 1/256 S12 2000
9.856	Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post. The C-E-E-W 1/256 sec. cor. of sec. 12.
5.106	From the point for the C-N-N-S 1/256 sec. cor. of sec. 12. S. 89°34'00" W., on the E-W center line of the NE1/4 of the NE1/4 of the SW1/4 of sec. 12. The NE-NE-SW 1/256 sec. cor. of sec. 12.
10.212	The C-N-NE-SW 1/256 sec. cor. of sec. 12. S. 89°34'00" W., on the E-W center line of the NW1/4 of the NE1/4 of the SW1/4 of sec. 12.
2.60	Power line, bears S. 45° E. and N. 45° W.
9.30	Underground cable, bears N. 70 1/4° E. and S. 70 1/4° W.
10.212	The C-N-N-SW 1/256 sec. cor. of sec. 12. From the C-W 1/16 sec. cor. of sec. 12. N. 0°52'30" E., on the N-S center line of the NW1/4 of sec. 12. Over mountainous land, covered with cheat grass and widely scattered sagebrush.
3.90	Paved road, bears NE. and SW.
5.00	Power line, bears N. 34 1/4° E. and S. 34 1/4° W.
5.044	Point for the C-S-S-NW 1/256 sec. cor. of sec. 12.

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">C-S-S-NW 1/256 S12 2000</p> <p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p> <p>10.00 Paved road, on curve, bears NNE. and SSW.</p> <p>10.088 Point for the C-S-NW 1/64 sec. cor. of sec. 12.</p> <p style="text-align: center;">POINT NOT MONUMENTED</p> <p>20.176 Point for the NW 1/16 sec. cor. of sec. 12, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S12 2000</p> <p>40.352 The W 1/16 sec. cor. of secs. 1 and 12.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 12.</p> <p>S. 89°33'00" W., on the E-W center line of the NW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p> <p>10.134 Point for the C-E-NW 1/64 sec. cor. of sec. 12.</p> <p style="text-align: center;">POINT NOT MONUMENTED</p> <p>11.08 Fence for communication site, bears N. 15 1/2° E., 0.033 chs. dist. to cor. of fences from which fences extend S. 15 1/2° W. and N. 80 3/4° W., and S. 15 1/2° W., 1.254 chs. dist. to cor. of fences from which fences extend N. 15 1/2° E. and N. 74° W.</p> <p>12.12 Fence for communication site, bears N. 15 1/2° E., 0.211 chs. dist. to cor. of fences from which fences extend S. 15 1/2° W. and S. 80 3/4° E., and S. 15 1/2° W., 0.032 chs. dist. to cor. of fences from which fences extend N. 15 1/2° E. and N. 75 1/2° W.</p> <p>12.25 Fence for communication site, bears S. 75 1/2° E., 0.121 chs. dist. to cor. of fences from which fences extend N. 15 1/2° E. and N. 75 1/2° W., and N. 75 1/2° W., 1.706 chs. dist. to cor. of fences from which fences extend S. 16° W. and S. 75 1/2° E.</p>
--------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
14.02	Fence for communication site, bears N. 16° E., 0.454 chs. dist. to cor. of fences from which fences extend S. 75 1/2° E. and S. 16° W., and S. 16° W., 0.417 chs. dist. to cor. of fences from which fences extend S. 74° E. and N. 16° E.
20.068	The NW 1/16 sec. cor. of sec. 12.
40.536	The N 1/16 sec. cor. of secs. 11 and 12.
	<hr/> <p>From the point for the C-E-W 1/64 sec. cor. of sec. 12.</p> <p>N. 0°41'30" E., on the N-S center line of the SE1/4 of the NW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
5.040	<p>Point for the C-S-SE-NW 1/256 sec. cor. of sec. 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">C-S-SE-NW 1/256 S12</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p>
10.080	<p>Point for the SE-NW 1/64 sec. cor. of sec. 12, at intersection with the E-W center line of the SE1/4 of the NW1/4.</p> <p>POINT NOT MONUMENTED</p>
20.160	The point for the C-E-NW 1/64 sec. cor. of sec. 12.
	<hr/> <p>From the point for the C-S-N 1/64 sec. cor. of sec. 12.</p> <p>S. 89°30'30" W., on the E-W center line of the SE1/4 of the NW1/4 of sec. 12.</p> <p>Over mountainous land, covered with cheat grass and widely scattered sagebrush.</p>
5.083	<p>Point for the C-E-SE-NW 1/256 sec. cor. of sec. 12.</p> <p>POINT NOT MONUMENTED</p>
10.166	The point for the SE-NW 1/64 sec. cor. of sec. 12.
16.40	Paved road, bears NE. and SW.
17.00	Power line, bears N. 26 1/4° E. and S. 26 1/4° W.

SUBDIVISION OF SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
20.30	Paved road, on curve, bears NNE. and SSW.
20.332	The point for the C-S-NW 1/64 sec. cor. of sec. 12.
	<hr/> <p>From the C-E-E-W 1/256 sec. cor. of sec. 12.</p> <p>N. 0°36'00" E., on the N-S center line of the SE1/4 of the SE1/4 of the NW1/4 of sec. 12.</p>
5.038	Point for the SE-SE-NW 1/256 sec. cor. of sec. 12, at intersection with the E-W center line of the SE1/4 of the SE1/4 of the NW1/4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top of brass cap, with brass cap mkd.
	<p style="text-align: center;">SE-SE-NW 1/256 S12</p> <p style="text-align: center;">2000</p>
	Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.
10.076	The point for the C-E-SE-NW 1/256 sec. cor. of sec. 12.
	<hr/> <p>From the point for the C-S-S-N 1/256 sec. cor. of sec. 12.</p> <p>S. 89°29'10" W., on the E-W center line of the SE1/4 of the SE1/4 of the NW1/4 of sec. 12.</p>
5.091	The SE-SE-NW 1/256 sec. cor. of sec. 12.
10.182	The C-S-SE-NW 1/256 sec. cor. of sec. 12.
	<hr/> <p>S. 89°29'10" W., on the E-W center line of the SW1/4 of the SE1/4 of the NW1/4 of sec. 12.</p>
9.40	Paved road, bears NE. and SW.
10.10	Power line, bears N. 34 1/4° E. and S. 34 1/4° W.
10.183	The C-S-S-NW 1/256 sec. cor. of sec. 12.
	<hr/>

METES-AND-BOUND SURVEY OF PARCEL A, IN SECTION 12,
T. 36 N., R. 37 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Thence N. 59°45'00" W., on line 2-3.</p>
0.946	<p>Point for Angle Point No. 3, Parcel A, determined at record bearing and distance. There is no remaining evidence of the position of the copper coated steel rod monument.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Set a steel fence post, 5 1/2 ft. long, alongside the stainless steel post.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>Thence N. 30°31'00" E., on line 3-4.</p>
3.048	<p>Point for Angle Point No. 4, Parcel A, determined at record bearing and distance. There is no remaining evidence of the position of the copper coated steel rod monument.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Set a steel fence post, 5 1/2 ft. long, 2 ft. northerly of the stainless steel post.</p> <p>Thence S. 54°53'00" E., on line 4-1.</p>
0.927	<p>Angle Point No. 1, Parcel A, and point of beginning.</p> <hr style="border: 0.5px solid black;"/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area resurveyed is located 2 miles NW. of Winnemucca, Nevada and straddles Winnemucca Mountain. The elevation ranges from about 5,050 ft. to 6,740 ft. above sea level. The vegetation consists of cheat grass and widely scattered sagebrush.</p> <p>Access to the area is via a paved road to the top of Winnemucca Mountain from U.S. Highway No. 95.</p> <p>There are numerous communications facilities at the top of Winnemucca Mountain. There has been some mineral activity on the flanks of Winnemucca Mountain.</p> <hr style="border: 0.5px solid black;"/>

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


FIELD ASSISTANTS

Richard L. Jones	Cadastral Surveyor
Clay W. Morrow	Surveying Technician
Sean C. Whelan	Survey Aid
John M. Connor	Survey Aid

CERTIFICATE OF SURVEY

I, Stephen R. Lambeth, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day of June, 2000, I have dependently resurveyed a portion of the subdivisional lines and a portion of Mineral Survey No. 4025, and subdivided section 12 and executed a metes-and-bounds survey of Parcel A in section 12, Township 36 North, Range 37 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 14, 2011
(Date)

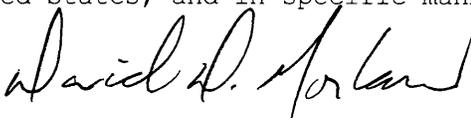

/For Stephen R. Lambeth
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of dependent resurvey of a portion of the subdivisional lines and a portion of Mineral Survey No. 4025, and the subdivision of section 12 and a metes-and-bounds survey of Parcel A in section 12, Township 36 North, Range 37 East, of the Mount Diablo Meridian, in the State of Nevada, executed by Stephen R. Lambeth, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

June 14, 2011
(Date)

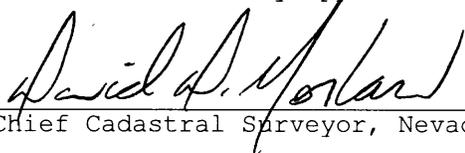
(Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in T. 36 N., R. 37 E., Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~_____~~
~~(Date)~~

~~_____~~
~~(Chief Cadastral Surveyor, Nevada)~~