

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SOUTH BOUNDARY,

PORTIONS OF THE EAST, WEST AND NORTH BOUNDARIES,

AND A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF CERTAIN SECTIONS,

TOWNSHIP 37 NORTH, RANGE 19 EAST,

OF THE MOUNT DIABLO MERIDIAN,

IN THE STATE OF NEVADA

EXECUTED BY

Thomas E. Casinger, Cadastral Surveyor

Under Special Instructions dated June 21, 1999,

approved June 21, 1999,

Amended and Supplemental Special Instructions dated August 28, 2000,

approved August 28, 2000,

and Amended Supplemental Instructions dated August 31, 2001,

approved August 31, 2001,

which provided for the surveys included under Group No. 784,

and Assignment Instructions dated June 21, 1999.

Survey commenced June 29, 1999

Survey completed May 23, 2001

INDEX DIAGRAM

TOWNSHIP 37 NORTH, RANGE 19 EAST

15	14	14	12		
6	50 5	41 4	34 3	2	1
49	49	40	33		
11	48 8	40 9	32 10	11	12
	48	47	39	31	
11				25	
18	46 17	38 16	30 15	24 14	20 13 9
	46	37	29	23	19
19	45 20	36 21	29 22	23 23	19 24 8
44	44	36	28	22	18
30	43 29	36 28	27 27	22 26	17 25 7
42	42	35	27	21	17
10					
31	41 32	35 33	26 34	20 35	16 36 6
5	4	4	3	2	2

Subdivision of Section 3 pp. 50-52
 Subdivision of Section 7 pp. 53-55
 Subdivision of Section 9 pp. 55-56
 Subdivision of Section 10 pp. 56-59
 Subdivision of Section 14 pp. 59-62
 Subdivision of Section 15 pp. 62-64
 Subdivision of Section 16 pp. 64-67
 Subdivision of Section 17 pp. 67-68
 Subdivision of Section 25 pp. 69-70
 Subdivision of Section 26 pp. 70-71
 Subdivision of Section 30 pp. 71-73
 Subdivision of Section 31 pp. 73-74

TOWNSHIP 37 NORTH, RANGE 19 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of the south boundary, portions of the east, west and north boundaries, and a portion of the subdivisional lines, and the subdivision of certain sections in Township 37 North, Range 19 East, Mount Diablo Meridian, Nevada.

The exterior boundaries and a portion of the subdivisional lines were surveyed by U.S. Deputy Surveyor G.W. Garside in 1880 under Contract No. 93. The east boundary was retraced by U.S. Deputy Surveyor F.G. Ward in 1882 under Contract No. 143. The corner of Townships 36 and 37 North, Ranges 18 and 19 East was remonumented in 1916 in the course of the dependent resurvey of the east boundary of Township 36 North, Range 18 East by U.S. Surveyor H.W. Reppert, and U.S. Surveyor and U.S. Cadastral Engineer E. Voigt under Group No. 45. The west boundary was dependently resurveyed by U.S. Surveyor H.W. Reppert and U.S. Transitman L.R. Mercer in 1917 under Group No. 52. Portions of the east and north boundaries and subdivisional lines were dependently resurveyed and a portion of the subdivisional were surveyed by U.S. Cadastral Engineer E. Voigt in 1922 under Group No. 87. A portion of the west boundary was resurveyed by Cadastral Surveyor N.R. Forsyth in 1973 under Group No. 502.

Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated June 21, 1999, Amended and Supplemental Special Instructions dated August 28, 2000, and Amended Supplemental Instructions dated August 31, 2001.

The direction of the lines of this survey refer to the true meridian as determined by use of Global Positioning System satellite data, using the real-time kinematic survey process.

The geographic position for southeast corner of the township, based on NAD 83 (1994) and determined by satellite positioning methods, is as follows:

Latitude: 41°02'12.094" N.

Longitude: 119°47'11.134" W.

The mean magnetic declination is 18° E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "JUNIPER SPRINGS, NEV.", dated 1980.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">Reestablishment of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880</p> <hr/> <p>Beginning at the cor. of Tps. 36 and 37 N., Rs. 19 and 20 E., monumented with a volcanic stone, 20x16 ins., firmly set, projecting 16 ins. above the ground, supported in a mound of stone, 3 1/2 ft. base, plainly mkd. with 6 grooves on the N., S., E. and W. faces.</p> <p>N. 88°29'40" W., bet. secs. 1 and 36.</p> <p>Over rolling and broken terrain.</p>
32.10	Ravine, drains SE.
34.85	Dirt road, 18 lks. wide, bears SE. and NW.
41.303	<p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S36 1/4 — S 1 T36N 2000</p>
82.606	<p>Point for the cor. of secs. 1, 2, 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S35 S36 — — S 2 S 1 T36N 2000</p> <p>Set a steel fence post alongside the stainless steel post.</p> <hr/> <p>N. 88°29'40" W., bet. secs. 2 and 35.</p> <p>Over rolling and broken terrain.</p>
41.303	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S35 1/4 — S 2 T36N 2000</p>
82.606	<p>Point for the cor. of secs. 2, 3, 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S34 S35 — — S 3 S 2 T36N 2000</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>From this point, a United States Geological Survey bench mark bears N. 74°26'50" W., 20.105 chs. dist., monumented with a standard brass tablet, 3 1/4 ins. diam., firmly set flush with the surface of the ground inside a fiberglass tube, 6 ins. diam., with top mkd. U.S.G.S. 4889 138 LRC 1972.</p>
	<p>N. 88°29'40" W., bet. secs. 3 and 34.</p> <p>Over rolling and broken terrain.</p>
23.40	<p>Dirt road, 18 lks. wide, bears N. 40° E. and S. 40° W.</p>
41.303	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S34 1/4 — S 3 T36N 2000</p>
82.606	<p>Set a steel fence post alongside stainless steel post.</p> <p>Point for the cor. of secs. 3, 4, 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S33 S34 ----- S 4 S 3 T36N</p> <p style="text-align: center;">2000</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr/>
	<p>N. 88°29'40" W., bet. secs. 4 and 33.</p> <p>Over nearly level terrain.</p>
41.303	<p>Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S33 1/4 ——— S 4 T36N</p> <p style="text-align: center;">2000</p>
54.40	<p>Washoe County Route 447, paved, 36 lks. wide, bears S. 35° E. and N. 35° W.</p>
82.606	<p>Point for the cor. of secs. 4, 5, 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S32 S33 ----- S 5 S 4 T36N</p> <p style="text-align: center;">2000</p> <hr/>
	<p>N. 88°29'40" W., bet. secs. 5 and 32.</p> <p>Over nearly level terrain.</p>
41.303	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S32 1/4 — S 5 T36N</p> <p style="text-align: center;">2000</p>
82.606	<p>Point for the cor. of secs. 5, 6, 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S31 S32 — — S 6 S 5 T36N</p> <p style="text-align: center;">2000</p> <p>From this point, a position established by person(s) unknown, bears S. 52°54' E., 7.17 chs. dist., monumented with a wooden post, 4 ins. square, firmly set, projecting 4 ft. above the ground, plainly mkd. with 5 notches on the E. edge and 1 notch on the W. edge. The wooden post does not have the appearance of an original wood post corner monument. It is the type of post more often used for a fence corner, and is not accepted during the course of this survey.</p>
	<p>N. 88°29'40" W., bet. secs. 6 and 31.</p> <p>Over nearly level terrain.</p>
41.303	<p>Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S31 1/4 — S 6 T36N</p> <p style="text-align: center;">2000</p>
81.935	<p>The cor. of Tps. 36 and 37 N., Rs. 18 and 19 E., identical with cor. No. 1, Tract No. 48, T. 36 N., R. 18 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 36 N., R. 18 E., executed under Group No. 45, with a steel fence post alongside.</p> <p>Cor. is located at the intersection of wire fences extending N. and E.</p>

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From this point, a position established by person(s) unknown, bears S. 41°02' E., 10.17 chs. dist., monumented with a wooden post, 4 ins. square, firmly set, projecting 4 ft. above the ground, no mks. visible. The wooden post does not have the appearance of an original wood post corner monument. It is the type of post more often used as a fence corner, and is not accepted during the course of this survey.</p>
	<p>DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p>
	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880, and a Portion of the Retracement Executed by U.S. Deputy Surveyor F.G. Ward in 1882</p>
	<p>From the cor. of Tps. 36 and 37 N., Rs. 19 and 20 E., hereinbefore described.</p> <p>N. 0°11'00" W., bet. secs. 31 and 36.</p> <p>Over mountainous terrain.</p>
40.708	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with a volcanic stone, 14x8x6 ins., firmly set in a mound of stone, plainly mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E R20E 1/4 S36 S31 2000</p>
	<p>Bury the original cornerstone alongside stainless steel post.</p> <p>N. 0°05'00" E., beginning new measurement.</p> <p>Over mountainous terrain.</p>
40.696	<p>The cor. of secs. 25, 30, 31 and 36, monumented with a volcanic stone, 16x12x8 ins., loosely set in a mound of stone, plainly mkd. with 5 grooves on the N. face and 1 groove on the S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T37N R19E R20E S25 S30 ----- S36 S31 1999
	Bury the original cornerstone alongside stainless steel post. Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
	N. 3°35'30" W., on the E. bdy. of sec. 25. Over mountainous terrain.
9.50	Lost Creek, 8 lks. wide, course S. 80° W.
15.00	Dirt road, 18 lks. wide, bears E. and W.
42.273	The 1/4 sec. cor. of sec. 25 only, monumented with a trapstone, 20x14x10 ins., loosely set in a mound of stone, 3 ft. base, 1 ft. high, plainly mkd. 1/4 on the W. face. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.
	T37N R19E R20E 1/4 S25 1999
	Bury the original cornerstone alongside stainless steel post. Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
	N. 2°45'50" W., beginning new measurement. Over mountainous terrain.
23.50	Gravel road, 24 lks. wide, bears S. 70° E. and N. 70° W.
39.556	From this point, the closing cor. of secs. 19 and 30, T. 37 N., R. 20 E., bears EAST, 0.029 chs. dist., monumented with a trapstone, 20x12x6 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, dimly mkd. CC and no other mks. visible.
43.163	The cor. of secs. 24 and 25 only, monumented with a trapstone, 16x10x8 ins., loosely set in a mound of stone, 3 ft. base, 1 1/2 ft. high, plainly mkd. with 4 grooves on the N. face and 2 notches on the S. edge. At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS																
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td></td><td>T37N</td><td></td></tr> <tr><td>R19E</td><td>R20E</td><td></td></tr> <tr><td>S24</td><td> </td><td>S19</td></tr> <tr><td>—</td><td> </td><td></td></tr> <tr><td>S25</td><td> </td><td></td></tr> </table> <p>1999</p> <p>Bury the original cornerstone alongside stainless steel post.</p> <p>From this point, a United States Geological Survey bench mark bears S. 9°43'20" E., 19.877 chs. dist., monumented with a standard brass tablet, 3 1/4 ins. diam., firmly set flush with the surface of the ground inside a fiberglass tube, 6 ins. diam., with top mkd. U.S.G.S. 5206 134 LRC 1972.</p> <hr/> <p>N. 2°36'30" W., on the E. bdy. of sec. 24.</p> <p>Over rolling and broken terrain.</p> </div>		T37N		R19E	R20E		S24		S19	—			S25		
	T37N															
R19E	R20E															
S24		S19														
—																
S25																
42.135	<p>The 1/4 sec. cor. of sec. 24 only, monumented with a volcanic stone, 15x11x8 ins., firmly set in a mound of stone, plainly mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td></td><td>T37N</td><td></td></tr> <tr><td>R19E</td><td>R20E</td><td></td></tr> <tr><td>1/4</td><td> </td><td></td></tr> <tr><td>S24</td><td> </td><td></td></tr> </table> <p>2000</p> <p>Bury the original cornerstone alongside stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr/> <p>N. 2°54'00" W., beginning new measurement.</p> <p>Over mountainous terrain.</p> </div>		T37N		R19E	R20E		1/4			S24					
	T37N															
R19E	R20E															
1/4																
S24																
35.549	<p>From this point, the closing cor. of secs. 18 and 19, T. 37 N., R. 20 E., bears EAST, 0.061 chs. dist., monumented with a volcanic stone, 18x10x8 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, mkd. CC and no other mks. visible.</p>															
42.102	<p>The cor. of secs. 13 and 24 only, monumented with a trapstone, 16x14x10 ins., loosely set 3 ins. in the ground, plainly mkd. with 3 grooves on the N. face and 3 grooves on the S. face.</p> <p>At the corner point</p>															

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E R20E S13 ----- S18 S24 </p> <p style="text-align: center;">1999</p> <p>Bury the original cornerstone and set a steel fence post alongside stainless steel post.</p> <hr/> <p>N. 2°52'30" W., on the E. bdy. of sec. 13.</p> <p>Over mountainous terrain.</p> <p>41.671 Point for the 1/4 sec. cor. of sec. 13 only, at proportionate distance by the method of irregular boundary adjustment; there is no remaining evidence of the original corner.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2-in. stem, in drill hole of rock outcrop, encased in concrete, with top mkd.</p> <p style="text-align: center;">T37N R19E R20E 1/4 S13 </p> <p style="text-align: center;">2000</p> <hr/> <p>N. 2°48'20" W., beginning new measurement.</p> <p>Over mountainous terrain.</p> <p>3.00 Enter rolling terrain.</p> <p>31.713 From this point, the closing cor. of secs. 7 and 18, T. 37 N., R. 20 E., bears EAST, 0.050 chs. dist., monumented with a volcanic stone, 20x14x10 ins., loosely set in a mound of stone, mkd. with 2 grooves on the N. face, 4 notches on the S. edge and CC on the W. face.</p> <p>41.010 The cor. of secs. 12 and 13 only, monumented with a volcanic stone, 20x14x12 ins., loosely set 4 ins. in the ground, in a mound of stone, plainly mkd. with 2 grooves on the N. face and 4 grooves on the S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
---------------	--

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;"> <p>T37N R19E R20E S12 ----- S 7 S13 </p> <p>2000</p> </div> <p>Bury the original cornerstone alongside stainless steel post. Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF PORTIONS OF THE WEST BOUNDARY, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of Portions of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880, Portions of the Dependent Resurvey Executed by U.S. Surveyor H.W. Reppert and U.S. Transitman L.R. Mercer in 1917 and the Dependent Resurvey Executed by Cadastral Surveyor N.R. Forsyth in 1973</p> <hr/> <p>From the 1/4 sec. cor. of secs. 31 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52.</p> <p>From this cor., the corner of wire fences extending S. and W. bears S. 33°07' W., 1.10 chs. dist.</p> <p>From this same cor., a position established by person(s) unknown, bears N. 10°17'50" W., 6.290 chs. dist., monumented with a rebar, 1/2 in. diam., firmly set, projecting 12 ins. above the ground, with a trapstone, 14x12x6 ins., laying loose alongside, plainly mkd. 1/4 WC.</p> <p>N. 0°15'10" W., bet. secs. 31 and 36.</p> <p>Over dry bed of Duck Lake.</p>
20.157	<p>Point for the N 1/16 sec. cor. of secs. 31 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
40.314	<div style="text-align: center;"> <p>N 1/16 S36 S31</p> <p>2000</p> </div> <p>The cor. of secs. 25, 30, 31 and 36, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52, with a steel fence post alongside.</p> <hr/>

DEPENDENT RESURVEY OF PORTIONS OF THE WEST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS											
	<p>From the 1/4 sec. cor. of secs. 13 and 18, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52.</p> <p>Cor. is located in wire fence, bears irregularly N. and S.</p> <p>N. 0°15'50" W., bet. secs. 13 and 18.</p> <p>Over nearly level terrain, along fence.</p>										
3.90	Cor. of wire fences extending N., E. and S.										
8.35	Rock fence, 2 ft. wide, 2 ft. high, bears S. 30° E. and N. 30° W.										
12.90	Ditch, 10 lks. wide, course NW.; enter cultivated field.										
40.10	Canal, 8 lks. wide, drains N. 35° E.										
40.236	<p>Point for the cor. of secs. 7, 12, 13 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td colspan="2">T37N</td></tr> <tr><td>R18E</td><td>R19E</td></tr> <tr><td>S12</td><td>S 7</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S13</td><td>S18</td></tr> </table> <p>2000</p> </div>	T37N		R18E	R19E	S12	S 7	<hr/>		S13	S18
T37N											
R18E	R19E										
S12	S 7										
<hr/>											
S13	S18										
	<hr/> <p>N. 0°15'50" W., bet. secs. 7 and 12.</p> <p>Over cultivated field.</p>										
0.20	Wire fence, bears N. 35° E. and S. 35° W.										
15.00	Leave cultivated field; enter nearly level terrain.										
28.50	Wire fence, bears SE. and NW.										
40.236	<p>The 1/4 sec. cor. of secs. 7 and 12, monumented with an iron post, 1 in. diam., firmly set, 2 ins. below the surface of the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52.</p> <p>Set a steel fence post alongside iron post.</p>										
	<hr/> <p>N. 0°22'10" W., beginning new measurement.</p> <p>Over nearly level terrain.</p>										
11.50	Dirt road, 18 lks. wide, bears S. 60° E. and N. 60° W.										

DEPENDENT RESURVEY OF PORTIONS OF THE WEST BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 20.149</p>	<p>Point for the N 1/16 sec. cor. of secs. 7 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S12 S 7</p> <p style="text-align: center;">2000</p>
<p>40.298</p>	<p>The cor. of secs. 1, 6, 7 and 12, monumented with a deteriorating iron post, 2 ins. diam., 24 ins. long, firmly set, projecting 12 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52.</p> <p>Cor. is located at the intersection of wire fences extending E. and S. 35° W.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R18E R19E S 1 S 6 ----- S12 S 7</p> <p style="text-align: center;">1999</p> <p>Insert the iron post inside stainless steel post.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880</p> <hr/> <p>From the cor. of secs. 2, 3, 34 and 35, monumented with a trapstone, 17x10x8 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 ft. high, plainly mkd. with 2 grooves on the E. face and 4 grooves on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R19E S34 S35 ----- S 3 S 2 T37N</p> <p style="text-align: center;">1999</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Bury original cornerstone alongside stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>S. 89°46'00" W., bet. secs. 3 and 34.</p> <p>Over rolling and broken terrain.</p>
39.662	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R19E S34 1/4 — S 3 T37N 1999</p>
42.75	<p>Wall Creek, 30 lks. wide, course S. 20° E.</p>
59.493	<p>Point for the W 1/16 sec. cor. of secs. 3 and 34.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S34 W 1/16 — S 3 1999</p>
79.324	<p>The cor. of secs. 3, 4, 33 and 34, monumented with a basalt stone, 15x14x10 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 ft. high, plainly mkd. with 3 grooves on the E. face and 3 grooves on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S33 S34 — — S 4 S 3 T37N 1999</p> <p>Bury original cornerstone alongside stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 ft. high, W. of cor.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>S. 88°22'50" W., bet. secs. 4 and 33.</p> <p>Over rolling and broken terrain.</p>						
39.544	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with a trapstone, 15x8x6 ins., laying loose in a scattered mound of stone, plainly mkd. 1/4 on a face. Accepted base of stone as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T38N R19E</p> <p>S33</p> <p>1/4 —</p> <p>S 4</p> <p>T37N</p> <p>2000</p> </div> <p>Bury original cornerstone alongside stainless steel post.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 88°58'00" W., beginning new measurement.</p> <p>Over rolling and broken terrain.</p>						
37.50	<p>Wire fence, bears N. and S.</p>						
40.123	<p>The cor. of secs. 4, 5, 32 and 33, monumented with a trapstone, 14x6x5 ins., laying loose, plainly mkd. with 4 grooves and 2 grooves on opposite faces, with a scattered mound of stone N. of cor. Accepted base of stone as the best available evidence of the original corner position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T38N R19E</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S32</td> <td style="padding: 0 5px;">S33</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 5</td> <td style="padding: 0 5px;">S 4</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">T37N</td> </tr> </table> <p>1999</p> </div> <p>Bury original cornerstone alongside stainless steel post.</p> <p>Rebuild mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 88°28'30" W., bet. secs. 5 and 32.</p> <p>Over rolling terrain.</p>	S32	S33	S 5	S 4	T37N	
S32	S33						
S 5	S 4						
T37N							

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 39.656</p>	<p>The 1/4 sec. cor. of secs. 5 and 32, monumented with a trapstone, 14x10x8 ins., loosely set in a mound of stone, plainly mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R19E S32 1/4 — S 5 T37N</p> <p style="text-align: center;">2000</p> <p>Bury original cornerstone alongside stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 88°35'00" W., beginning new measurement.</p> <p>Over rolling terrain.</p>
<p>39.00</p>	<p>Ravine, drains S. turning SW.</p>
<p>39.774</p>	<p>The cor. of secs. 5, 6, 31 and 32, monumented with a trapstone, 18x16x8 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 ft. high, plainly mkd. with 5 grooves on the E. face and 1 groove on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R19E S31 S32 — — S 6 S 5 T37N</p> <p style="text-align: center;">2001</p> <p>Bury original cornerstone alongside stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 20%; margin: auto;"/>
<p>40.582</p>	<p>S. 89°56'30" W., bet. secs. 6 and 31.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T38N R19E S31 1/4 ——— S 6 T37N 2000
42.10	Gravel road, 36 lks. wide, bears N. 70° E. and S. 70° W.
80.758	The cor. of Tps. 37 and 38 N., Rs. 18 and 19 E., monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, 3 ft. base, to top, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the N. bdy. of T. 37 N., R. 18 E., executed under Group No. 502.
<hr/> DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/> Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880, and a Portion of the Dependent Resurvey Executed by U.S. Cadastral Engineer E. Voigt in 1922 <hr/> From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described. N. 0°18'50" W., bet. secs. 35 and 36. Over rolling terrain.	
41.231	Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T37N R19E 1/4 S35 S36 2000
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
56.20	Wire fence, bears S. 60° E. and N. 60° W.
75.50	Wire fence, bears N. 22° E. and S. 22° W.
82.462	Point for the cor. of secs. 25, 26, 35 and 36, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S26 S25 ----- S35 S36 2000</p> <hr/> <p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 87°46'20" W., bet. secs. 25 and 36.</p> <p>Over rolling and broken terrain.</p>
41.500	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S25 1/4 ----- S36 2000</p> <p>Set a steel fence post alongside stainless steel post.</p>
80.25	Wire fence, bears N. 22° E. and S. 22° W.
83.000	The cor. of secs. 25, 26, 35 and 36.
	<hr/> <p>N. 2°57'10" W., bet. secs. 25 and 26.</p> <p>Over rolling and broken terrain.</p>
20.642	<p>Point for the S 1/16 sec. cor. of secs. 25 and 26.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">S 1/16 S26 S25 2000</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
21.30	Lost Creek, 20 lks. wide, course irregularly NW.
25.35	Dirt road, 18 lks. wide, bears S. 45° E. and N. 40° W.
31.90	Old channel of Lost Creek, 3 lks. wide, course irregularly NW.
32.40	Dirt road, 12 lks. wide, bears S. 50° E. and N. 70° W.
36.70	Wire fence, bears S. 73° E. and N. 73° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 41.284</p>	<p>Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S26 S25</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <p>From this point, a United States Geological Survey bench mark bears N. 42°47'30" E., 10.784 chs. dist., monumented with a standard brass tablet, 3 1/4 ins. diam., firmly set flush with the surface of the ground, encircled in a fiberglass tube, 6 ins. diam., with top mkd. U.S.G.S. 5032 135 LRC 1972.</p>
<p>47.95</p>	<p>Gravel road, 36 lks. wide, bears N. 80° E. and S. 80° W.</p>
<p>82.568</p>	<p>Point for the cor. of secs. 23, 24, 25 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S23 S24 ----- S26 S25</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <hr/> <p>From the cor. of secs. 24 and 25 only, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°43'50" W., bet. secs. 24 and 25.</p> <p>Over rolling and broken terrain.</p>
<p>41.221</p>	<p>Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S24 1/4 ----- S25</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 82.442</p>	<p>The cor. of secs. 23, 24, 25 and 26.</p> <hr/>
	<p>N. 2°19'00" W., bet. secs. 23 and 24. Over rolling and broken terrain.</p>
<p>41.264</p>	<p>Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S23 S24 2000</p>
	<p>Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.</p>
<p>82.528</p>	<p>Point for the cor. of secs. 13, 14, 23 and 24, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S14 S13 <hr/>S23 S24 2000</p>
	<p>Set a steel fence post alongside stainless steel post.</p>
	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr/>
	<p>From the cor. of secs. 13 and 24 only, on the E. bdy. of the Tp., hereinbefore described. S. 89°05'40" W., bet. secs. 13 and 24. Over rolling and broken terrain.</p>
<p>40.861</p>	<p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S13 1/4 — S24 2000</p>
	<p>Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 81.722	The cor. of secs. 13, 14, 23 and 24.
	N. 3°47'00" W., bet. secs. 13 and 14. Over rolling and broken terrain.
20.660	Point for the S 1/16 sec. cor. of secs. 13 and 14. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. S 1/16 S14 S13 2000
41.320	Point for the 1/4 sec. cor. of secs. 13 and 14, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd. T37N R19E 1/4 S14 S13 1999
	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
61.980	Point for the N 1/16 sec. cor. of secs. 13 and 14. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. N 1/16 S14 S13 2000
	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.
82.640	The cor. of secs. 13 and 14 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines executed under Group No. 87, with a mound of stone, 2 ft. base, 1 ft. high, S. of cor.
	From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described. N. 0°06'10" W., bet. secs. 34 and 35. Over rolling terrain.
30.50	Dirt road, 18 lks. wide, bears N. 40° E. and S. 40° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 40.765	<p>Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S34 S35</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <p>From this point, a United States Geological Survey bench mark bears N. 50°37'40" E., 27.788 chs. dist., monumented with a standard brass tablet, 3 1/4 ins. diam., firmly set flush with the surface of the ground, encircled in a fiberglass tube, 6 ins. diam., with top mkd. U.S.G.S. 4981 137 LRC 1972.</p>
81.530	<p>Point for the cor. of secs. 26, 27, 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S27 S26 ----- S34 S35</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <hr/> <p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>N. 89°08'10" W., bet. secs. 26 and 35.</p> <p>Over rolling terrain.</p>
18.10	Wire fence, bears N. 8° E. and S. 8° W.
20.566	<p>Point for the E 1/16 sec. cor. of secs. 26 and 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">E 1/16 $\frac{S26}{S35}$</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p>
23.70	Dirt, road, 18 lks. wide, bears S. 15° E. and N. 15° W.
39.80	Dirt road, 18 lks. wide, bears N. 30° E. and S. 30° W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 41.132</p>	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S26 1/4 — S35 2000</p>
<p>82.264</p>	<p>The cor. of secs. 26, 27, 34 and 35.</p> <hr/> <p>N. 2°19'00" W., bet. secs. 26 and 27.</p> <p>Over rolling terrain.</p>
<p>40.798</p>	<p>Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S27 S26 2000</p>
<p>81.596</p>	<p>Set a steel fence post alongside stainless steel post.</p> <p>Point for the cor. of secs. 22, 23, 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S22 S23 — — S27 S26 2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <hr/>
<p>40.638</p>	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 89°47'00" W., bet. secs. 23 and 26.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S23 1/4 — S26</p> <p style="text-align: center;">2000</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
72.00	Gravel road, 18 lks. wide, bears S. 55° E. and N. 55° W.
77.10	Lost Creek, 10 lks. wide, course N. 50° W.
81.276	The cor. of secs. 22, 23, 26 and 27.
	<hr/> <p>N. 2°04'30" W., bet. secs. 22 and 23.</p> <p>Over rolling terrain.</p>
0.50	Lost Creek, 10 lks. wide, course S. 77° W.
4.30	Gravel road, 18 lks. wide, bears S. 70° E. and N. 70° W.
40.791	Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S22 S23</p> <p style="text-align: center;">2000</p>
80.30	Ravine, drains WSW.
81.582	Point for the cor. of secs. 14, 15, 22 and 23, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S15 S14 — — S22 S23</p> <p style="text-align: center;">2000</p> <p>Set a steel fence post alongside stainless steel post.</p>
	<hr/> <p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>S. 89°33'40" W., bet. secs. 14 and 23.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Over rolling terrain.
20.221	Point for the E 1/16 sec. cor. of secs. 14 and 23.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	21 ins. in the ground, over a plastic-encased magnet, with brass
	cap mkd.
	<div style="text-align: center;"> S14 E 1/16 ——— S23 2000 </div>
	Set a steel fence post alongside stainless steel post.
40.442	Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate
	distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	18 ins. in the ground, over a plastic-encased magnet and in a
	collar of stone, with brass cap mkd.
	<div style="text-align: center;"> T37N R19E S14 1/4 ——— S23 2000 </div>
	Set a steel fence post alongside stainless steel post.
77.40	Ravine, drains SW.
80.884	The cor. of secs. 14, 15, 22 and 23.
	<hr/> N. 4°41'10" W., bet. secs. 14 and 15.
	Over rolling terrain.
20.451	Point for the S 1/16 sec. cor. of secs. 14 and 15.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	12 ins. in the ground, over a plastic-encased magnet and in a
	mound of stone, 4 ft. base, to top, with brass cap mkd.
	<div style="text-align: center;"> S 1/16 S15 S14 2000 </div>
34.80	Cherry Creek, 4 lks. wide, course W.
36.10	Dirt road, 18 lks. wide, bears E. and W.
40.902	Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate
	distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	24 ins. in the ground, over a plastic-encased magnet, with brass
	cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E 1/4 S15 S14 2000</p>
61.353	<p>Point for the N 1/16 sec. cor. of secs. 14 and 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">N 1/16 S15 S14 2000</p>
64.10	Ravine, drains S. 50° W.
81.72	Wire fence, bears E. and W.
81.804	<p>The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 20 ins. above the ground, in a collar of stone, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines executed under Group No. 87, with a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p> <hr/> <p>From the cor. of secs. 13 and 14 only.</p> <p>S. 88°45'20" W., on the N. bdy. of sec. 14.</p> <p>Over rolling and broken terrain.</p>
0.75	Cherry Creek, 2 lks. wide, course S. 30° W.
20.599	<p>Point for the E 1/16 sec. cor. of sec. 14 only.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <hr/> <p style="text-align: center;">E 1/16 S14 2000</p>
23.10	Wire fence, bears S. 45° E. and N. 45° W.; thence over rolling terrain along nearby fence, bears E. and W.
36.606	<p>The 1/4 sec. cor. of sec. 11 only, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 2 1/2 ft. base, 1 ft. high, with brass cap mkd. as describe in the field notes of the dependent resurvey of a portion of the subdivisional lines executed under Group No. 87.</p> <p>Cor. is located 10 lks. N. of wire fence, bears E. and W.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>S. 89°11'10" W., beginning new measurement.</p> <p>Over rolling terrain.</p>
4.592	<p>The 1/4 sec. cor. of sec. 14 only, monumented with a trapstone, 20x10x10 ins., firmly set 12 ins. in the ground, plainly mkd. 1/4 on the S. face, with a mound of stone, 2 1/2 ft. base, 2 ft. high, S. of cor.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">————— 1/4 S14 T37N R19E</p>
	<p style="text-align: center;">1999</p>
	<p>Bury the original cornerstone alongside stainless steel post.</p> <p>Cor. is located 10 lks. N. of wire fence, bears E. and W.</p>
	<p style="text-align: center;">—————</p>
	<p>S. 89°01'50" W., beginning new measurement.</p>
	<p>Over rolling terrain.</p>
20.455	<p>Point for the W 1/16 sec. cor. of sec. 14 only.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">————— W 1/16 S14 2000</p>
	<p>Cor. is located 2 lks. S. of wire fence, bears E. and W.</p>
40.910	<p>The cor. of secs. 10, 11, 14 and 15.</p>
	<p style="text-align: center;">—————</p> <p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°16'10" W., bet. secs. 33 and 34.</p>
	<p>Over gently rolling terrain.</p>
40.347	<p>Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E 1/4 S33 S34 2000</p>
80.694	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S28 S27 ----- S33 S34 2000</p> <p>Set a steel fence post alongside stainless steel post.</p> <hr/>
	<p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 89°04'30" W., bet. secs. 27 and 34.</p> <p>Over gently rolling terrain.</p>
41.401	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S27 1/4 ——— S34 2000</p> <p>Set a steel fence post alongside stainless steel post.</p>
82.802	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/>
	<p>N. 1°53'50" W., bet. secs. 27 and 28.</p> <p>Over nearly level terrain.</p>
40.369	<p>Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E 1/4 S28 S27</p> <p style="text-align: center;">2000</p>
	<p>Set a steel fence post alongside stainless steel post.</p>
78.50	<p>Lost Creek, 10 lks. wide, course irregularly W.</p>
80.738	<p>Point for the cor. of secs. 21, 22, 27 and 28, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S21 S22</p>
	<p style="text-align: center;">S28 S27</p>
	<p style="text-align: center;">2000</p>
	<p>Set a steel fence post alongside stainless steel post.</p>
	<p>From this point, a project marker bears S. 78°28'50" W., 11.660 chs. dist., monumented with a galvanized post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with an aluminum cap, 3 3/4 ins. diam., mkd. DOUBLE SHOT RES 316 NW NE SEC 28 T37N R19E 1976.</p>
	<hr/> <p>From the cor. of secs. 22, 23, 26 and 27.</p>
	<p>N. 89°39'10" W., bet. secs. 22 and 27.</p>
	<p>Over gently rolling terrain.</p>
1.90	<p>Lost Creek, 10 lks. wide, course irregularly W.</p>
41.079	<p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S22</p>
	<p style="text-align: center;">1/4 ——— S27</p>
	<p style="text-align: center;">2000</p>
	<p>Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.</p>
75.00	<p>Lost Creek, 10 lks. wide, course S. 75° W.</p>
82.158	<p>The cor. of secs. 21, 22, 27 and 28.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	N. 1°43'20" W., bet. secs. 21 and 22. Over nearly level terrain.
40.365	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd. T37N R19E 1/4 S21 S22 2000 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
52.85	Gravel road, 36 lks. wide, bears S. 60° E. and N. 60° W.
72.00	Dirt road, 18 lks. wide, bears NE. and SW.
80.730	Point for the cor. of secs. 15, 16, 21 and 22, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T37N R19E S16 S15 S21 S22 2000 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
20.403	From the cor. of secs. 14, 15, 22 and 23. S. 89°45'50" W., bet. secs. 15 and 22. Over gently rolling terrain. Point for the E 1/16 sec. cor. of secs. 15 and 22. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. E 1/16 — S15 S22 2000 Set a steel fence post alongside stainless steel post.
40.806	Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T37N R19E S15 1/4 — S22 2000</p>
	Set a steel fence post alongside stainless steel post.
66.50	Dirt road, 18 lks. wide, bears NE. and SW.
81.612	The cor. of secs. 15, 16, 21 and 22.
	<hr/> <p>N. 3°06'20" W., bet. secs. 15 and 16. Over rolling terrain.</p>
20.203	Point for the S 1/16 sec. cor. of secs. 15 and 16.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">S 1/16 S16 S15 2000</p>
	Set a steel fence post alongside stainless steel post.
40.406	Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T37N R19E 1/4 S16 S15 2000</p>
56.50	Cherry Creek, 6 lks. wide, course N. 60° W.
60.609	Point for the N 1/16 sec. cor. of secs. 15 and 16.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">N 1/16 S16 S15 2000</p>
72.40	Dirt road, 15 lks. wide, bears SE. and NW.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 80.812</p>	<p>The cor. of secs. 9, 10, 15 and 16, determined in the center of a scattered mound of stone, with a trapstone, 16x8x5 ins., laying loose on top, no mks. visible. This is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T37N R19E</td></tr> <tr><td>S 9</td><td>S10</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S16</td><td>S15</td></tr> </table> <p>1999</p> </div> <p>Bury the unmkd. stone alongside stainless steel post.</p> <p>From this cor., the corner of wire fences extending E. and S. bears S. 63°29' E., 0.59 chs. dist.</p>	T37N R19E		S 9	S10	<hr/>		S16	S15
T37N R19E									
S 9	S10								
<hr/>									
S16	S15								
<p>39.648</p>	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 89°09'00" W., bet. secs. 10 and 15.</p> <p>Over rolling terrain, along nearby wire fence, bears E. and W.</p> <p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T37N R19E</td></tr> <tr><td colspan="2">S10</td></tr> <tr><td>1/4</td><td><hr/></td></tr> <tr><td colspan="2">S15</td></tr> </table> <p>1999</p> </div> <p>Cor. is located 17 lks. N. of wire fence, bears E. and W.</p>	T37N R19E		S10		1/4	<hr/>	S15	
T37N R19E									
S10									
1/4	<hr/>								
S15									
<p>59.472</p>	<p>Point for the W 1/16 sec. cor. of secs. 10 and 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">S10</td></tr> <tr><td>W 1/16</td><td><hr/></td></tr> <tr><td colspan="2">S15</td></tr> </table> <p>1999</p> </div> <p>Cor. is located 22 lks. N. of wire fence, bears E. and W.</p>	S10		W 1/16	<hr/>	S15			
S10									
W 1/16	<hr/>								
S15									
<p>79.296</p>	<p>The cor. of secs. 9, 10, 15 and 16.</p>								

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 2°49'10" W., bet. secs. 9 and 10.</p> <p>Over rolling terrain.</p>
14.000	<p>Point selected for the witness corner to the S 1/16 sec. cor. of secs. 9 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">WC S 1/16 ↑ S 9 S10 1999</p>
14.30	<p>Set a steel fence post alongside stainless steel post.</p> <p>Southerly shore of Lower Wall Canyon Reservoir, bears N. 50° E. and S. 50° W.; across water.</p>
20.286	<p>True point for the S 1/16 sec. cor. of secs. 9 and 10; falls in reservoir where it is impractical to establish a permanent monument.</p>
37.60	<p>Northerly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; enter rolling and broken terrain.</p>
40.572	<p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S 9 S10 1999</p>
60.858	<p>Point for the N 1/16 sec. cor. of secs. 9 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">N 1/16 S 9 S10 1999</p>
81.144	<p>The cor. of secs. 3, 4, 9 and 10, monumented with a trapstone, 16x12x10 ins., loosely set in a mound of stone, 2 1/2 ft. base, 1 ft. high, dimly mkd. with 3 notches on E. edge, no other mks. visible.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS																
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T37N</td><td>R19E</td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 9</td><td>S10</td></tr> </table> <p style="text-align: center;">1999</p> <p>Bury the original cornerstone and set a steel fence post alongside stainless steel post.</p>	T37N	R19E	S 4	S 3			S 9	S10							
T37N	R19E															
S 4	S 3															
S 9	S10															
	<p>From the cor. of secs. 3 and 10 only, monumented with a trapstone, 14x9x8 ins., firmly set 8 ins. in the ground, plainly mkd. with 2 grooves on the E. face and 5 grooves on the S. face, with a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of the cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T37N</td><td> </td><td></td></tr> <tr><td>S 3</td><td> </td><td></td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td><td>S11</td></tr> <tr><td>S10</td><td> </td><td></td></tr> <tr><td>R19E</td><td> </td><td></td></tr> </table> <p style="text-align: center;">1999</p> <p>Bury the original cornerstone alongside stainless steel post.</p> <p>N. 89°21'50" W., bet. secs. 3 and 10.</p> <p>Over rolling and broken terrain.</p>	T37N			S 3					S11	S10			R19E		
T37N																
S 3																
		S11														
S10																
R19E																
42.192	<p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T37N</td><td>R19E</td></tr> <tr><td>S 3</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S10</td><td></td></tr> </table> <p style="text-align: center;">1999</p> <p>Set a steel fence post alongside stainless steel post.</p>	T37N	R19E	S 3		1/4	—	S10								
T37N	R19E															
S 3																
1/4	—															
S10																
46.70	<p>Wall Creek, 20 lks. wide, course irregularly SSW.</p>															
63.288	<p>Point for the W 1/16 sec. cor. of secs. 3 and 10.</p>															

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 3 W 1/16 ——— S10 1999</p>
84.384	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of cor. The cor. of secs. 3, 4, 9 and 10.</p> <hr/>
42.138	<p>N. 0°05'20" E., bet. secs. 3 and 4. Over rolling and broken terrain. The 1/4 sec. cor. of secs. 3 and 4, monumented with a volcanic stone, 16x10x8 ins., loosely set in a mound of stone, no mks. visible.</p>
	<p>At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S 4 S 3 1999</p>
	<p>Bury the unmkd. stone and set a steel fence post alongside the stainless steel post.</p> <hr/>
21.028	<p>N. 6°26'20" E., beginning new measurement. Over rolling and broken terrain. Point for the N 1/16 sec. cor. of secs. 3 and 4.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 4 S 3 1999</p>
42.950	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor. The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 0°03'10" W., bet. secs. 32 and 33.</p>
	<p>Over nearly level terrain.</p>
39.15	<p>Washoe County Route 447, paved, 36 lks. wide, bears S. 35° E. and N. 35° W.</p>
40.930	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S32 S33 2000</p>
81.860	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S29 S28 ----- S32 S33 2000</p>
	<p>From the cor. of secs. 27, 28, 33 and 34.</p>
	<p>N. 87°40'30" W., bet. secs. 28 and 33.</p>
	<p>Over nearly level terrain.</p>
41.161	<p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S28 1/4 ——— S33 2000</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
82.322	<p>The cor. of secs. 28, 29, 32 and 33.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 1°19'00" W., bet. secs. 28 and 29.</p> <p>Over nearly level terrain.</p>
40.940	<p>Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S29 S28 2000</p>
81.880	<p>Point for the cor. of secs. 20, 21, 28 and 29, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S20 S21 ----- S29 S28 2000</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 86°50'00" W., bet. secs. 21 and 28.</p> <p>Over nearly level terrain.</p>
40.782	<p>Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S21 1/4 ——— S28 2000</p>
81.564	<p>The cor. of secs. 20, 21, 28 and 29.</p>
	<p>N. 1°04'40" W., bet. secs. 20 and 21.</p> <p>Over nearly level terrain.</p>
40.937	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S20 S21</p> <p style="text-align: center;">2000</p>
81.874	<p>Point for the cor. of secs. 16, 17, 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S17 S16 ----- S20 S21</p> <p style="text-align: center;">2000</p>
	<hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 85°58'20" W., bet. secs. 16 and 21.</p> <p>Over nearly level terrain.</p>
40.366	<p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S16 1/4 ——— S21</p> <p style="text-align: center;">2000</p>
60.549	<p>Point for the W 1/16 sec. cor. of secs. 16 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S16 W 1/16 ——— S21</p> <p style="text-align: center;">2000</p>
73.35	<p>Gravel road, 24 lks. wide, bears S. 45° E. and N. 45° W.</p>
80.732	<p>The cor. of secs. 16, 17, 20 and 21.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 5°18'40" W., bet. secs. 16 and 17.</p> <p>Over nearly level terrain.</p>
9.75	Gravel road, 24 lks. wide, bears S. 50° E. and N. 50° W.
20.553	Point for the S 1/16 sec. cor. of secs. 16 and 17.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 1/16 S17 S16</p>
	<p style="text-align: center;">2000</p>
32.50	Corner of wire fences extending N. and irregularly W.; thence over nearly level terrain, along fence.
41.106	<p>The 1/4 cor. of secs. 16 and 17, determined at the extension of wire fences to the W. and S. and a downed wire fence to the N. This position is accepted as the best available evidence of the position of the original corner.</p>
	At the corner point
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S17 S16</p>
	<p style="text-align: center;">1999</p>
	<p>From this cor., the corner of wire fences extending S. and NW. bears SOUTH, 18 lks. dist.</p>
	<p>From this same cor., the corner of wire fences extending W. and SE., bears WEST, 23 lks. dist.</p>
	<hr style="width: 20%; margin: auto;"/> <p>N. 1°04'30" E., beginning new measurement.</p>
	Over nearly level terrain.
1.75	Remains of old dirt road, 12 lks. wide, bears E. and curving SW.
6.00	Wall Creek, 75 lks. wide, course S. 70° W.; enter cultivated field.
10.95	Canal, 16 lks. wide, course S. 75° W.
16.10	Dirt road, 20 lks. wide, bears N. 75° E. and S. 75° W.; enter nearly level terrain.
19.917	Point for the N 1/16 sec. cor. of secs. 16 and 17.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">N 1/16 S17 S16</p> <p style="text-align: center;">2000</p>
39.834	<p>Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S 8 S 9 ----- S17 S16</p> <p style="text-align: center;">2000</p>
	<p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p>
	<hr/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>N. 85°51'30" W., bet. secs. 9 and 16.</p> <p>Over rolling terrain.</p>
7.50	<p>Easterly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; across water.</p>
13.50	<p>Westerly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; over rolling land.</p>
15.00	<p>Dirt road, 18 lks. wide, bears SE. and NW.</p>
19.850	<p>Point for the E 1/16 sec. cor. of secs. 9 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 9 E 1/16 ----- S16</p> <p style="text-align: center;">2000</p>
39.700	<p>Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S 9 1/4 ----- S16</p> <p style="text-align: center;">2000</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 59.550	<p>Point for the W 1/16 sec. cor. of secs. 9 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 9 W 1/16 — S 16</p> <p>2000</p> </div>
79.400	<p>The cor. of secs. 8, 9, 16 and 17.</p> <hr/> <p>N. 2°14'00" W., bet. secs. 8 and 9.</p> <p>Over rolling terrain.</p>
10.70	Dirt road, 18 lks. wide, bears ESE. and WNW.
39.857	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T37N R19E 1/4 S 8 S 9</p> <p>2000</p> </div>
79.714	<p>Point for the cor. of secs. 4, 5, 8 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T37N R19E S 5 S 4 — S 8 S 9</p> <p>2000</p> </div> <hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 86°49'40" W., bet. secs. 4 and 9.</p> <p>Over rolling terrain.</p>
39.205	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S 4 1/4 — S 9 2000</p>
78.410	<p>Set a steel fence post alongside stainless steel post. The cor. of secs. 4, 5, 8 and 9.</p> <hr/>
39.864	<p>N. 2°30'30" E., bet. secs. 4 and 5. Over rolling terrain.</p>
	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>
40.00	<p style="text-align: center;">T37N R19E 1/4 S 5 S 4 2000</p> <p>Ravine, drains NW.</p>
80.157	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described. N. 0°18'10" W., bet. secs. 31 and 32. Over nearly level terrain.</p>
4.00	<p>Dirt road, 18 lks. wide, bears E. and W.</p>
40.856	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
49.90	<p style="text-align: center;">T37N R19E 1/4 S31 S32 2000</p> <p>Dirt road, 18 lks. wide, bears N. and S. 35° E.; thence over nearly level terrain, along road.</p>
61.284	<p>Point for the N 1/16 sec. cor. of secs. 31 and 32.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the surface of a dirt road, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S31 S32</p> <p style="text-align: center;">2000</p>
	<p>Cor. falls in dirt road, 18 lks. wide, bears N. and S.</p>
81.712	<p>Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S30 S29 ----- S31 S32</p> <p style="text-align: center;">2000</p>
	<hr/> <p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 88°36'00" W., bet. secs. 29 and 32.</p> <p>Over nearly level terrain.</p>
30.65	<p>Washoe County Route 447, paved, 36 lks. wide, bears S. 35° E. and N. 35° W.</p>
41.470	<p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S29 1/4 ——— S32</p> <p style="text-align: center;">2000</p>
82.940	<p>The cor. of secs. 29, 30, 31 and 32.</p> <hr/> <p>N. 89°14'40" W., bet. secs. 30 and 31.</p> <p>Over nearly level terrain.</p>
41.296	<p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S30 1/4 ——— S31 2000</p>
61.944	<p>Point for the W 1/16 sec. cor. of secs. 30 and 31. NOT MONUMENTED.</p>
75.75	<p>East edge of Duck Lake, bears N. and S.; enter dry bed.</p>
81.808	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 29, 30, 31 and 32. N. 0°53'20" W., bet. secs. 29 and 30. Over nearly level terrain, along dirt road.</p>
40.860	<p>Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S30 S29 2000</p>
61.290	<p>Point for the N 1/16 sec. cor. of secs. 29 and 30. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">N 1/16 S30 S29 2000</p>
66.55	<p>Washoe County Route 447, paved, 36 lks. wide, bears S. 20° E. and N. 20° W.</p>
81.720	<p>Point for the cor. of secs. 19, 20, 29 and 30, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S19 S20 <hr style="width: 50%; margin: auto;"/>S30 S29 2000</p>
	<p>From the cor. of secs. 20, 21, 28 and 29. N. 88°41'30" W., bet. secs. 20 and 29. Over gently rolling terrain.</p>
41.150	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S20 1/4 ——— S29 2000</p>
82.300	<p>The cor. of secs. 19, 20, 29 and 30.</p>
	<p>WEST, bet. secs. 19 and 30. Over nearly level terrain.</p>
0.75	<p>Dirt road, 24 lks. wide, bears N. and S.</p>
4.00	<p>Washoe County Route 447, paved, 36 lks. wide, bears S. 15° E. and N. 15° W.</p>
20.452	<p>Point for the E 1/16 sec. cor. of secs. 19 and 30. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S19 E 1/16 ——— S30 2000</p>
40.904	<p>Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S19 1/4 — S30 2000</p>
80.888	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 19, 20, 29 and 30. N. 0°28'50" W., bet. secs. 19 and 20. Over nearly level terrain.</p>
40.857	<p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S19 S20 2000</p>
81.714	<p>Cor. is located 175 lks. E. of wire fence, bears N. and S. Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S18 S17 — — S19 S20 2000</p>
	<p>Cor. is located 215 lks. E. of wire fence, bears N. and S. From this point, the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., bears S. 89°13'50" W., 80.500 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52, with a steel fence post set alongside.</p>
	<p>Cor. is located 3.40 chs. E. of wire fence, bears S. 10° E. and N. 10° W. The control line was fully retraced, and no evidence of the intervening cor. was found.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 88°47'00" W., bet. secs. 17 and 20.</p> <p>Over nearly level terrain.</p>
40.713	<p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S17 1/4 ——— S20 2000</p>
81.426	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of cor.</p> <p>The cor. of secs. 17, 18, 19 and 20.</p>
	<p>N. 3°03'50" W., bet. secs. 17 and 18.</p> <p>Over nearly level terrain.</p>
17.30	<p>Gravel road, 24 lks. wide, bears N. 85° E. and S. 85° W.</p>
20.457	<p>Point for the S 1/16 sec. cor. of secs. 17 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 1/16 S18 S17 2000</p>
40.914	<p>From this point, the intersection of wire fences extending N. and W. bears N. 40° W., 1.30 chs. dist.</p>
	<p>The 1/4 sec. cor. of secs. 17 and 18, determined at the intersection of fence remnants extending S. and E. This position is accepted as the best available evidence of the position of the original corner.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S18 S17 1999</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS											
	<p>From this cor., the southwest corner of a stone building bears N. 21°25' E., 14.00 chs. dist. (Record: N. 15° E.)</p>										
	<p style="text-align: center;">_____</p> <p>N. 0°43'50" E., beginning new measurement.</p>										
	<p>Over nearly level terrain.</p>										
1.40	<p>Wall Creek, 20 lks. wide, course S. 50° W.; enter improved land.</p>										
39.828	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance; there is no remaining evidence of the original corner.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>										
	<p style="text-align: center;"> <table border="0"> <tr><td colspan="2">T37N R19E</td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td colspan="2">_____</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td colspan="2">2000</td></tr> </table> </p>	T37N R19E		S 7	S 8	_____		S18	S17	2000	
T37N R19E											
S 7	S 8										

S18	S17										
2000											
	<p style="text-align: center;">_____</p>										
	<p>From the cor. of secs. 8, 9, 16 and 17.</p>										
	<p>N. 88°49'00" W., bet. secs. 8 and 17.</p>										
	<p>Over rolling terrain.</p>										
20.007	<p>Point for the E 1/16 sec. cor. of secs. 8 and 17.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>										
	<p style="text-align: center;"> <table border="0"> <tr><td colspan="2">S 8</td></tr> <tr><td>E 1/16</td><td>_____</td></tr> <tr><td colspan="2">S17</td></tr> <tr><td colspan="2">2000</td></tr> </table> </p>	S 8		E 1/16	_____	S17		2000			
S 8											
E 1/16	_____										
S17											
2000											
40.014	<p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original corner.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>										
	<p style="text-align: center;"> <table border="0"> <tr><td colspan="2">T37N R19E</td></tr> <tr><td colspan="2">S 8</td></tr> <tr><td>1/4</td><td>_____</td></tr> <tr><td colspan="2">S17</td></tr> <tr><td colspan="2">2000</td></tr> </table> </p>	T37N R19E		S 8		1/4	_____	S17		2000	
T37N R19E											
S 8											
1/4	_____										
S17											
2000											
66.80	<p>Dirt road, 18 lks. wide, bears SE. and NW.; enter improved land.</p>										
80.028	<p>The cor. of secs. 7, 8, 17 and 18.</p>										
	<p style="text-align: center;">_____</p>										

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>S. 89°12'30" W., bet. secs. 7 and 18. Over nearly level, improved land.</p>
16.60	Dirt road, 18 lks. wide, bears SE. and NW.
19.915	Point for the E 1/16 sec. cor. of secs. 7 and 18.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 7 E 1/16 ——— S18</p>
	2000
39.830	Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E S 7 1/4 ——— S18</p>
	2000
	Point falls in cultivated field.
79.00	Canal, 8 lks. wide, drains N. 35° E.
79.142	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 7, 8, 17 and 18.</p>
	N. 1°31'50" W., bet. secs. 7 and 8.
	Over nearly level, improved land.
7.00	Wire fence, bears irregularly E. and W.; enter rolling terrain.
19.920	Point for the S 1/16 sec. cor. of secs. 7 and 8.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 1/16 S 7 S 8</p>
	2000
39.840	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E 1/4 S 7 S 8 2000</p>
79.680	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S 6 S 5 ----- S 7 S 8 2000</p>
39.517	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>N. 88°48'10" W., bet. secs. 5 and 8.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E S 5 1/4 ----- S 8 2000</p>
79.034	<p>The cor. of secs. 5, 6, 7 and 8.</p> <hr/> <p>S. 89°50'40" W., bet. secs. 6 and 7.</p> <p>Over nearly level terrain.</p>
39.292	<p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T37N R19E S 6 1/4 — S 7</p> <p style="text-align: center;">2000</p>
58.938	<p>Cor. is located 200 lks. S. of wire fence, bears E. and W.</p> <p>Point for the W 1/16 sec. cor. of secs. 6 and 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">S 6 W 1/16 — S 7</p> <p style="text-align: center;">2000</p>
77.435	<p>Cor. is located 100 lks. S. of wire fence, bears E. and W.</p> <p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.</p>
	<hr/> <p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 2°12'30" E., bet. secs. 5 and 6.</p> <p>Over nearly level terrain.</p>
39.854	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T37N R19E 1/4 S 6 S 5</p> <p style="text-align: center;">1999</p>
80.525	<p>The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.</p>
	<hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 3, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 3 and 10.</p> <p>N. 1°35'00" E., on the N-S center line of sec. 3.</p> <p>Over rolling and broken terrain.</p>
6.65	<p>Wall Creek, 20 lks. wide, course S. 30° W.</p>

SUBDIVISION OF SECTION 3,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
12.60	Wall Creek, 20 lks. wide, course S. 60° E.
28.60	Wall Creek, 20 lks. wide, course S. 20° W.
41.045	Point for the center 1/4 sec. cor. of sec. 3, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. T37N R19E C 1/4 S 3 1999
44.60	Set a steel fence post alongside stainless steel post. Wall Creek, 20 lks. wide, course S. 60° E.
62.750	Point for the C-N 1/16 sec. cor. of sec. 3. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd. C N 1/16 S 3 C 1999
85.487	The 1/4 sec. cor. of secs. 3 and 34, on the N. bdy. of the Tp. <hr/> From the 1/4 sec. cor. of sec. 3 only, monumented with a trapstone, 18x16x10 ins., loosely set in a mound of stone, plainly mkd. 1/4 on the W. face. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd. T37N R19E 1/4 S 3 1999 Bury the original cornerstone alongside stainless steel post. N. 87°54'10" W., on the E-W center line of sec. 3. Over rolling and broken terrain.
38.25	Wall Creek, 20 lks. wide, course S. 60° E.
41.848	The center 1/4 sec. cor. of sec. 3.

SUBDIVISION OF SECTION 3,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 63.490	<p>Point for the C-W 1/16 sec. cor. of sec. 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} W \ 1/16 \\ C \ \frac{\quad}{\quad} \ C \\ S \ 3 \end{array}$ <p>1999</p> </div>
85.132	<p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of cor.</p> <p>The 1/4 sec. cor. of secs. 3 and 4.</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 3 and 10.</p> <p>N. 0°49'30" E., on the N-S center line of the SW1/4 of sec. 3.</p> <p>Over rolling and broken terrain.</p>
41.585	<p>The C-W 1/16 sec. cor. of sec. 3.</p> <hr/> <p>N. 3°58'10" E., on the N-S center line of the NW1/4 of sec. 3.</p> <p>Over rolling and broken terrain.</p>
21.349	<p>Point for the NW 1/16 sec. cor. of sec. 3, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> $NW \ 1/16 \ S \ 3$ <p>1999</p> </div>
43.659	<p>The W 1/16 sec. cor. of secs. 3 and 34, on the N. bdy. of the Tp.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 3.</p> <p>N. 88°55'10" W., on the E-W center line of the NW1/4 of sec. 3.</p> <p>Over rolling and broken terrain.</p>
7.30	<p>Wall Creek, 20 lks. wide, course S. 50° E.</p>
20.750	<p>The NW 1/16 sec. cor. of sec. 3.</p>
41.500	<p>The N 1/16 sec. cor. of secs. 3 and 4.</p> <hr/>

SUBDIVISION OF SECTION 7,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 7 and 18.</p> <p>N. 1°08'50" W., on the N-S center line of sec. 7.</p> <p>Over improved land.</p>
11.00	Leave improved land and enter nearly level terrain.
20.019	<p>Point for the C-S 1/16 sec. cor. of sec. 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} C \\ S\ 1/16 \left S\ 7 \\ C \end{array}$ <p>2000</p> </div>
23.70	Dirt road, 18 lks. wide, bears SE. and NW.
40.038	<p>Point for the center 1/4 sec. cor. of sec. 7, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} T37N\ R19E \\ C\ 1/4\ S\ 7 \\ \\ 2000 \end{array}$ </div>
60.074	<p>Point for the C-N 1/16 sec. cor. of sec. 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} C \\ N\ 1/16 \left S\ 7 \\ C \end{array}$ <p>2000</p> </div>
80.110	<p>The 1/4 sec. cor. of secs. 6 and 7.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 7 and 8.</p> <p>S. 89°30'00" W., on the E-W center line of sec. 7.</p> <p>Over nearly level terrain.</p>
19.780	<p>Point for the C-E 1/16 sec. cor. of sec. 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

SUBDIVISION OF SECTION 7,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	$\begin{array}{c} E \ 1/16 \\ C \ \frac{\quad}{\quad} \ C \\ S \ 7 \\ \\ 2000 \end{array}$
39.560	The center 1/4 sec. cor. of sec. 7.
59.322	Point for the C-W 1/16 sec. cor. of sec. 7. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} W \ 1/16 \\ C \ \frac{\quad}{\quad} \ C \\ S \ 7 \\ \\ 2000 \end{array}$
78.249	The 1/4 sec. cor. of secs. 7 and 12, on the W. bdy. of the Tp. <hr/>
	From the E 1/16 sec. cor. of secs. 7 and 18. N. 1°20'10" W., on the N-S center line of the SE1/4 of sec. 7. Over nearly level terrain.
19.969	Point for the SE 1/16 sec. cor. of sec. 7, at intersection with the E-W center line of the SE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} SE \ 1/16 \ S \ 7 \\ \\ 2000 \end{array}$
39.938	The C-E 1/16 sec. cor. of sec. 7. <hr/>
	From the S 1/16 sec. cor. of secs. 7 and 8. S. 89°21'20" W., on the E-W center line of the SE1/4 of sec. 7. Over nearly level terrain.
19.847	The SE 1/16 sec. cor. of sec. 7.
39.694	The C-S 1/16 sec. cor. of sec. 7. <hr/>
	From the C-W 1/16 sec. cor. of sec. 7. N. 0°58'50" W., on the N-S center line of the NW1/4 of sec. 7. Over nearly level terrain.
20.095	Point for the NW 1/16 sec. cor. of sec. 7, at intersection with the E-W center line of the NW1/4.

SUBDIVISION OF SECTION 7,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S 7</p> <p style="text-align: center;">2000</p>
40.190	<p>The W 1/16 sec. cor. of secs. 6 and 7.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 7.</p> <p>S. 89°40'20" W., on the E-W center line of the NW1/4 of sec. 7.</p> <p>Over nearly level terrain.</p>
19.703	<p>The NW 1/16 sec. cor. of sec. 7.</p>
38.415	<p>The N 1/16 sec. cor. of secs. 7 and 12, on the W. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 9, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 9 and 16.</p> <p>N. 2°31'40" W., on the N-S center line of sec. 9.</p> <p>Over rolling terrain.</p>
40.215	<p>Point for the center 1/4 sec. cor. of sec. 9, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E C 1/4 S 9</p> <p style="text-align: center;">2000</p>
80.430	<p>The 1/4 sec. cor. of secs. 4 and 9.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 9 and 10.</p> <p>N. 86°20'30" W., on the E-W center line of sec. 9.</p> <p>Over rolling terrain.</p>
19.725	<p>Point for the C-E 1/16 sec. cor. of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet and in a collar of stone, with brass cap mkd.</p>

SUBDIVISION OF SECTION 9,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	$\begin{array}{c} E\ 1/16 \\ C \frac{\quad}{S\ 9} C \\ 2000 \end{array}$
	Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of cor.
39.450	The center 1/4 sec. cor. of sec. 9.
78.900	The 1/4 sec. cor. of secs. 8 and 9.
<hr/>	
	From the E 1/16 sec. cor. of secs. 9 and 16.
	N. 2°40'30" W., on the N-S center line of the SE1/4 of sec. 9.
	Over rolling terrain.
4.60	Southerly shore of Lower Wall Canyon Reservoir, bears E. and W.; across water.
12.00	Westerly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; over rolling terrain.
40.395	The C-E 1/16 sec. cor. of sec. 9.
<hr/>	
<p>SUBDIVISION OF SECTION 10, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p>	
<hr/>	
	From the 1/4 sec. cor. of secs. 10 and 15.
	N. 1°01'50" W., on the N-S center line of sec. 10.
	Over rolling terrain.
19.891	Point for the C-S 1/16 sec. cor. of sec. 10.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} C \\ S\ 1/16 \mid S10 \\ C \end{array}$
	1999
39.782	Point for the center 1/4 sec. cor. of sec. 10, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	<p>T37N R19E C 1/4 S10</p>
	1999

SUBDIVISION OF SECTION 10,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 59.890	<p>Point for the C-N 1/16 sec. cor. of sec. 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} C \\ N\ 1/16 \mid S10 \\ C \end{array}$ <p>1999</p> </div>
79.998	<p>The 1/4 sec. cor. of secs. 3 and 10.</p> <hr/> <p>From the 1/4 sec. cor. of sec. 10 only, monumented with a volcanic stone, 20x11x9 ins., firmly set 8 ins. in the ground, in a mound of stone, plainly mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} T37N\ R19E \\ 1/4\ S10 \mid \end{array}$ <p>1999</p> </div> <p>Bury the original cornerstone alongside stainless steel post. N. 89°45'40" W., on the E-W center line of sec. 10.</p> <p>Over rolling terrain.</p>
41.095	The center 1/4 sec. cor. of sec. 10.
61.556	<p>Point for the C-W 1/16 sec. cor. of sec. 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> $\begin{array}{c} W\ 1/16 \\ C \text{ --- } C \\ S10 \end{array}$ <p>1999</p> </div>
70.50	Wall Creek, 4 lks. wide, course SW.
71.00	Easterly shore of Lower Wall Canyon Reservoir, bears N. and S.; across water.
78.00	Northerly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; over rolling terrain.
82.017	The 1/4 sec. cor. of secs. 9 and 10.

SUBDIVISION OF SECTION 10,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the W 1/16 sec. cor. of secs. 10 and 15.</p> <p>N. 1°55'50" W., on the N-S center line of the SW1/4 of sec. 10.</p> <p>Over rolling terrain.</p>
20.087	<p>Point for the SW 1/16 sec. cor. of sec. 10, at intersection with the E-W center line of the SW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SW 1/16 S10</p> <p style="text-align: center;">1999</p>
40.174	<p>The C-W 1/16 sec. cor. of sec. 10.</p> <hr/> <p>From the C-S 1/16 sec. cor. of sec. 10.</p> <p>S. 89°41'50" W., on the E-W center line of the SW1/4 of sec. 10.</p> <p>Over rolling terrain.</p>
20.141	<p>The SW 1/16 sec. cor. of sec. 10.</p>
35.00	<p>Easterly shore of Lower Wall Canyon Reservoir, bears NE. and SW.; across water.</p>
40.282	<p>The true point for the S 1/16 sec. cor. of secs. 9 and 10.</p> <hr/> <p>From the C-W 1/16 sec. cor. of sec. 10.</p> <p>N. 1°55'40" W., on the N-S center line of the NW1/4 of sec. 10.</p> <p>Over rolling terrain.</p>
13.00	<p>Wall Creek, 4 lks. wide, course S. 30° W.</p>
20.195	<p>Point for the NW 1/16 sec. cor. of sec. 10, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S10</p> <p style="text-align: center;">1999</p>
40.390	<p>The W 1/16 sec. cor. of secs. 3 and 10.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 10.</p> <p>N. 89°33'30" W., on the E-W center line of the NW1/4 of sec. 10.</p> <p>Over rolling terrain.</p>

SUBDIVISION OF SECTION 10,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
7.70	Wall Creek, 6 lks. wide, course S. 40° E.
20.778	The NW 1/16 sec. cor. of sec. 10.
41.556	The N 1/16 sec. cor. of secs. 9 and 10.
<hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 14, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
	From the 1/4 sec. cor. of secs. 14 and 23.
	N. 4°20'10" W., on the N-S center line of sec. 14.
	Over rolling terrain.
20.557	Point for the C-S 1/16 sec. cor. of sec. 14.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	$\begin{array}{c} C \\ S\ 1/16 \left S14 \\ C \end{array}$
	2000
39.10	Cherry Creek, 4 lks. wide, course S. 40° W.
41.114	Point for the center 1/4 sec. cor. of sec. 14, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} T37N\ R19E \\ C\ 1/4\ S14 \end{array}$
	2000
45.70	Dirt road, 18 lks. wide, bears N. 75° E. and S. 75° W.
61.631	Point for the C-N 1/16 sec. cor. of sec. 14.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} C \\ N\ 1/16 \left S14 \\ C \end{array}$
	2000
82.148	The 1/4 sec. cor. of sec. 14 only.
	<hr/> From the 1/4 sec. cor. of secs. 13 and 14. S. 89°14'10" W., on the E-W center line of sec. 14.

SUBDIVISION OF SECTION 14,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Over rolling and broken terrain.
20.410	Point for the C-E 1/16 sec. cor. of sec. 14. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. $\begin{array}{c} \text{E } 1/16 \\ \text{C} \text{ --- } \text{C} \\ \text{S14} \\ 2000 \end{array}$
	Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.
38.50	Cherry Creek, 4 lks. wide, course S. 65° W.
40.820	The center 1/4 sec. cor. of sec. 14.
57.90	Dirt road, 18 lks. wide, bears N. 75° E. and W.
61.156	Point for the C-W 1/16 sec. cor. of sec. 14. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. $\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{ --- } \text{C} \\ \text{S14} \\ 2000 \end{array}$
	Set a steel fence post alongside stainless steel post. Cor. is located 10 lks. N. of a dirt road, 18 lks. wide, bears E. and W.
81.492	The 1/4 sec. cor. of secs. 14 and 15. <hr/>
	From the C-E 1/16 sec. cor. of sec. 14. N. 4°03'40" W., on the N-S center line of the NE1/4 of sec. 14. Over rolling terrain.
14.20	Cherry Creek, 4 lks. wide, course S. 50° W.
17.45	Dirt road, 18 lks. wide, bears N. 50° E. and S. 50° W.
20.589	Point for the NE 1/16 sec. cor. of sec. 14, at intersection with the E-W center line of the NE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. $\begin{array}{c} \text{NE } 1/16 \text{ S14} \\ 2000 \end{array}$


SUBDIVISION OF SECTION 14,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 41.160	<p>The E 1/16 sec. cor. of sec. 14 only.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 13 and 14. S. 89°01'10" W., on the E-W center line of the NE1/4 of sec. 14. Over rolling terrain.</p>
15.40	Cherry Creek, 4 lks. wide, course S. 40° W.
17.40	Dirt road, 18 lks. wide, bears N. 50° E. and S. 50° W.
20.504	The NE 1/16 sec. cor. of sec. 14.
41.008	<p>The C-N 1/16 sec. cor. of sec. 14.</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 14 and 23. N. 4°03'30" W., on the N-S center line of the SE1/4 of sec. 14. Over rolling terrain.</p>
20.608	<p>Point for the SE 1/16 sec. cor. of sec. 14, at intersection with the E-W center line of the SE1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S14 2000</p> <p>Set a steel fence post alongside stainless steel post.</p>
41.216	<p>The C-E 1/16 sec. cor. of sec. 14.</p> <hr/> <p>From the S 1/16 sec. cor. of secs. 13 and 14. S. 89°23'50" W., on the E-W center line of the SE1/4 of sec. 14. Over rolling terrain.</p>
20.316	The SE 1/16 sec. cor. of sec. 14.
40.632	<p>The C-S 1/16 sec. of sec. 14.</p> <hr/> <p>S. 89°24'00" W., on the E-W center line of the SW1/4 of sec. 14. Over rolling terrain.</p>
40.556	<p>The S 1/16 sec. cor. of secs. 14 and 15.</p> <hr/> <p>From the C-W 1/16 sec. cor. of sec. 14. N. 4°30'40" W., on the N-S center line of the NW1/4 of sec. 14.</p>

SUBDIVISION OF SECTION 14,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Over rolling terrain.
20.484	Point for the NW 1/16 sec. cor. of sec. 14, at intersection with the E-W center line of the NW1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. NW 1/16 S14 2000
40.968	The W 1/16 sec. cor. of sec. 14 only. <hr/> From the C-N 1/16 sec. cor. of sec. 14. S. 89°08'10" W., on the E-W center line of the NW1/4 of sec. 14. Over rolling terrain.
20.395	The NW 1/16 sec. cor. of sec. 14.
40.790	The N 1/16 sec. cor. of secs. 14 and 15. <hr/>
	SUBDIVISION OF SECTION 15, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA
	From the 1/4 sec. cor. of secs. 15 and 22. N. 3°54'00" W., on the N-S center line of sec. 15. Over rolling terrain.
20.325	Point for the C-S 1/16 sec. cor. of sec. 15. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. C S 1/16 S15 C 2000
40.650	Set a steel fence post alongside stainless steel post. Point for the center 1/4 sec. cor. of sec. 15, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T37N R19E C 1/4 S15 2000

SUBDIVISION OF SECTION 15,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
44.15	Cherry Creek, 4 lks. wide, course S. 70° W.
45.85	Dirt road, 18 lks. wide, bears S. 60° E. and N. 60° W.
60.976	Point for the C-N 1/16 sec. cor. of sec. 15. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. <div style="text-align: center;"> $\begin{array}{c} C \\ N\ 1/16 \mid S15 \\ C \end{array}$ <p>2000</p> </div>
81.302	The 1/4 sec. cor. of secs. 10 and 15. <hr/> From the 1/4 sec. cor. of secs. 14 and 15. S. 89°27'50" W., on the E-W center line of sec. 15. Over rolling terrain.
20.113	Point for the C-E 1/16 sec. cor. of sec. 15, falls on steep bank where it is impractical to establish a permanent monument. Cor. is located 30 lks. N. of Cherry Creek, 4 lks. wide, course irregularly W. From this point, a point selected for a witness corner to the C-E 1/16 sec. cor. of sec. 15, bears N. 2°20'20" E., 0.200 chs. dist. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. <div style="text-align: center;"> $\begin{array}{c} WC \\ E\ 1/16 \\ C \text{ --- } C \\ S15 \end{array}$ <p>2000</p>  </div>
40.226	The center 1/4 sec. cor. of sec. 15.
80.452	The 1/4 sec. cor. of secs. 15 and 16. <hr/> From the E 1/16 sec. cor. of secs. 15 and 22. N. 4°17'40" W., on the N-S center line of the SE1/4 of sec. 15. Over rolling terrain.
20.388	Point for the SE 1/16 sec. cor. of sec. 15, at intersection with the E-W center line of the SE1/4.

SUBDIVISION OF SECTION 15,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S15</p> <p style="text-align: center;">2000</p>
40.776	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>The true point for the C-E 1/16 sec. cor. of sec. 15.</p> <hr/> <p>From the S 1/16 sec. cor. of secs. 14 and 15.</p> <p>S. 89°36'50" W., on the E-W center line of the SE1/4 of sec. 15.</p> <p>Over rolling terrain.</p>
20.258	The SE 1/16 sec. cor. of sec. 15.
40.516	The C-S 1/16 sec. cor. of sec. 15.
	<hr/> <p>S. 89°36'50" W., on the E-W center line of the SW1/4 of sec. 15.</p> <p>Over rolling terrain.</p>
40.516	The S 1/16 sec. cor. of secs. 15 and 16.
	<hr/> <p>From the C-N 1/16 sec. cor. of sec. 15.</p> <p>S. 89°18'30" W., on the E-W center line of the NW1/4 of sec. 15.</p> <p>Over rolling terrain.</p>
39.936	The N 1/16 sec. cor. of secs. 15 and 16.
	<hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 16, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 16 and 21.</p> <p>N. 2°38'10" W., on the N-S center line of sec. 16.</p> <p>Over rolling terrain.</p>
20.299	<p>Point for the C-S 1/16 sec. cor. of sec. 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">C S 1/16 S16 C</p> <p style="text-align: center;">2000</p>

SUBDIVISION OF SECTION 16,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 40.598	<p>Point for the center 1/4 sec. cor. of sec. 16, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E C 1/4 S16</p> <p style="text-align: center;">2000</p>
60.705	<p>Point for the C-N 1/16 sec. cor. of sec. 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">C N 1/16 S16 C</p> <p style="text-align: center;">2000</p>
62.90	Wall Creek, 6 lks. wide, course S. 75° W.
80.812	The 1/4 sec. cor. of secs. 9 and 16.
	<hr/> <p>From the 1/4 sec. cor. of secs. 15 and 16.</p> <p>N. 85°38'30" W., on the E-W center line of sec. 16.</p> <p>Over rolling terrain.</p>
40.057	The center 1/4 sec. cor. of sec. 16.
61.217	<p>Point for the C-W 1/16 sec. cor. of sec. 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">W 1/16 C ——— C S16</p> <p style="text-align: center;">2000</p>
82.377	The 1/4 sec. cor. of secs. 16 and 17.
	<hr/> <p>From the N 1/16 sec. cor. of secs. 15 and 16.</p> <p>N. 85°45'10" W., on the E-W center line of the NE1/4 of sec. 16.</p> <p>Over rolling terrain.</p>
39.879	The C-N 1/16 sec. cor. of sec. 16.

SUBDIVISION OF SECTION 16,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the W 1/16 sec. cor. of secs. 16 and 21.</p> <p>N. 3°59'00" W., on the N-S center line of the SW1/4 of sec. 16.</p> <p>Over rolling terrain.</p>
20.420	<p>Point for the SW 1/16 sec. cor. of sec. 16, at intersection with the E-W center line of the SW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SW 1/16 S16</p> <p style="text-align: center;">2000</p>
40.840	<p>The C-W 1/16 sec. cor. of sec. 16.</p> <hr/> <p>From the C-S 1/16 sec. cor. of sec. 16.</p> <p>N. 85°48'30" W., on the E-W center line of the SW1/4 of sec. 16.</p> <p>Over rolling terrain.</p>
20.672	<p>The SW 1/16 sec. cor. of sec. 16.</p>
41.344	<p>The S 1/16 sec. cor. of secs. 16 and 17.</p> <hr/> <p>From the C-W 1/16 sec. cor. of sec. 16.</p> <p>N. 0°47'20" W., on the N-S center line of the NW1/4 of sec. 16.</p> <p>Over rolling terrain.</p>
15.20	<p>Canal, 15 lks. wide, drains S. 60° W.</p>
15.75	<p>Dirt road, 18 lks. wide, bears N. 75° E. and S. 75° W.</p>
20.002	<p>Point for the NW 1/16 sec. cor. of sec. 16, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S16</p> <p style="text-align: center;">2000</p>
40.004	<p>The W 1/16 sec. cor. of secs. 9 and 16.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 16.</p> <p>N. 85°45'00" W., on the E-W center line of the NW1/4 of sec. 16.</p> <p>Over rolling terrain.</p>
20.505	<p>The NW 1/16 sec. cor. of sec. 16.</p>

SUBDIVISION OF SECTION 16,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 41.010	The N 1/16 sec. cor. of secs. 16 and 17.
	<hr/> SUBDIVISION OF SECTION 17, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/>
	From the 1/4 sec. cor. of secs. 17 and 20.
	N. 1°41'00" W., on the N-S center line of sec. 17.
	Over rolling terrain.
14.60	Gravel road, 36 lks. wide, bears E. and W.
20.437	Point for the C-S 1/16 sec. cor. of sec. 17.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} C \\ S\ 1/16\ S17 \\ C \end{array}$
	2000
40.80	Wire fence, bears E. and W.
40.874	Point for the center 1/4 sec. cor. of sec. 17, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T37N R19E C 1/4 S17
	2000
41.05	Wall Creek, 12 lks. wide, course W.
59.65	Canal, 20 lks. wide, drains N. 70° W.; enter cultivated field.
60.814	Point for the C-N 1/16 sec. cor. of sec. 17.
	NOT MONUMENTED.
65.55	Wire fence, bears S. 50° E. and N. 50° W.; enter rolling terrain.
65.65	Dirt road, 18 lks. wide, bears S. 50° E. and N. 50° W.
80.754	The 1/4 sec. cor. of secs. 8 and 17.
	<hr/> From the 1/4 sec. cor. of secs. 16 and 17. N. 88°48'40" W., on the E-W center line of sec. 17. Over rolling terrain.

SUBDIVISION OF SECTION 17,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
19.051	Point for the C-E 1/16 sec. cor. of sec. 17. NOT MONUMENTED.
38.102	The center 1/4 sec. cor. of sec. 17.
79.798	The 1/4 sec. cor. of secs. 17 and 18.
	<hr/>
	From the point for the C-E 1/16 sec. cor. of sec. 17. N. 0°18'20" W., on the N-S center line of the NE1/4 of sec. 17. Over rolling terrain.
19.922	Point for the NE 1/16 sec. cor. of sec. 17, at intersection with the E-W center line of the NE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. NE 1/16 S17 2000
21.00	Wall Creek, 20 lks. wide, course SW.
39.844	The E 1/16 sec. cor. of secs. 8 and 17.
	<hr/>
	From the N 1/16 sec. cor. of secs. 16 and 17. N. 88°48'40" W., on the E-W center line of the NE1/4 of sec. 17. Over rolling terrain.
19.529	The NE 1/16 sec. cor. of sec. 17.
32.90	Dirt road, 20 lks. wide, bears S. 50° E. and N. 50° W.
33.05	Wire fence, bears S. 50° E. and N. 50° W.
39.058	The point for the C-N 1/16 sec. cor. of sec. 17.
	<hr/>
	From the S 1/16 sec. cor. of secs. 16 and 17. N. 88°47'50" W., on the E-W center line of the SE1/4 of sec. 17. Over rolling terrain.
39.408	The C-S 1/16 sec. cor. of sec. 17.
	<hr/>
	N. 88°47'40" W., on the E-W center line of the SW1/4 of sec. 17. Over rolling terrain.
41.203	The S 1/16 sec. cor. of secs. 17 and 18.
	<hr/>

SUBDIVISION OF SECTION 25,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the 1/4 sec. cor. of secs. 25 and 36. N. 3°03'50" W., on the N-S center line of sec. 25. Over rolling terrain.
6.00	Lost Creek, 6 lks. wide, course W.
20.884	Point for the C-S 1/16 sec. cor. of sec. 25. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. <div style="text-align: center;"> $\begin{array}{c} C \\ S\ 1/16 \left S25 \\ C \end{array}$ <p>2000</p> </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
25.50	Wire fence, bears S. 73° E. and N. 73° W.
41.768	Point for the center 1/4 sec. cor. of sec. 25, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. <div style="text-align: center;"> <p>T37N R19E C 1/4 S25</p> <p>2000</p> </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
60.70	Dirt road, 18 lks. wide, bears N. 85° E. and S. 70° W.
84.001	The 1/4 sec. cor. of secs. 24 and 25. <hr/>
	From the 1/4 sec. cor. of sec. 25 only, on the E. bdy. of the Tp. N. 88°25'20" W., on the E-W center line of sec. 25. Over rolling terrain.
41.066	The center 1/4 sec. cor. of sec. 25
82.440	The 1/4 sec. cor. of secs. 25 and 26. <hr/>
	From the C-S 1/16 sec. cor. of sec. 25. N. 88°05'50" W., on the E-W center line of the SW1/4 of sec. 25. Over rolling terrain.
40.75	Dirt road, 18 lks. wide, bears S. 45° E. and N. 45° W.

SUBDIVISION OF SECTION 25,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 40.90	Lost Creek, 4 lks. wide, course irregularly NW.
41.436	The S 1/16 sec. cor. of secs. 25 and 26.
<hr/> SUBDIVISION OF SECTION 26, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/>	
	From the 1/4 sec. cor. of secs. 26 and 35.
	N. 2°38'20" W., on the N-S center line of sec. 26.
	Over nearly level terrain.
1.60	Dirt road, 18 lks. wide, bears S. 30° E. and N. 30° W.
41.043	Point for the center 1/4 sec. cor. of sec. 26, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T37N R19E C 1/4 S26 2000
	Set a steel fence post alongside stainless steel post.
52.80	Lost Creek, 4 lks. wide, course N. 50° W.
58.05	Dirt road, 18 lks. wide, bears S. 50° E. and N. 50° W.
82.082	The 1/4 sec. cor. of secs. 23 and 26.
<hr/>	
	From the 1/4 sec. cor. of secs. 25 and 26.
	N. 89°27'20" W., on the E-W center line of sec. 26.
	Over nearly level terrain.
20.442	Point for the C-E 1/16 sec. cor. of sec. 26.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the surface of a dirt road, over a plastic-encased magnet, with brass cap mkd.
	E 1/16 C ——— C S26 2000
	From this point, a United States Geological Survey bench mark bears N. 62°49'50" W., 1.991 chs. dist., monumented with a standard brass tablet, 3 1/4 ins. diam., firmly set flush with the surface of the ground, encircled in a fiberglass tube, 6 ins. diam., with top mkd. U.S.G.S. 4978 136 LRC 1972.

SUBDIVISION OF SECTION 26,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
20.55	Dirt road, 18 lks. wide, bears S. 60° E. and N. 60° W.
22.70	Dirt road, 18 lks. wide, bears N. 30° E. and S. 30° W.
28.30	Lost Creek, 4 lks. wide, course N. 50° W.
40.884	The center 1/4 sec. cor. of sec. 26.
81.769	The 1/4 sec. cor. of secs. 26 and 27.
	<hr/> <p>From the E 1/16 sec. cor. of secs. 26 and 35. N. 2°47'40" W., on the N-S center line of the SE1/4 of sec. 26. Over rolling terrain.</p>
36.10	Lost Creek, 4 lks. wide, course N. 55° W.
41.05	Dirt road, 18 lks. wide, bears S. 50° E. and N. 50° W.
41.164	The C-E 1/16 sec. cor. of sec. 26.
	<hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 30, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 30 and 31. N. 0°37'20" W., on the N-S center line of sec. 30. Over nearly level terrain.</p>
40.602	Point for the center 1/4 sec. cor. of sec. 30, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p>T37N R19E C 1/4 S30 2000</p>
60.888	Point for the C-N 1/16 sec. cor. of sec. 30. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p>C N 1/16 S30 C 2000</p>
81.174	The 1/4 sec. cor. of secs. 19 and 30.

SUBDIVISION OF SECTION 30,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 29 and 30.</p> <p>N. 89°36'10" W., on the E-W center line of sec. 30.</p> <p>Over nearly level terrain.</p>
20.550	<p>Point for the C-E 1/16 sec. cor. of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">E 1/16 C ——— C S30</p> <p style="text-align: center;">2000</p>
41.100	<p>The center 1/4 sec. cor. of sec. 30.</p>
81.337	<p>The 1/4 sec. cor. of secs. 25 and 30, on the W. bdy. of the Tp., monumented with the bottom portion of a iron post, 1 in. diam., 16 ins. long, firmly set 4 ins. below the surface of the ground, with the top portion, 20 ins. long, laying alongside, with brass cap mkd. as described in the field notes of the dependent resurvey of the E. bdy. of T. 37 N., R. 18 E., executed under Group No. 52.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R18E R19E 1/4 S25 S30</p> <p style="text-align: center;">1999</p> <p>Bury the top and bottom portions of the iron post and set a steel fence post alongside the stainless steel post.</p> <hr/> <p>From the C-E 1/16 sec. cor. of sec. 30.</p> <p>N. 0°45'10" W., on the N-S center line of the NE1/4 of sec. 30.</p> <p>Over nearly level terrain.</p>
20.358	<p>Point for the NE 1/16 sec. cor. of sec. 30, at intersection with the E-W center line of the NE1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NE 1/16 S30</p> <p style="text-align: center;">2000</p>

SUBDIVISION OF SECTION 30,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 40.716	<p>The E 1/16 sec. cor. of secs. 19 and 30.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 29 and 30. N. 89°47'50" W., on the E-W center line of the NE1/4 of sec. 30. Over nearly level terrain.</p>
20.500	The NE 1/16 sec. cor. of sec. 30.
41.000	The C-N 1/16 sec. cor. of sec. 30.
<p>SUBDIVISION OF SECTION 31, T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
	<p>From the 1/4 sec. cor. of secs. 6 and 31, on the S. bdy. of the Tp. N. 0°19'00" W., on the N-S center line of sec. 31. Over nearly level terrain.</p>
40.590	<p>Point for the center 1/4 sec. cor. of sec. 31, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T37N R19E C 1/4 S31 2000</p>
60.880	<p>Point for the C-N 1/16 sec. cor. of sec. 31.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">C N 1/16 S31 C 2000</p>
81.170	<p>The 1/4 sec. cor. of secs. 30 and 31.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 31 and 32. N. 88°52'00" W., on the E-W center line of sec. 31. Over nearly level terrain.</p>
41.297	The center 1/4 sec. cor. of sec. 31.
61.944	Point for the C-W 1/16 sec. cor. of sec. 31.

SUBDIVISION OF SECTION 31,
T. 37 N., R. 19 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;"> $\begin{array}{c} W \ 1/16 \\ C \ \frac{\quad}{\quad} \ C \\ S31 \\ 2000 \end{array}$ </p>
81.864	<p>The 1/4 sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp.</p> <hr/> <p>From the N 1/16 sec. cor. of secs. 31 and 32. N. 89°03'10" W., on the E-W center of the NE1/4 of sec. 31. Over nearly level terrain.</p>
41.297	<p>The C-N 1/16 sec. cor. of sec. 31.</p> <hr/> <p>From the C-W 1/16 sec. cor. of sec. 31. N. 0°19'20" W., on the N-S center line of the NW1/4 of sec. 31. Over nearly level terrain.</p>
20.221	<p>Point for the NW 1/16 sec. cor. of sec. 31, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;"> $\begin{array}{c} NW \ 1/16 \ S31 \\ 2000 \end{array}$ </p>
40.442	<p>The point for the W 1/16 sec. cor. of secs. 30 and 31.</p> <hr/> <p>From the C-N 1/16 sec. cor. of sec. 31. N. 89°03'30" W., on the E-W center line of the NW1/4 of sec. 31. Over nearly level terrain.</p>
20.647	<p>The NW 1/16 sec. cor. of sec. 31.</p>
40.538	<p>The N 1/16 sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp.</p> <hr/>

TOWNSHIP 37 NORTH, RANGE 19 EAST, MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS</p>	<p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The land surveyed within Township 37 North, Range 19 East, is located approximately 45 miles northwest of Gerlach, Nevada. The elevation ranges from about 4,700 to 6,100 ft. above sea level. Vegetation consists of sagebrush, Brigham tea and native grasses. There are scattered juniper and pinion on the higher elevations.</p> <p>Lower Wall Canyon Reservoir is located in the north portion of the township and Duck Lake is partially on the western portion of the township.</p> <p>Access into the area is provided by Washoe County Route 447 and numerous improved roads and trail roads throughout the area.</p>
---------------	---

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Ronald E. Williams	Cadastral Surveyor
Quitin L. Boyles	Land Surveyor (Trainee)
Clay W. Morrow	Surveying Technician
Edith Diaz	Survey Aid
Michael McCain	Survey Aid

CERTIFICATE OF SURVEY

I, Thomas E. Casinger, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 21st day of June, 1999, amended and supplemental special instructions bearing date of the 28th day of August, 2000, and amended supplemental instructions bearing date of the 31st day of August 2001, have dependently resurveyed the south boundary, portions of the east, west and north boundaries, and a portion of the subdivisional lines, and subdivided certain sections, Township 37 North, Range 19 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

AUG 28 2013

(Date)



For Thomas E. Casinger
(Cadastral Surveyor)

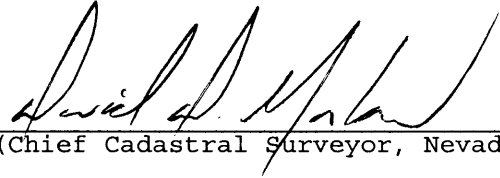
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of the south boundary, portions of the east, west and north boundaries, and a portion of the subdivisional lines, and the subdivision of certain sections, Township 37 North, Range 19 East, Mount Diablo Meridian, Nevada, executed by Thomas E. Casinger, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

AUG 28 2013

(Date)


(Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 37 N., R. 19 E., M.D.M., Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor, Nevada)~~