

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE PRESENT CALIFORNIA-NEVADA STATE LINE,
FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60,
A PORTION OF THE SOUTH BOUNDARY, THE EAST BOUNDARY,
A PORTION OF THE NORTH BOUNDARY, AND THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF CERTAIN SECTIONS,
TOWNSHIP 38 NORTH, RANGE 18 EAST,
OF THE MOUNT DIABLO MERIDIAN,
IN THE STATE OF NEVADA

EXECUTED BY

Brett K. Jefferson, Nevada Professional Land Surveyor

Under Contract No. NDC060019

Under Special Instructions dated October 24, 2008,
and approved October 24, 2008,
which provided for the surveys included under Group No. 872,
and Assignment Instructions dated October 24, 2008.

Survey commenced November 13, 2008

Survey completed November 30, 2011

TOWNSHIP 38 NORTH, RANGE 18 EAST,
MOUNT DIABLO MERIDIAN, NEVADA

MP 53
2
CA ~ NV

MP 54 6 3	18 57 5 55	16 57 4 54	15 41 3 40	33 2 32	26 1 14 25
MP 55 7 3	56 56 8 52	53 9 51	40 10 39	32 11 31	25 12 13 24
MP 56 18 4	53 17 49	51 16 48	38 15 38	30 14 30	23 13 12 23
MP 57 19 5	50 20 46	47 21 45	37 22 36	29 23 28	22 24 11 22
MP 58 30 6	47 29 42	44 28 42	35 27 34	27 26 27	21 25 10 20
MP 59 31 6	43 43 32 7	41 33	34 34	26 35	20 36 9

MP 60
CA NV

Subdivision of Section 4..... pp. 58 - 59
 Subdivision of Section 5..... pp. 59 - 60
 Subdivision of Section 8..... pp. 60 - 61
 Subdivision of Section 9..... pp. 62 - 63
 Subdivision of Section 16..... pp. 63 - 64
 Subdivision of Section 17..... pp. 64 - 65
 Subdivision of Section 20..... pp. 65 - 67
 Subdivision of Section 21..... pp. 67 - 70
 Subdivision of Section 28..... pp. 70 - 72
 Subdivision of Section 29..... pp. 72 - 74
 Subdivision of Section 32..... pp. 74 - 75

TOWNSHIP 38 NORTH, RANGE 18 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of a portion of the present California-Nevada State Line, from Witness Mile Post No. 52 1/2 to Mile Post No. 60, a portion of the south boundary, the east boundary, a portion of the north boundary, and the subdivisional lines, and the subdivision of certain sections, Township 38 North, Range 18 East, Mount Diablo Meridian, Nevada.

HISTORY OF FORMER SURVEYS

The present California-Nevada State Line was surveyed by U.S. Astronomer and Surveyor A.W. Von Schmidt in 1872 under contract dated July 20, 1872.

T. 38 N., R. 18 E., M.D.M., Nevada

The south boundary was surveyed by U.S. Deputy Surveyor G.W. Garside in 1880 under Contract No. 93. The north and east boundaries and subdivisional lines were surveyed by U.S. Deputy Surveyors C.F. Putnam and W.F. Benson in 1880 under Contract No. 96. A portion of the present California-Nevada State Line was retraced and a portion of the north boundary was dependently resurveyed by U.S. Transitman J.D. Archer in 1911 under Group No. 5 (Group No. 271, California). A portion of the present California-Nevada State Line was retraced and a portion of the south boundary was dependently resurveyed and a portion retraced by U.S. Surveyor H.W. Reppert and U.S. Transitman L.R. Mercer in 1917 under Group No. 52. A portion of the south boundary was dependently resurveyed by Cadastral Surveyor N.R. Forsyth in 1973 under Group No. 502. A portion of the north boundary was dependently resurveyed by Cadastral Surveyor R.A. Pratt in 1986 under Group No. 629.

T. 38 N., R. 17 E., M.D.M., California

The east boundary, a portion of the north boundary and a portion of the subdivisional lines were surveyed by U.S. Deputy Surveyor E. Dyer in 1866 under Contract dated July 7, 1866. This survey was executed prior to the survey of the present California-Nevada State Line executed by Von Schmidt in 1872 and a portion of this survey extends across the State Line into Nevada. The south boundary was surveyed by U.S. Deputy Surveyor W.F. Benson in 1877 under Contract dated July 20, 1877. A portion of the east boundary and a portion of the subdivisional lines were dependently resurveyed and retraced and a portion of the subdivisional lines was surveyed by U.S. Surveyor W.B. Kimmel in 1913 and 1914 under Group No. 17, California. A portion of the present California-Nevada State Line, a portion of the north boundary and a portion of the subdivisional lines were dependently resurveyed by U.S. Surveyor E. Voight in 1918-19 under Group No. 35, California. The history of other former surveys remote to the California-Nevada State Line are omitted.

Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner

TOWNSHIP 38 NORTH, RANGE 18 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey. The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 872, dated October 24, 2008.</p> <p>Measurements were made with Trimble 4800 Global Positioning System (GPS) receivers using the real-time kinematic (RTK) method and refer to the true meridian based on geodetic methods. The mean bearings of the lines and horizontal equivalents of ground distances only are entered in the field notes.</p> <p>The NAD 1983 (CORS 96) geographic position of the cor. of Tps. 37 and 38 N., Rs. 18 and 19 E., as determined from GPS static observations processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuous Operating Reference Stations (CORS) P347 ADINCTYARDCN 2007 CORS ARP, SHIN SHIN_BRGN_CN 1996 CORS ARP and GARL GARLIC CORS ARP, and carried forward by RTK observations is as follows:</p> <p>Latitude: 41°07'35.933" N. Longitude: 119°54'18.952" W.</p> <p>The 1980 mean magnetic declination is 18° E., as shown on U.S.G.S. 7 1/2 minute quadrangle map "PEGLEG CANYON, NEV-CALIF.", dated 1980.</p> <hr/> <p>DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60</p> <hr/> <p style="text-align: center;">Retracement of a Portion of the Survey Executed by U.S. Astronomer A.W. Von Schmidt in 1872 and a Portion of the Dependent Resurvey Executed by U.S. Surveyor E. Voigt in 1918-19</p> <hr/> <p>Beginning at the Witness Mile Post No. 52 1/2, monumented with an iron post, 3 ins. diam., firmly set, projecting 14 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California.</p> <p>Build a mound of earth, 3 1/2 ft. base, to top, surrounding the monument.</p> <p>S. 0°00'50" E., on a portion of the 53rd mile.</p> <p>Across dry alkali bed of Lower Lake.</p> <p>39.891 Point for Mile Post No. 53, at proportionate distance.</p> <p>POINT NOT MONUMENTED</p> <hr/> <p>S. 0°00'50" E., on the 54th mile.</p> <p>Over dry alkali bed of Lower Lake.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA
STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60

CHAINS 0.076	From this point, the 1911 closing cor. of secs. 29 and 32, on the E. bdy. of T. 39 N., R. 18 E., bears WEST, 0.117 chs. dist., monumented with a badly decayed iron post, 36 ins. long, 2 ins. diam., laying horizontal, 2 ins. below ground, with brass cap mkd. as described in the field notes of the subdivision of T. 39 N., R. 18 E., executed under Group No. 5.
77.372	Point for the closing cor. of Tps. 38 and 39 N., Rs. 18 E., hereinafter described.
79.782	Point for Mile Post No. 54, at proportionate distance.
	POINT NOT MONUMENTED
	S. 0°00'50" E., on the 55th mile.
	Over generally dry alkali bed of Lower Lake.
35.954	Point for the 1/4 sec. cor. of sec. 5, T. 38 N., R. 18 E., hereinafter described.
40.70	Leave Lower Lake, edge bears N. 65° E. and S. 65° W., enter nearly level land.
55.795	From this point, an unrecorded General Land Office Survey galvanized iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. MC S36 T39N R17E 1919, bears WEST, 0.066 chs. dist.
	From this same point, an unrecorded General Land Office Survey galvanized iron post, 1 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. MC S35 S36 T39N R17E 1919, bears WEST, 0.070 chs. dist. Corner is located 3 lks. W. of the corner of fences extending E., W., and S.
74.222	Point for the closing cor. of secs. 5 and 8, T. 38 N., R. 18 E., hereinafter described.
79.782	Mile Post No. 55, monumented with an iron post, 3 ins. diam., firmly set, projecting 2 ins. above an embedded mound of stone, 3 ft. base, 6 ins. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California. Corner is located in a fence, bears N. and S.
	S. 0°03'40" W., on the 56th mile.
	Over nearly level land, along fence.
14.235	Point for the N. 1/16 sec. cor. of sec. 8, T. 38 N., R. 18 E., hereinafter described.
18.072	From this point, the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of T. 38 N., R. 17 E., California, bears WEST, 0.027 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above an embedded mound of stone, 3 ft. base, 6 ins. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of subdivisions of

DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA
STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60

CHAINS	
	T. 38 N., R. 17 E., executed under Group No. 35, California, with a U.S. Fish & Wildlife Service Survey carsonite post NW. of cor.
33.60	Corner of fences extending N., S. and E., bears E., 2 lks. dist.
34.030	Point for the 1/4 sec. cor. of sec. 8, T. 38 N., R. 18 E., hereinafter described.
73.082	From this point, an iron pipe of unknown origin, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, bears WEST, 1.005 chs. dist.
73.15	Corner of fences extending N., S. and E., bears E., 4 lks. dist.
73.620	The closing cor. secs. 8 and 17, T. 38 N., R. 18 E., hereinafter described.
79.951	Mile Post No. 56, monumented with a mound of stone and earth, 4 ft. base, with earth filled center, and is accepted as the best available evidence of the position of the original corner.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">CAL $\frac{56M}{5}$ NEV</p> <p style="text-align: center;">2009</p>
	Corner is located 3 lks. W. of old fence, bears N. and S.
	S. 0°05'20" W., on the 57th mile.
	Over nearly level land, along fence.
17.923	From this point, the closing cor. of secs. 1 and 12, on the E. bdy. of T. 38 N., R. 17 E., California, bears EAST, 0.032 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of subdivisions of T. 38 N., R. 17 E., executed under Group No. 35, California. Corner is located 2 lks. W. of fence, bears N. and S.
33.869	Point for the 1/4 sec. cor. of sec. 17, T. 38 N., R. 18 E., hereinafter described.
64.30	From this point, the cor. of fences extending N. and E., bears E., 2 lks. dist.
74.069	The closing cor. of secs. 17 and 20, T. 38 N., R. 18 E., hereinafter described.

DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA
STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60

CHAINS 80.592	<p>Mile Post No. 57, monumented with an iron post, 3 ins. diam., firmly set 12 ins. below the surface of the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California.</p> <hr/>
	<p>S. 0°07'30" W., on the 58th mile.</p> <p>Over nearly level land.</p>
17.50	<p>From this point, the monument for the closing cor. of secs. 12 and 13, T. 38 N., R. 17 E., California, a bent iron post, 2 ins. diam., with flanged end, laying loose on the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of subdivisions of T. 38 N., R. 17 E., executed under Group No. 35, California, was found nearby, the original position indeterminable.</p>
19.70	<p>Fence, bears S. 75° E. and N. 75° W.</p>
20.189	<p>Mile Post No. 57+20.06, monumented with a small stone, 3x1 1/2x1 ins., set 14 ins. below the surface of the ground, mkd. with an "X" on top.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of earth and stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">CAL NEV 57M 20.06 CH</p> <p style="text-align: center;">2009</p> <p>Bury the small stone mkd. in the 1918-19 resurvey alongside the stainless steel post.</p> <p>Corner is located on an earth berm, bears N. and S., and in old fence, bears N. and S.</p> <hr/>
	<p>S. 0°07'30" W., beginning new measurement.</p>
0.35	<p>Surprise Valley Road, gravel and dirt surfaced, 20 lks. wide, bears S. 75° E. and N. 75° W.</p>
0.55	<p>Corner of fences extending S. and N. 75° W., bears W., 2 lks. dist.</p>
13.589	<p>The 1/4 sec. cor. of sec. 20, T. 38 N., R. 18 E., hereinafter described.</p> <hr/>
	<p>S. 0°07'30" W., beginning new measurement.</p>
3.95	<p>Nevada Highway No. 447, asphalt surfaced, 38 lks. wide, bears E. and W.</p>

DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA
STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60

CHAINS	
10.074	A rebar, 1/2 in. diam., firmly set flush with the ground, with a brass tag mkd. 2522 and a steel fence post alongside.
20.150	A rebar, 1/2 in. diam., firmly set flush with the ground, with a steel fence post alongside and located in a fence, bears N. and S.
30.225	A rebar, 1/2 in. diam., firmly set flush with the ground, with steel fence post alongside.
40.301	The closing cor. of secs. 20 and 29, T. 38 N., R. 18 E., hereinafter described.
46.869	Mile Post No. 58, monumented with an iron post, 3 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California. Corner is located 1 lk. W. of a fence, bears N. and S.
	S. 0°06'50" W., on the 59th mile.
	Over nearly level land, along fence.
17.139	The closing cor. of secs. 13 and 24, on the E. bdy. of T. 38 N., R. 17 E., California, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of subdivisions of T. 38 N., R. 17 E., executed under Group No. 35, California. Corner is located 5.3 lks. E. of fence, bears N. and S.
33.482	Point for the 1/4 sec. cor. of sec. 29, T. 38 N., R. 18 E., hereinafter described.
60.00	Enter rolling land.
73.532	The closing cor. of secs. 29 and 32, T. 38 N., R. 18 E., hereinafter described.
80.519	Mile Post No. 59, monumented with an iron post, 3 ins. diam., firmly set in a mound of stone, 5 ft. base, 2 1/2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California.
	S. 0°02'50" W., on the 60th mile.
	Over rolling, mountainous land.
13.280	Point for the N 1/16 sec. cor. of sec. 32, T. 38 N., R. 18 E., hereinafter described.
16.680	From this point, the closing cor. of secs. 23 and 26, T. 38 N., R. 17 E., California, bears EAST, 0.025 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of subdivisions of

DEPENDENT RESURVEY OF A PORTION OF THE PRESENT CALIFORNIA-NEVADA
STATE LINE FROM WITNESS MILE POST NO. 52 1/2 TO MILE POST NO. 60

CHAINS	
	<p>T. 38 N., R. 17 E., executed under Group No. 35, California, and an embedded mound of stone, 4 ft. base, 6 ins. high, NW. of cor. Corner is located 2 lks. E. of the corner of fences extending S. and W.</p>
	<p>Continue along fence.</p>
33.547	<p>Point for the 1/4 sec. cor. of sec. 32, T. 38 N., R. 18 E., hereinafter described.</p>
36.453	<p>A position determined for the N 1/16 sec. cor. of sec. 26, on the E. bdy. of T. 38 N., R. 17 E., California, by Conn Davis, California Professional Land Surveyor No. 6508, monumented with an aluminum post, 2 ins. diam., firmly set, projecting 17 ins. above the ground, with aluminum cap mkd. CLD SURVEYING S26 1/16 + LS 6508, as recorded in Lassen County, California, Book 37 of Maps, Page 98, filed as Document No. 2002-08897. Corner is located at the corner of fences extending N. and W.</p>
56.233	<p>A position determined for the 1/4 sec. cor. of sec. 26, on the E. bdy. of T. 38 N., R. 17 E., California, by Conn Davis, California Professional Land Surveyor No. 6508, monumented with an aluminum rod, 3/4 in. diam., firmly set, projecting 16 ins. above ground, with aluminum cap mkd. CLD SURVEYING E 1/4 LS 6508, as recorded in Lassen County, California, Book 37 of Maps, Page 98, filed as Document No. 2002-08897.</p>
74.081	<p>Point for the closing cor. of Tps. 37 and 38 N., R. 18 E., hereinafter described.</p>
76.018	<p>From this point, a position determined for the S 1/16 sec. cor. of sec. 26, on the E. bdy. of T. 38 N., R. 17 E., California, by Conn Davis, California Professional Land Surveyor No. 6508, monumented with an aluminum rod, 3/4 in. diam., firmly set, projecting 14 ins. above ground, with aluminum cap mkd. CLD SURVEYING 1/16 LS 6508, as recorded in Lassen County, California, Book 37 of Maps, Page 98, filed as Document No. 2002-08897, bears WEST, 0.030 chs. dist.</p>
79.340	<p>Mile Post No. 60, monumented with a wood post, 6x6 ins., firmly set, projecting 32 ins. above a mound of stone, 6 ft. base, 2 1/2 feet high, mkd. 60 M on the N. face, NEV on the E. face and CAL on the W. face, from which the original bearing object</p> <p style="padding-left: 40px;">A basalt rock, 4x3x3 ft. above ground, bears S. 72 1/2° E., 11 lks. dist., mkd. N.</p>
	<hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>
	<p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1880 and a Portion of the Resurvey Executed by U.S. Surveyor H.W. Reppert and U.S. Transitman L.R. Mercer in 1917</p> <hr/>
	<p>From the cor. of secs. 32 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above a mound of stone, 5 ft. base, 2 ft. high, with brass cap mkd. as described</p>

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS													
	<p>in the field notes of the dependent resurvey of the N. Bdy. of T. 37 N., R. 18 E., executed under Group No. 52, and a mound of stone, 4 ft. base, 3 ft. high, N. of cor. Remark the brass cap to read as follows:</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T38N</td> <td>R18E</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td> </tr> <tr> <td colspan="2">S5</td> </tr> <tr> <td colspan="2">2009</td> </tr> <tr> <td colspan="2">1917</td> </tr> </table> </div> <p>from which the 1917 bearing trees</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 46° E., 113 lks. dist., mkd. T33NR18E S33 BT on an open blaze.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears N. 23 1/2° W., 158 lks. dist., mkd. R18E S32 BT on an open, decayed blaze.</p> <p>S. 89°43'50" W., on the S. bdy. of sec. 32.</p>	T38N	R18E	S32	S33	<hr style="width: 50%; margin: 0 auto;"/>		S5		2009		1917	
T38N	R18E												
S32	S33												
<hr style="width: 50%; margin: 0 auto;"/>													
S5													
2009													
1917													
36.782	<p>The 1/4 sec. cor. of sec. 5, T. 37 N., R. 18 E., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of the N. bdy. of T. 37 N., R. 18 E., executed under Group No. 52, and a mound of stone, 4 1/2 ft. base, 1 ft. high, S. of cor.</p> <hr style="width: 50%; margin: 10px auto;"/> <p>S. 89°26'20" W., beginning new measurement.</p>												
3.923	<p>The 1/4 sec. cor. of sec. 32, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above an embedded mound of stone, 3 1/2 ft. base, 6 ins. high, with brass cap mkd. as described in the field notes of the dependent resurvey of the N. bdy. of T. 37 N., R. 18 E., executed under Group No. 52, and a mound of stone, 4 ft. base, 1 ft. high, N. of cor. Remark the brass cap to read as follows:</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T38N</td> <td>R18E</td> </tr> <tr> <td>1/4</td> <td>S32</td> </tr> <tr> <td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td> </tr> <tr> <td colspan="2">T37N R18E</td> </tr> <tr> <td colspan="2">2009</td> </tr> <tr> <td colspan="2">1917</td> </tr> </table> </div> <p>from which the remaining 1917 bearing tree</p> <p style="padding-left: 40px;">A dead juniper, 12 ins. diam., bears N. 10 3/4° E., 456 lks. dist., with an open, burnt blaze. (record, N. 9 3/4° E.)</p> <hr style="width: 50%; margin: 10px auto;"/> <p>S. 89°26'20" W., beginning new measurement.</p>	T38N	R18E	1/4	S32	<hr style="width: 50%; margin: 0 auto;"/>		T37N R18E		2009		1917	
T38N	R18E												
1/4	S32												
<hr style="width: 50%; margin: 0 auto;"/>													
T37N R18E													
2009													
1917													
31.582	<p>Intersect the California-Nevada State Line.</p> <p>Point for the closing cor. of Tps. 37 and 38 N., R. 18 E.</p>												

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.

T38N
R18E
S32
CC
S 5
T37N

2009

From this point, the 1917 closing corner of secs. 5 and 32, Tps. 37 and 38 N., R. 18 E., bears S. 89°26'20" W., 0.036 chs. dist., monumented with an iron post, 3 ins. diam., firmly set 12 ins. below the top of the mound of stone, 5 ft. base, 2 1/2 ft. high, with brass cap mkd. as described in the field notes of the retracement of a portion Nevada-California State Boundary, executed under Group No. 52. Add the marks AM to the brass cap.

From this same point, Mile Post No. 60 bears S. 0°02'50" W., 5.259 chs. dist., hereinbefore described.

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

Reestablishment of the Survey Executed by
U.S. Deputy Surveyors C.F. Putnam and W.F. Benson in 1880

From the cor. of Tps. 37 and 38 N., Rs. 18 and 19 E., monumented with an iron post, 2 1/2 ins. diam., firmly set in a mound of stone, 5 ft. base, 3 ft. high, with brass cap mkd. only with townships and ranges in the 1973 resurvey. Remark the brass cap to read as follows:

T38N
R18E R19E
S36 S31
S 1 S 6
R18E R19E
T37N

2008
1973

N. 0°35'10" W., bet. secs. 31 and 36.

Over mountainous land, covered with sagebrush; ascend over S. slope.

39.549

The 1/4 sec. cor. of secs. 31 and 36, monumented with a basalt stone, 17x10x4 ins., loosely set in a mound of stone, 3 ft. base, 1 ft. high, mkd. 1/4 on W. face.

At the corner point

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E R19E 1/4 S36 S31</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°06'50" E., beginning new measurement.</p> <p>Ascend over SW. slope.</p>
39.572	<p>The cor. of secs. 25, 30, 31 and 36, monumented with a basalt stone, 18x13x4 ins., firmly set in a mound of stone, 4 ft. base, 1 ft. high, mkd. with 5 grooves on N. face and 1 groove on S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E R19E S25 S30 ----- S36 S31</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°07'30" W., bet. secs. 25 and 30.</p> <p>Over mountainous land, covered with sagebrush.</p>
21.60	<p>Top of bluff, bears NW. and SE.</p>
29.00	<p>Ravine, drains SE.</p>
39.529	<p>The 1/4 sec. cor. of secs. 25 and 30, monumented with a basalt stone, 26x12x8 ins., loosely set in a mound of stone, 4 1/2 ft. base, 1 ft. high, mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E R19E 1/4 S25 S30 2008</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°17'00" W., beginning new measurement.</p>
21.10	<p>Top of ridge, bears NW. and SE.</p>
39.980	<p>The cor. of secs. 19, 24, 25 and 30, monumented with a basalt stone, 19x13x10 ins., firmly set in a mound of stone, 3 1/2 ft. base, 6 ins. high, mkd. with 4 grooves on N. face and 2 grooves on S. face.</p>
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E R19E S24 S19 <hr/>S25 S30 2008</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°27'10" W., bet. secs. 19 and 24.</p> <p>Over rolling land.</p>
18.50	<p>Top of bluff, bears NW. and SE.</p>
29.30	<p>Ravine, course SE.</p>
33.20	<p>Top of spur, slopes SW.</p>
37.50	<p>Flat, bears NE. and SW.</p>
39.875	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with a basalt stone, 16x13x6 ins., loosely set in an embedded mound of stone, 4 ft. base, mkd. 1/4 on W. face.</p>
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E R19E 1/4 S24 S19 2008</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°01'10" E., beginning new measurement.</p>
	<p>Over gently rolling land.</p>
0.80	<p>Wash, 100 lks. wide, drains N. 60° E.</p>
17.20	<p>Wash, drains SE.</p>
40.023	<p>The cor. of secs. 13, 18, 19 and 24, monumented with a basalt stone, 19x8x3 ins., firmly set in a mound of stone, 3 1/2 ft. base, 6 ins. high, mkd. with 3 grooves on N. face and 3 grooves on S. face.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E R19E S13 S18 <hr/>S24 S19 2008</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°07'00" W., bet. secs. 13 and 18.</p>
	<p>Over gently rolling terrain.</p>
12.90	<p>Trail road, 10 lks. wide, bears N. 30° E. and S. 30° W.</p>
40.146	<p>The 1/4 sec. cor. of secs. 13 and 18, monumented with a basalt stone, 19x8x4 ins., loosely set in a mound of stone, 4 ft. base, 1 ft. high, with illegible chisel marks on W. face.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E R19E 1/4 S13 S18 2008</p>

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS											
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>										
	<p>N. 0°11'30" W., beginning new measurement.</p>										
12.70	<p>Top of spur, slopes E. and W.</p>										
17.50	<p>Trail road, 10 lks. wide, bears S. 30° E. and N. 30° W.</p>										
23.00	<p>Barbed wire fence, bears N. 10° E. and S. 10° W., enter dry lake bed, edge bears S. 60° E. and N. 60° W.</p>										
40.589	<p>Point for the cor. of secs. 7, 12, 13 and 18, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T38N</td></tr> <tr><td>R18E</td><td>R19E</td></tr> <tr><td>S12</td><td>S 7</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S13</td><td>S18</td></tr> </table> <p>2008</p> </div> <p>Corner is located in area disturbed by livestock water tank grading.</p> <hr/>	T38N		R18E	R19E	S12	S 7	<hr/>		S13	S18
T38N											
R18E	R19E										
S12	S 7										
<hr/>											
S13	S18										
	<p>N. 0°11'30" W., bet. secs. 7 and 12.</p>										
	<p>Across dry lake bed.</p>										
10.00	<p>Leave dry lake bed, edge bears E. and W., ascend gradual S. slope.</p>										
40.589	<p>The 1/4 sec. cor. of secs. 7 and 12, monumented with a basalt stone, 19x13x8 ins., loosely set in a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T38N</td></tr> <tr><td>R18E</td><td>R19E</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td>S12</td><td>S 7</td></tr> </table> <p>2008</p> </div>	T38N		R18E	R19E	1/4		S12	S 7		
T38N											
R18E	R19E										
1/4											
S12	S 7										
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>										

DEPENDENT RESURVEY OF THE EAST BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS											
	N. 0°56'20" W., beginning new measurement.										
4.70	Top of table land.										
40.078	<p>The cor. of secs. 1, 6, 7 and 12, monumented with a basalt stone, 30x20x8 ins., firmly set in a mound of stone, 4 1/2 ft. base, 1 ft. high, mkd. with 1 groove on N. face and 5 grooves on S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T38N</td></tr> <tr><td style="text-align: center;">R18E</td><td style="text-align: center;">R19E</td></tr> <tr><td style="text-align: center;">S 1</td><td style="text-align: center;">S 6</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S12</td><td style="text-align: center;">S 7</td></tr> </table> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>	T38N		R18E	R19E	S 1	S 6	-----		S12	S 7
T38N											
R18E	R19E										
S 1	S 6										

S12	S 7										
	<p>N. 0°44'10" W., bet. secs. 1 and 6.</p> <p>Over mountainous land.</p>										
39.641	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with a basalt stone, 20x12x6 ins., loosely set in an embedded mound of stone, 4 ft. base, mkd. 1/4 on the W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T38N</td></tr> <tr><td style="text-align: center;">R18E</td><td style="text-align: center;">R19E</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td style="text-align: center;">S 1</td><td style="text-align: center;">S 6</td></tr> </table> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>	T38N		R18E	R19E	1/4		S 1	S 6		
T38N											
R18E	R19E										
1/4											
S 1	S 6										
	N. 0°41'20" W., beginning new measurement.										
15.60	Ravine, drains SE.										
39.816	<p>The cor. of Tps. 38 and 39 N., Rs. 18 and 19 E., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of the S. bdy. of T. 39 N., R. 19 E., executed under Group No. 629.</p> <hr/>										

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyors C.F. Putnam and W.F. Benson in 1880, and a Portion of the Resurvey Executed by U.S. Transitman J.D. Archer in 1911</p> <hr/> <p>From the cor. of secs. 2, 3, 34 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above a mound of stone, 4 1/2 ft. base, 1 1/2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the S. Bdy. of T. 39 N., R. 18 E., executed under Group No. 629.</p> <p>S. 89°42'40" W., on the N. bdy. of sec. 3.</p> <p>Over mountainous land.</p>
8.40	Top of ascent, slopes NE.
25.07	Foot of rim-rock, bears N. and S.
25.10	Top of rim-rock, 15 ft. above foot, bears N. and S.
38.00	Edge of bluff, bears N. and S.
39.818	<p>The 1/4 sec. cor. of sec. 3, monumented with a basalt stone, 22x16x8 ins., firmly set in a mound of stone, 4 ft. base, 1 ft. high, mkd. with a 4 visible on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T39N R18E</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">1/4 S 3 T38N R18E</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <p>Corner is located on a rocky W. facing slope, with sagebrush and bunchgrass.</p> <hr/> <p>N. 89°06'20" W., beginning new measurement.</p>
0.250	<p>The 1/4 sec. cor. of sec. 34, T. 39 N., R. 18 E., monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd. as described in the field notes of the resurvey of the S. bdy. of T. 39 N., R. 18 E., executed under Group No. 5, and a mound of stone, 3 ft. base, N. of cor. Add the mks. 2008 to the brass cap.</p> <p>Corner is located on a rocky W. facing slope, with sagebrush and bunchgrass.</p> <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>N. 89°06'20" W., beginning new measurement.</p>
5.00	Edge of bluff, bears N. and S.
26.00	Bottom of draw, course NW.
38.009	<p>The cor. of secs. 3 and 4, monumented with a basalt stone, 20x16x16 ins., firmly set in a mound of stone, 4 ft. base, 1 1/2 ft. high, mkd. with 3 grooves on E. face and 3 grooves on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R18E S34</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S 4 S 3 T38N R18E</p> <p>2009</p> </div> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 88°38'30" W., on the N. bdy. of sec. 4.</p> <p>Over mountainous land.</p>
1.938	<p>The cor. of secs. 33 and 34, T. 39 N., R. 18 E., monumented with an iron post, 3 1/2 ins. diam., firmly set, projecting 12 ins. above a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd. as described in the field notes of the resurvey of the S. bdy. of T. 39 N., R. 18 E., executed under Group No. 5, and a mound of stone, 4 ft. base, 3 ft. high, W. of cor. Add the mks. 2009 to the brass cap.</p> <p>Rebuild the mound of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <hr/> <p>S. 88°38'30" W., beginning new measurement.</p>
3.25	Top of spur, slopes N. and S.
37.399	<p>The 1/4 sec. cor. of sec. 4, monumented with a basalt stone, 10x10x5 ins., firmly set in an embedded mound of stone, 3 ft. base, 8 ins. high, dimly mkd. 1/4 on N. face, with a mound of stone, 4 ft. base, 1 1/2 ft. high, S. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<u>T39N R18E</u> 1/4 S 4 T38N R18E 2008 Deposit mkd. stone alongside the stainless steel post. <hr/> S. 89°18'20" W., beginning new measurement.
2.538	The 1/4 sec. cor. of sec. 33, T. 39 N., R. 18 E., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd. as described in the field notes of the resurvey of the S. bdy. of T. 39 N., R. 18 E., executed under Group No. 5, with a mound of stone, 4 ft. base, 3 ft. high, W. of cor., and a mound of stone, 3 ft. base, 2 ft. base, N. of cor. Add the mks. 2009 to the brass cap. <hr/> S. 89°18'20" W., beginning new measurement.
6.25	Foot of descent, bears N. and S.; thence over nearly level land.
16.30	Murphy Ranch Road, dirt surfaced, 12 lks. wide, bears N. 11° E. and S. 11° W.
17.865	Point for the W 1/16 sec. cor. of sec. 4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd. <hr/> W 1/16 S 4 2009
23.05	Fence enclosing meadow, bears N. and S.
38.268	Point for the cor. of secs. 4 and 5, determined by the method of irregular boundary adjustment based on the 1914 official record bet. the 1/4 sec. cor. of sec. 33 and the cor. of secs. 32 and 33, T. 39 N., R. 18 E.; there is no remaining evidence of the position of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd. <hr/> T39N R18E S33 <hr/> S 5 S 4 T38N R18E 2009 Corner is located in an irrigated meadow. <hr/>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 89°54'50" W., on the N. bdy. of sec. 5.</p> <p>Over level meadow land.</p>
1.793	<p>The cor. of secs. 32 and 33, T. 39 N., R. 18 E., monumented with the remains of a concrete filled iron post, 3 ins. diam., firmly set 2 ins. below the surface of the ground, with top 10 ins. broken off and laying alongside, with brass cap mkd. as described in the field notes of the resurvey of the S. bdy. of T. 39 N., R. 18 E., executed under Group No. 5.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in concrete, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T39N R18E S32 S33</p> <hr style="width: 50px; margin: 0 auto;"/> <p>S 5</p> <p>T38N R18E</p> <p>2009</p> </div> <p>Deposit remains of the iron post alongside the stainless steel post.</p>
	<p>S. 89°59'00" W., beginning new measurement.</p>
18.163	<p>Point for the E 1/16 sec. cor. of sec. 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <hr style="width: 50px; margin: 0 auto;"/> <p>E 1/16 S 5</p> <p>2009</p> </div>
19.85	<p>Fence, bears S. 40° E. and N. 40° W., leave meadow and enter low sand dunes.</p>
24.40	<p>Leave sand dunes, edge bears N. 30° E. and S. 30° W., enter alkali lake bed.</p>
38.119	<p>Point for the 1/4 sec. cor. of sec. 5, determined latitudinally on the line bet. the 1/4 sec. cor. of sec. 32 and the cor. of secs. 32 and 33, T. 39 N., R. 18 E. and longitudinally at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in concrete, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
39.951	<p style="text-align: center;">T39N R18E ----- 1/4 S 5 T38N R18E</p> <p style="text-align: center;">2009</p> <p>Corner falls on dry alkali lake bed.</p> <p>The 1/4 sec. cor. of sec. 32, monumented with the decayed remains of an iron post, 18 ins. long, 1 in. diam., firmly set 2 ins. below the surface of the ground.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, in concrete, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T39N R18E 1/4 S32 ----- T38N R18E</p> <p style="text-align: center;">2009</p> <p>Deposit remains of iron post alongside.</p> <p>Corner falls on dry alkali lake bed.</p>
31.712	<p style="text-align: center;">-----</p> <p>N. 88°01'10" W., beginning new measurement.</p> <p>Intersect the California-Nevada State Line.</p> <p>Point for the closing cor. of Tps. 38 and 39 N., Rs. 18 E.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T39N R18E S32 -----CC S 5 T38N R18E</p> <p style="text-align: center;">2009</p> <p>Corner falls on dry alkali lake bed.</p> <p>From this point, the 1911 closing cor. of Tps. 38 and 39 N., Rs. 18 E., bears N. 88°01'10" W., 0.147 chs. dist., monumented with the remains of a rusted iron ring.</p> <p>From this same point, Mile Post No. 54 bears S. 0°00'50" E., 2.410 chs. dist., hereinbefore described.</p> <p style="text-align: center;">-----</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Reestablishment of the Dependent Resurvey Executed by U.S. Deputy Surveyors C.F. Putnam and W.F. Benson in 1880</p>
	<p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion the N. Bdy. of T. 37 N., R. 18 E., executed under Group No. 502, and a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>N. 0°48'30" W., bet. secs. 35 and 36.</p> <p>Ascend S. slope, covered with sagebrush.</p>
39.619	<p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S35 S36</p> <p style="text-align: center;">2009</p>
79.238	<p>Point for the cor. of secs. 25, 26, 35 and 36, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S26 S25 ----- S35 S36</p> <p style="text-align: center;">2009</p>
	<p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 88°36'40" W., bet. secs. 25 and 36.</p> <p>Over mountainous land.</p>
27.75	<p>Trail road, 10 lks. wide, bears SE. and NW.</p>
40.573	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S25 1/4 ——— S36</p> <p style="text-align: center;">2009</p>
81.146	<p>The cor. of secs. 25, 26, 35 and 36.</p> <hr/>
	<p>N. 1°47'40" E., bet. secs. 25 and 26.</p>
	<p>Over mountainous land, ascend over broken S. slope.</p>
20.00	<p>Enter sparse juniper timber.</p>
39.635	<p>Point for the 1/4 sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S26 S25</p> <p style="text-align: center;">2009</p>
66.00	<p>Ridge, bears N. 45° E. and S. 45° W.</p>
79.270	<p>The cor. of secs. 23, 24, 25 and 26, monumented with a basalt stone, 17x8x3 ins., mkd. with 2 grooves on S. face and 1 groove on E. face, firmly set in an embedded mound of stone, 4 1/2 ft. base, 6 ins. high.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S23 S24 ——— S26 S25</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.
	N. 88°45'50" W., bet. secs. 24 and 25.
	Over mountainous land.
34.70	Trail road, 10 lks. wide, bears N. and S.
39.181	Point for the 1/4 sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the position of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T38N R18E S24 1/4 ——— S25 2008</p>
62.40	Foot of bluff, bears S. 40° E. and N. 40° W.
70.60	Top of bluff, bears S. 60° E. and N. 60° W.
78.362	The cor. of secs. 23, 24, 25 and 26.
	<hr/> <p>N. 0°16'20" E., bet. secs. 23 and 24.</p> <p>Over mountainous land.</p>
21.00	Leave sparse Juniper timber.
40.107	The 1/4 sec. cor. of secs. 23 and 24, monumented with a basalt stone, 16x10x8 ins., mkd. with 1/4 on W. face, firmly set in an embedded mound of stone, 3 ft. base, 6 ins. high.
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S23 S24 2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	N. 1°07'30" E., beginning new measurement.
40.244	The cor. of secs. 13, 14, 23 and 24, monumented with a basalt stone, 22x10x5 ins., firmly set in an embedded mound of

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS									
	<p>stone, 4 ft. base, 6 ins. high, mkd. with 3 grooves on the S. face and 1 groove on the E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T38N R18E</td> <td></td> </tr> <tr> <td>S14</td> <td>S13</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> </table> <p>2008</p> </div> <p>Deposit mkd. stone alongside the stainless steel post.</p>	T38N R18E		S14	S13	S23	S24		
T38N R18E									
S14	S13								
S23	S24								
7.05	<hr/> <p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 88°24'50" W., bet. secs. 13 and 24.</p> <p>Over gently rolling, mountainous land.</p> <p>Trail road, 10 lks. wide, bears N. and S.</p>								
38.542	<p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T38N R18E</td> <td></td> </tr> <tr> <td>S13</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S24</td> <td></td> </tr> </table> <p>2008</p> </div>	T38N R18E		S13		1/4	—	S24	
T38N R18E									
S13									
1/4	—								
S24									
54.40	<p>Top of bluff, bears SE. and NW.</p>								
77.074	<p>The cor. of secs. 13, 14, 23 and 24.</p> <hr/> <p>N. 3°11'00" W., bet. secs. 13 and 14.</p> <p>Over mountainous land.</p>								
8.62	<p>Fence, bears N. 47° E and S. 47° W.</p>								
39.305	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with a basalt stone, 15x6x4 ins., firmly set in an embedded mound of stone, 2 1/2 ft. base, 6 ins. high, mkd. 1/4 on the W. face.</p> <p>At the corner point</p>								

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S14 S13</p> <p style="text-align: center;">2008</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p>
	<p style="text-align: center;">_____</p>
	<p>N. 0°35'40" W., beginning new measurement.</p>
39.760	<p>Point for the cor. of secs. 11, 12, 13 and 14, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S11 S12 ----- S14 S13</p>
	<p style="text-align: center;">2008</p>
	<p style="text-align: center;">_____</p>
	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described.</p>
	<p>N. 89°42'40" W., bet. secs. 12 and 13.</p>
	<p>Across dry lake bed.</p>
3.15	<p>Trail road, 10 lks. wide, bears. N. and S.</p>
5.50	<p>Leave dry lake bed, edge bears S. 10° E. and N. 10° W., enter rolling land.</p>
39.701	<p>Point for the 1/4 sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S12 1/4 ——— S13</p>
	<p style="text-align: center;">2008</p>
79.402	<p>The cor. of secs. 11, 12, 13 and 14.</p> <p style="text-align: center;">_____</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 0°26'30" W., bet. secs. 11 and 12.</p> <p>Over nearly level, mountainous land.</p>
39.759	<p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S11 S12</p>
	<p style="text-align: center;">2008</p>
	<p>From this point, a spring, 40 ft. diam., bears N. 88°19' E., 21.0 chs. dist.</p>
79.518	<p>Point for the cor. of secs. 1, 2, 11 and 12, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S 2 S 1 ----- S11 S12</p>
	<p style="text-align: center;">2008</p>
	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.</p>
	<p>S. 89°27'40" W., bet. secs. 1 and 12.</p>
	<p>Over mountainous land.</p>
39.610	<p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S 1 1/4 ——— S12</p>
	<p style="text-align: center;">2008</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 68.60	Trail road, 10 lks. wide, bears N. and S.
79.210	The cor. of secs. 1, 2, 11 and 12.
	<hr/> <p>N. 1°08'30" W., bet. secs. 1 and 2.</p> <p>Over mountainous land.</p>
39.764	Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the position of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S 2 S 1 2008</p>
45.05	Trail road, 10 lks. wide, bears SE. and NW.
79.150	The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the S. bdy. of T. 39 N., R. 18 E., executed under Group No. 629, with a steel fence post alongside and a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	<hr/> <p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with a copper coated steel stake, 1/2 in. diam., firmly set 6 ins. below the asphalt surface, with top mkd. as described in the field notes of the dependent resurvey of a portion of the N. Bdy. of T. 37 N., R. 18 E., executed under Group No. 502, from which the 1973 references</p> <p style="padding-left: 40px;">An iron post, 2 1/2 ins. diam, firmly set, projecting 5 ins. above ground, bears N. 45° E., 1.00 ch. dist., with brass cap mkd. RM T38N R18E S35 66 FT 1973.</p> <p style="padding-left: 40px;">An iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, bears S. 45° W., 1.00 ch. dist., with brass cap mkd. RM T37N R18E S3 66 FT 1973.</p> <p>N. 0°36'20" W., bet. secs. 34 and 35.</p> <p>Over mountainous land.</p>
40.123	Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the position of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E 1/4 S34 S35 2009</p>
80.246	<p>Point for the cor. of secs. 26, 27, 34 and 35, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S27 S26 ----- S34 S35 2009</p>
8.00	<hr/> <p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>N. 89°46'10" W., bet. secs. 26 and 35.</p> <p>Over mountainous land.</p> <p>Summit, bears NE. and SW.</p>
40.340	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S26 1/4 — S35 2009</p>
74.70	<p>Top of spur, slopes S.</p>
80.680	<p>The cor. of secs. 26, 27, 34 and 35.</p>
40.148	<hr/> <p>N. 2°05'20" E., bet. secs. 26 and 27.</p> <p>Over mountainous land.</p> <p>Point for the 1/4 sec. cor. secs. 26 and 27, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">T38N R18E 1/4 S27 S26</p> <p style="text-align: center;">2009</p>
72.80	Top of spur, slopes NW.
78.50	Ravine, drains N. 55° W.
80.296	<p>The cor. of secs. 22, 23, 26 and 27, monumented with a basalt stone, 17x14x6 ins., firmly set in a mound of stone, 3 ft. base, 1 ft. high, mkd. with 2 grooves on S. face and 3 grooves on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S22 S23 ----- S27 S26</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 88°52'30" W., bet. secs. 23 and 26.</p> <p>Over mountainous land.</p>
35.00	Summit, bears NE. and SW.
40.374	<p>The 1/4 sec. cor. of secs. 23 and 26, monumented with a basalt stone, 10x8x4 ins., firmly set in an embedded collar of stone, 2 ft. base, flush with ground, mkd. 1/4 with the 4 backwards, on N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S23 1/4 — S26</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	N. 89°13'00" W., beginning new measurement.
29.20	Spur, slopes S. 25° W.
39.856	The cor. of secs. 22, 23, 26 and 27.
	<hr/>
	N. 0°30'20" W., bet. secs. 22 and 23.
	Over mountainous land.
8.30	Top of spur, bears E. and W.
26.90	Ravine, drains W.
29.70	Top of spur, slopes W.
32.50	Ravine, drains S. 70° W.
39.467	The 1/4 sec. cor. of secs. 22 and 23, monumented with a basalt stone, 14x12x10 ins., firmly set in a mound of stone, 3 1/2 ft. base, 1 ft. high, mkd. 1/4 on W. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T38N R18E 1/4 S22 S23</p>
	2009
	Deposit mkd. stone alongside the stainless steel post.
	<hr/>
	N. 1°08'40" W., beginning new measurement.
10.40	Ravine, drains W.
16.80	Top of spur, slopes W.
20.50	Ravine, drains WSW.
33.70	Top of spur, slopes W.
38.160	The cor. of secs. 14, 15, 22 and 23, monumented with a basalt stone, 16x10x6 ins., firmly set in an embedded mound of stone, 3 ft. base, 6 ins. high, mkd. with 3 grooves on S. face only.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T38N R18E S15 S14 <hr style="width: 50%; margin: auto;"/> S22 S23 2009
	Deposit mkd. stone alongside the stainless steel post.
	<hr/> From the cor. of secs. 13, 14, 23 and 24. S. 89°02'10" W., bet. secs. 14 and 23. Over mountainous land.
9.80	Fence, bears N. 47° E. and S. 47° W.
41.152	Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the position of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T38N R18E S14 1/4 ——— S23 2009
44.00	Summit, bears N. and S.
82.304	The cor. of secs. 14, 15, 22 and 23.
	<hr/> N. 0°03'30" W., bet. secs. 14 and 15. Over mountainous land.
12.20	Ravine, drains S. 65° W.
32.00	Top of bluff, bears S. 75° E. and N. 50° W.
40.253	The 1/4 sec. cor. of secs. 14 and 15, monumented with a basalt stone, 20x11x10 ins., firmly set in a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, mkd. 1/4 on W. face. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.
	T38N R18E 1/4 S15 S14 2008

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>								
	<p>N. 0°03'20" W., beginning new measurement.</p>								
39.998	<p>The cor. of secs. 10, 11, 14 and 15, monumented with a basalt stone, 23x12x6 ins., firmly set in a mound of stone, 4 ft. base, 1 ft. high, mkd. with 2 grooves on E. face and 4 grooves on S. face.</p>								
	<p>At the corner point</p>								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">T38N</td> <td style="padding: 0 5px;">R18E</td> </tr> <tr> <td style="padding: 0 5px;">S10</td> <td style="padding: 0 5px;">S11</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="padding: 0 5px;">S15</td> <td style="padding: 0 5px;">S14</td> </tr> </table>	T38N	R18E	S10	S11	-----		S15	S14
T38N	R18E								
S10	S11								

S15	S14								
	<p style="text-align: center;">2008</p>								
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>								
	<p>From the cor. of secs. 11, 12, 13 and 14, hereinbefore described.</p>								
	<p>N. 89°16'20" W., bet. secs. 11 and 14.</p>								
	<p>Over mountainous land.</p>								
39.844	<p>The 1/4 sec. cor. of secs. 11 and 14, monumented with a basalt stone, 13x9x4 ins., firmly set in a mound of stone, 3 1/2 ft. base, 6 ins. high, mkd. 1/4 on N. face.</p>								
	<p>At the corner point</p>								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 0 5px;">T38N</td> <td style="padding: 0 5px;">R18E</td> </tr> <tr> <td style="padding: 0 5px;">S11</td> <td style="padding: 0 5px;">-----</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="padding: 0 5px;">S14</td> </tr> </table>	T38N	R18E	S11	-----	1/4	S14		
T38N	R18E								
S11	-----								
1/4	S14								
	<p style="text-align: center;">2008</p>								
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>								
	<p>S. 89°04'50" W., beginning new measurement.</p>								
25.00	<p>Summit, bears S. 40° E. and N. 60° W.</p>								
39.927	<p>The cor. of secs. 10, 11, 14 and 15.</p> <hr/>								

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 0°50'30" W., bet. secs. 10 and 11. Over mountainous land.</p>
10.00	Ridge, bears S. 65° E. and N. 65° W.
26.10	Ravine, drains N. 60° W.
39.792	<p>The 1/4 sec. cor. of secs. 10 and 11, monumented with a basalt stone, 22x17x6 ins., firmly set in a mound of stone, 3 ft. base, 1 ft. high, mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R18E 1/4 S10 S11 2008</p> </div> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°31'00" E., beginning new measurement.</p>
16.20	Top of spur ridge, bears S. 55° E. and N. 55° W.
39.670	<p>The cor. of secs. 2, 3, 10 and 11, monumented with a lava stone, 9x8x6 ins., firmly set in an embedded mound of stone, 2 ft. base, 6 ins. high, mkd. with 2 grooves on E. face only.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R18E S 3 S 2 <hr/>S10 S11 2008</p> </div> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 1, 2, 11 and 12.</p>
39.499	<p>N. 89°54'40" W., bet. secs. 2 and 11. Over mountainous land.</p> <p>The 1/4 sec. cor. of secs. 2 and 11, monumented with a basalt stone, 13x8x3 ins., firmly set in a mound of stone, 3 ft. base, 1 ft. high, mkd. 1/4 on N. face.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 2 1/4 — S11</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>S. 89°38'00" W., beginning new measurement.</p>
33.50	Spur, slopes S.
39.861	The cor. of secs. 2, 3, 10 and 11.
	<hr/> <p>N. 0°59'10" W., bet. secs. 2 and 3.</p> <p>Over mountainous land.</p>
9.10	Top of spur, slopes W.
18.80	Ravine, drains S. 40° E.
39.905	The 1/4 sec. cor. of secs. 2 and 3, monumented with a basalt stone, 18x9x7 ins., firmly set in a mound of stone, 2 1/2 ft. base, 6 ins. high, mkd. 1/4 on W. face.
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S 3 S 2</p> <p style="text-align: center;">2008</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 2°17'40" W., beginning new measurement.</p>
2.90	Lava reef, bears S. 74° E. and N. 64° W.
23.50	Top of spur, slopes S. 65° E.
38.529	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the cor. of secs. 33 and 34, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above a mound of stone, 5 ft. base, 2 ft. high, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion the N. Bdy. of T. 37 N., R. 18 E., executed under Group No. 52. Add the mks. 2009 to the brass cap, from which the 1917 bearing trees</p> <p>A juniper, 16 ins. diam., bears N. 19° E., 48.9 lks. dist., mkd. T38NR18E S34 BT on a partly healed blaze. (record, N. 18 1/4° E., 90 lks.)</p> <p>A down juniper, 12 ins. diam., bears WEST, 67 lks. dist., mkd. T38NR18E S33 BT on an open blaze.</p> <p>N. 0°16'50" W., bet. secs. 33 and 34.</p> <p>Over mountainous land, descend over NE. slope.</p>
28.00	Bottom of descent, slopes E.
40.778	<p>Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S33 S34 2009</p>
63.80	<p>Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor. Ridge, bears N. 15° E. and S. 25° W.</p>
81.556	<p>Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S28 S27 ----- S33 S34 2009</p>
	<hr/> <p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 89°28'50" W., bet. secs. 27 and 34.</p> <p>Over mountainous land.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 31.90</p>	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, on curve, bears SE. and W.; thence along highway.</p>
<p>40.259</p>	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S27 1/4 ——— S34</p> <p style="text-align: center;">2009</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 18 ins. in ground, over a plastic encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, for a reference monument, bears S. 45°00' W., 1.500 chs. dist., with brass cap mkd. RM T38N R18E 1/4 S34 99.0 FT TO COR 2009 and an arrow pointing to the corner.</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 18 ins. in ground, over a plastic encased magnet, and in a mound of stone, 4 ft. base, to top, for a reference monument, bears N. 45°00' W., 1.500 chs. dist., with brass cap mkd. RM T38N R18E 1/4 S27 99.0 FT TO COR 2009 and an arrow pointing to the corner.</p> <p>Raise a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>Corner is located 15 lks. N. of asphalt edge of Nevada State Highway No. 447, bears E. and W.</p>
<p>44.00</p>	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, on curve, bears E. and NW.</p>
<p>49.50</p>	<p>Ravine, drains N. 25° W.</p>
<p>80.518</p>	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/> <p>N. 6°24'20" E., bet. secs. 27 and 28.</p> <p>Over mountainous land.</p>
<p>41.034</p>	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented with a basalt stone, 13x8x6 ins., firmly set in an earth mound, 3 1/2 ft. base, 4 ins. high, mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E 1/4 S28 S27</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/> <p>N. 0°13'40" W., beginning new measurement.</p>
20.153	<p>Point for the N 1/16 sec. cor. of secs. 27 and 28.</p> <p>POINT NOT MONUMENTED</p>
33.00	Ravine, drains E.
33.50	Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, on curve, bears E. and W.
34.95	Surprise Valley Road, dirt surfaced, 15 lks. wide, bears E. and W.
36.15	Borrow pit road, dirt surface, 12 lks. wide, bears NE. and SW.
40.306	<p>The cor. of secs. 21, 22, 27 and 28, monumented with a basalt stone, 10x8x4 ins., firmly set in an embedded collar of stone, 2 ft. base, 6 ins. high, mkd. with 3 grooves on E. face and 2 grooves on S. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S21 S22 ----- S28 S27</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <p>From this corner, an iron pipe, 1 in. diam., firmly set, projecting 6 ins. above ground, bears S. 48°23'00" W., 4.554 chs. dist.</p> <hr/> <p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 88°51'30" W., bet. secs. 22 and 27.</p> <p>Over nearly level land.</p>
2.70	Ravine, drains N. 55° W.
39.510	Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the position of the original corner.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T38N R18E S22 1/4 ——— S27 2009</p>
48.00	Foot of mountain, bears SE. and NW.
79.020	The cor. of secs. 21, 22, 27 and 28.
	<hr/> <p>N. 3°25'20" W., bet. secs. 21 and 22. Over nearly level land.</p>
0.50	Murphy Ranch Road, dirt surfaced, 12 lks. wide, bears NE. and SW.
39.380	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the position of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S21 S22 2009</p>
59.070	Point for the N 1/16 sec. cor. of secs. 21 and 22.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S21 S22 2009</p>
78.760	Point for the cor. of secs. 15, 16, 21 and 22, at proportionate distance; there is no remaining evidence of the position of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T38N R18E S16 S15 <hr style="width: 50%; margin: 0 auto;"/> S21 S22 2009
	<p>From this point, an unrecorded rebar, 1/2 in. diam., firmly set in a collar of small stone, 2 ft. base, 2 ins. high, with a steel fence post alongside, bears S. 29°33' E., 0.327 chs. dist. This position cannot be reconciled with proper procedures, is not harmoniously related to surrounding corners and is not utilized during the course of this survey.</p> <p>From this same point, the most westerly corner of a concrete slab, 7x7 ft., bears S. 48°46'40" E., one side bears N. 76° E.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 88°12'40" W., bet. secs. 15 and 22.</p> <p>Over mountainous land.</p>
41.309	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	T38N R18E S15 1/4 ——— S22 2009
49.00	Foot of mountain, bears N. and S.
78.80	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears N. and S.
82.618	The cor. of secs. 15, 16, 21 and 22.
	<hr/> <p>N. 2°57'40" E., bet. secs. 15 and 16.</p> <p>Over nearly level land.</p>
19.681	<p>Point for the S 1/16 sec. cor. of secs. 15 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	S 1/16 S16 S15 2009

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 23.25	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears SSE. and NNW.
39.362	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S16 S15 2009</p>
40.30	Foot of mountain, bears SE. and NW., enter mountainous land.
78.724	<p>Point for the cor. of secs. 9, 10, 15 and 16, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 9 S10 ----- S16 S15 2009</p>
	<hr/> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°18'20" W., bet. secs. 10 and 15.</p> <p>Over mountainous terrain.</p>
39.211	<p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S10 1/4 ——— S15 2009</p>
78.422	<hr/> <p>The cor. of secs. 9, 10, 15 and 16.</p> <hr/>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>N. 0°42'00" W., bet. secs. 9 and 10.</p>
	<p>Over mountainous land.</p>
39.313	<p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S 9 S10</p>
	<p style="text-align: center;">2009</p>
78.626	<p>Point for the cor. of secs. 3, 4, 9 and 10, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S 4 S 3</p>
	<p style="text-align: center;">S 9 S10</p>
	<p style="text-align: center;">2009</p>
	<hr/> <p>From the cor. of secs. 2, 3, 10 and 11.</p>
	<p>N. 89°54'50" W., bet. secs. 3 and 10.</p>
	<p>Over mountainous land.</p>
32.00	<p>Summit, bears N. and SE.</p>
39.566	<p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the position of the original corner.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S 3 1/4 — S10</p>
	<p style="text-align: center;">2009</p>
79.132	<p>The cor. of secs. 3, 4, 9 and 10.</p>
	<hr/>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 0°51'50" W., bet. secs. 3 and 4. Over mountainous land.</p>
39.314	<p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the position of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S 4 S 3 2009</p>
78.677	<p>The cor. of secs. 3 and 4, on the N. bdy. of the Tp., hereinbefore described.</p>
	<hr/> <p>From the cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described. N. 0°29'30" W., bet. secs. 32 and 33. Over mountainous land.</p>
40.212	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the position of the original corner. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S32 S33 2009</p>
60.318	<p>Point for the N 1/16 sec. cor. of secs. 32 and 33. POINT NOT MONUMENTED</p>
63.50	<p>Top of bluff, bears E. and NW.</p>
80.424	<p>The cor. of secs. 28, 29, 32 and 33, monumented with a basalt stone, 16x10x6 ins., firmly set in a mound of stone, 4 1/2 ft. base, 2 ft. high, mkd. with 1 groove on S. face and 4 grooves on E. face. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E S29 S28 <hr style="width: 50%; margin: auto;"/>S32 S33 2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
40.565	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 88°44'30" W., bet. secs. 28 and 33.</p> <p>Over mountainous land.</p> <p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.</p>
81.130	<p style="text-align: center;">T38N R18E S28 1/4 ——— S33 2009</p> <p>The cor. of secs. 28, 29, 32 and 33.</p> <hr/>
20.125	<p>N. 89°51'20" W., bet. secs. 29 and 32.</p> <p>Over rolling land.</p> <p>Point for the E 1/16 sec. cor. of secs. 29 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
40.250	<p style="text-align: center;">S29 E 1/16 ——— S32 2009</p> <p>The 1/4 sec. cor. of secs. 29 and 32, monumented with a basalt stone, 18x8x6 ins., firmly set in a mound of stone, 3 1/2 ft. base, 1 ft. high, mkd. 1/4 on N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 1/2 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E S29 1/4 ——— S32 2009</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr style="width: 30%; margin: auto;"/>
	<p>N. 89°56'50" W., beginning new measurement.</p>
21.50	<p>Brook, course N.</p>
31.250	<p>Intersect the California-Nevada State Line.</p>
	<p>The closing cor. of secs. 29 and 32, monumented with an iron post, 2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California, except year is stamped 1918, and a mound of stone, 4 1/2 ft. base, 1 ft. high, E. of cor.</p> <p>From this corner, Mile Post No. 59 bears S. 0°06'50" W., 6.987 chs. dist., hereinbefore described.</p> <hr/>
	<p>Point for the 1/4 sec. cor. of sec. 32, T. 38 N., R. 18 E., is at midpoint on the W. bdy. of sec. 32.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;"> T38N R18E 1/4 S32 2009</p>
	<p>Point is located in a fence, bears N. and S.</p> <p>From this point, Mile Post No. 59 bears N. 0°02'50" E., 33.547 chs. dist., hereinbefore described.</p> <hr/>
	<p>Point for the N 1/16 sec. cor. of sec. 32, T. 38 N., R. 18 E., is at midpoint bet. the closing cor. of secs. 29 and 32 and the 1/4 sec. cor. of sec. 32, on the W. bdy. of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;"> N 1/16 S32 2009</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From this point, Mile Post No. 59 bears N. 0°02'50" E., 13.280 chs. dist., hereinbefore described.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 0°32'20" E., bet. secs. 28 and 29.
	Over mountainous land.
19.735	Point for the S 1/16 sec. cor. of secs. 28 and 29.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	18 ins. in the ground, over a plastic-encased magnet, and in a
	mound of stone, 3 ft. base, to top, with brass cap mkd.
	S 1/16
	S29 S28
	2009
27.00	Foot of mountain, bears E. and W.
39.470	Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate
	distance; there is no remaining evidence of the position of the
	original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	24 ins. in the ground, over a plastic-encased magnet, with brass
	cap mkd.
	T38N R18E
	1/4
	S29 S28
	2009
59.205	Point for the N 1/16 sec. cor. of secs. 28 and 29.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	22 ins. in the ground, over a plastic-encased magnet, with brass
	cap mkd.
	N 1/16
	S29 S28
	2009
78.940	Point for the cor. of secs. 20, 21, 28 and 29, at proportionate
	distance; there is no remaining evidence of the position of the
	original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	23 ins. in the ground, over a plastic-encased magnet, with brass
	cap mkd.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	T38N R18E S20 S21 <hr style="width: 50%; margin: 0 auto;"/> S29 S28 2009
	From this point, an unrecorded rebar, 1/2 in. diam., firmly set flush with ground, with a rebar, 5/8 in. diam., projecting 5 ft. above the ground, set alongside, bears N. 7°02' W., 1.127 chs. dist.
	<hr/> From the cor. of secs. 21, 22, 27 and 28. S. 87°53'20" W., bet. secs. 21 and 28. Over nearly level ground.
0.35	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears NE. and S.
9.60	Dim road, dirt surfaced, 10 lks. wide, bears SE. and NW.
10.90	Dry creek, course NW.
13.65	Road, dirt surfaced, 15 lks. wide, bears SE. and NW.
21.30	Surprise Valley Road, dirt and gravel surfaced, 24 lks. wide, bears SE. and NW.
22.224	Point for the E 1/16 sec. cor. of secs. 21 and 28. POINT NOT MONUMENTED
23.00	Nevada State Highway NO. 447, asphalt surfaced, 38 lks. wide, bears SE. and NW.
44.448	The 1/4 sec. cor. of secs. 21 and 28, monumented with an embedded mound of stone, 3 1/2 ft. base, flush with ground, with earth depression in center, no wooden post found. This is accepted as the best available evidence of the position of the original corner. At the corner point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.
	T38N R18E S21 1/4 <hr style="width: 50%; margin: 0 auto;"/> S28 2009
	From this point, an unrecorded rebar, 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with a steel fence post alongside, bears S. 9°16' W., 1.295 chs. dist.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
20.207	<p>S. 86°45'10" W., beginning new measurement.</p> <p>Point for the W 1/16 sec. cor. of secs. 21 and 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>S21 W 1/16 ——— S28</p> <p>2009</p> </div>
40.414	<p>The cor. of secs. 20, 21, 28 and 29.</p> <hr/> <p>N. 88°58'20" W., bet. secs. 20 and 29.</p> <p>Over nearly level land.</p>
18.80	<p>Dry channel, course N.</p>
20.052	<p>Point for the E 1/16 sec. cor. of secs. 20 and 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>S20 E 1/16 ——— S29</p> <p>2009</p> </div>
40.104	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R18E S20 1/4 ——— S29</p> <p>2009</p> </div> <p>Point is located 38 lks. S. of fence, bears E. and W.</p> <p>From this point, a position established by John R. Weber, Nevada Professional Land Surveyor No. 2522, in 1971, bears N. 11°10' W., 0.371 chs. dist., monumented with a rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with brass tag mkd. LS 2522, recorded in Washoe County, Nevada, Record of Survey, Map 689, File No. 216127, using improper methods for restoring lost corners (local survey executed without a proper retracement of sec. 20) and is not utilized during the course of this survey.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 50.178	From this point, a rebar, 1/2 in. diam., firmly set, flush with ground, with brass tag mkd. LS 2522, bears N., 0.250 chs. dist.
72.077	Intersect the California-Nevada State Line.
	The closing cor. of secs. 20 and 29, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary executed under Group No. 35, California, except the year is stamped 1918.
	From this corner, Mile Post No. 58 bears S. 0°07'30" W., 6.568 chs. dist., hereinbefore described.
	The point for the 1/4 sec. cor. of secs. 29, T. 38 N., R. 18 E., is at midpoint on the W. bdy. of sec. 29.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="display: flex; align-items: center; justify-content: center;"> <div style="border-left: 1px solid black; padding-left: 5px; margin-right: 5px;">T38N R18E 1/4 S29</div> </div>
	2009
	Corner is located in fence, bears N. and S.
	From this point, Mile Post No. 58 bears N. 0°06'50" E., 33.482 chs. dist., hereinbefore described.
	From the cor. of secs. 20, 21, 28 and 29.
	N. 0°37'50" W., bet. secs. 20 and 21.
	Over nearly level land.
19.736	Point for the S 1/16 sec. cor. of secs. 20 and 21.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="display: flex; align-items: center; justify-content: center;"> <div style="margin-right: 5px;">S 1/16 S20</div> <div style="border-left: 1px solid black; padding-left: 5px; margin-left: 5px;">S21</div> </div>
	2009
26.75	Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears ESE. and WNW.
30.00	Surprise Valley Road, dirt surfaced, 24 lks. wide, bears ESE. and WNW.
34.00	Enter flat.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 39.472</p>	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S20 S21</p> <p style="text-align: center;">2009</p> <p>From this point, a hot springs bears N. 72° E., 8.50 chs. dist. and springs bear N. 11° E., 9.00 chs. dist. and N. 54° E., 30.20 chs. dist.</p>
<p>43.90</p>	<p>Fence, bears SE. and NW.</p>
<p>59.208</p>	<p>Point for the N 1/16 sec. cor. of secs. 20 and 21.</p> <p>POINT NOT MONUMENTED</p>
<p>67.00</p>	<p>Ditch, bears SE. and NW.</p>
<p>74.70</p>	<p>Ditch, bears E. and W.</p>
<p>78.944</p>	<p>Point for the cor. of secs. 16, 17, 20 and 21, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S17 S16 ----- S20 S21</p> <p style="text-align: center;">2009</p> <p>Point is located near a flowing swale in an irrigated field of grass and sagebrush.</p> <hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 88°56'50" W., bet. secs. 16 and 21.</p> <p>Over nearly level land.</p>
<p>41.286</p>	<p>The 1/4 sec. cor. of secs. 16 and 21, monumented with the remains of a square wooden post, 3x3x12 ins., with sharpened end.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R18E S16 1/4 ——— S21 2009</p>
	Deposit remains of wood post alongside the stainless steel post.
	From this corner, a rebar of unknown origin, 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with a rebar, 5/8 in. diam., 6 ft. long, laying loose alongside, bears N. 76°18' E., 1.629 chs. dist.
	<hr style="width: 30%; margin: auto;"/> <p style="text-align: center;">S. 85°53'20" W., beginning new measurement.</p>
16.60	Fence, bears N. and S., enter flat.
19.870	Point for the W 1/16 sec. cor. of secs. 16 and 21.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">S16 W 1/16 ——— S21 2009</p>
39.740	The cor. of secs. 16, 17, 20 and 21.
	<hr style="width: 30%; margin: auto;"/> <p style="text-align: center;">N. 84°00'40" W., bet. secs. 17 and 20.</p>
	Over nearly level land.
24.10	Creek, course NW.
39.966	The 1/4 sec. cor. of secs. 17 and 20, monumented with the remains of a square wooden post, 3x3x10 ins.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R18E S17 1/4 ——— S20 2009</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS						
	<p>Deposit remains of wooden post alongside the stainless steel post.</p>					
	<p>S. 87°46'50" W., beginning new measurement.</p>					
31.282	<p>Intersect the California-Nevada State Line.</p>					
	<p>The closing cor. of secs. 17 and 20, monumented with the remains of an iron post, 2 ins. diam., firmly set 3 ins. below the surface of the ground, with top 12 ins. broken off and laying alongside, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35.</p>					
	<p>At the corner point</p>					
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>					
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T38N</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S17</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">-----CC</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S20</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R18E</td></tr> </table>	T38N	S17	-----CC	S20	R18E
T38N						
S17						
-----CC						
S20						
R18E						
	<p style="text-align: center;">2009</p>					
	<p>Deposit remains of iron post alongside the stainless steel post.</p>					
	<p>Corner is located on a sandy berm, 3 ft. high, overgrown with sagebrush and buckbrush, bears N. and S.</p>					
	<p>From this corner, Mile Post No. 57 bears S. 0°05'20" W., 6.523 chs. dist., hereinbefore described.</p>					
	<p>The 1/4 sec. cor. of sec. 20, T. 38 N., R. 18 E., on the W. bdy. of sec. 20, determined by person(s) unknown, monumented with a rebar, 1/2 in. diam., firmly set 24 ins. below the surface of the ground. This is accepted as a careful and faithful determination of the position of the corner.</p>					
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>					
	<table style="margin-left: auto; margin-right: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T38N R18E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1/4 S20</td></tr> </table>	T38N R18E	1/4 S20			
T38N R18E						
1/4 S20						
	<p style="text-align: center;">2009</p>					
	<p>Deposit rebar alongside the stainless steel post.</p>					
	<p>Corner is located 1 lk. W. of a fence, bears N. and S.</p>					
	<p>From this corner, Mile Post No. 57+20.06 chs. bears N. 0°07'30" E., 13.589 chs. dist., hereinbefore described.</p>					

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 3°08'10" E., bet. secs. 16 and 17.</p> <p>Over nearly level land.</p>
39.528	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S17 S16 2009</p>
39.64	<p>From this point, a spring bears S. 89° W., 3.20 chs. dist. and the intersection of fences extending S. and W., bears S. 88°04'E., 22.27 chs. dist.</p> <p>Fence, bears E. and W.</p>
79.056	<p>The cor. of secs. 8, 9, 16 and 17, reestablished by person(s) unknown, monumented with a wooden post, 6x6x24 ins., firmly set, projecting 1 ft. above the ground and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 8 S 9 ----- S17 S16 2009</p> <p>Bury wooden post alongside the stainless steel post.</p> <p>From this corner, a lava rock of unknown origin, 8x5x4 ins., laying loose on ground, bears S. 87°55'00" E., 22.063 chs. dist.</p>
37.35	<p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 84°24'20" W., bet. secs. 9 and 16.</p> <p>Descend over SW slope.</p> <p>Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears SE. and NW.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 39.207	<p>The 1/4 sec. cor. of secs. 9 and 16, monumented with a lava stone, 12x10x7 ins., firmly set in an embedded mound of stone, 3 ft. base, 6 ins. high, mkd. 1/4 on N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 9 1/4 — S16</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°16'00" W., beginning new measurement.</p>
41.627	<p>The cor. of secs. 8, 9, 16 and 17.</p> <hr style="width: 80%; margin: auto;"/> <p>N. 86°38'10" W., bet. secs. 8 and 17.</p> <p>Over nearly level land.</p>
20.727	<p>Point for the E 1/16 sec. cor. of secs. 8 and 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">S 8 E 1/16 — S17</p> <p style="text-align: center;">2009</p>
22.20	<p>Fence, bears SE. and NW.</p>
41.454	<p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the position of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 8 1/4 — S17</p> <p style="text-align: center;">2009</p>
46.70	<p>Point is located 38 lks. S. of fence, bears E. and W.</p> <p>Fence, bears E. and W.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 62.65</p>	<p>Fence, bears N. and S.</p>												
<p>75.28</p>	<p>Fence, bears N. and S.</p>												
<p>75.322</p>	<p>Intersect the California-Nevada State Line.</p> <p>The closing cor. of secs. 8 and 17, monumented with the remains of an iron post, 2 ins. diam., firmly set 4 ins. below the surface of the ground, the upper portion of the iron post not recovered.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T38N</td><td></td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S 8</td><td></td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">—CC</td><td></td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">S17</td><td></td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">R18E</td><td></td></tr> </table> <p>2009</p> </div> <p>Deposit remains of iron post alongside the stainless steel post.</p> <p>From this point, Mile Post No. 56 bears S. 0°03'40" W., 6.331 chs. dist., hereinbefore described.</p> <hr/> <p>Point for the 1/4 sec. cor. of sec. 17, T. 38 N., R. 18 E., is at midpoint on the W. bdy. of sec. 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table style="border-collapse: collapse; margin: auto;"> <tr><td style="border-right: 1px solid black; padding-right: 5px;">T38N R18E</td></tr> <tr><td style="border-right: 1px solid black; padding-right: 5px;">1/4 S17</td></tr> </table> <p>2009</p> </div> <p>From this point, Mile Post No. 56 bears N. 0°05'20" E., 33.869 chs. dist., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 1°10'30" E., bet. secs. 8 and 9.</p> <p>Over nearly level land.</p>	T38N		S 8		—CC		S17		R18E		T38N R18E	1/4 S17
T38N													
S 8													
—CC													
S17													
R18E													
T38N R18E													
1/4 S17													
<p>40.025</p>	<p>The 1/4 sec. cor. of secs. 8 and 9, monumented with a basalt stone, 7x5x3 ins., firmly set in an embedded collar of stone, 2 1/2 ft. base, flush with ground, mkd. 1/4 on W. face.</p> <p>At the corner point</p>												

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E 1/4 S 8 S 9 2009</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°42'20" W., beginning new measurement.</p>
8.20	<p>Ravine, bears SE. and NW.</p>
19.601	<p>Point for the N 1/16 sec. cor. of secs. 8 and 9.</p>
	<p>POINT NOT MONUMENTED</p>
39.202	<p>The cor. of secs. 4, 5, 8 and 9, monumented with a basalt stone, 6x3x3 ins., mkd. with 5 grooves on S. face and 2 grooves on W. face, with a wooden post, 3 ins. diam., 34 ins. long, laying loose alongside.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E S 5 S 4 ----- S 8 S 9 2009</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p>
	<p>From this corner, a mound of stone, 2 1/2 ft. base, 1 ft. high, with no marks found, bears S. 88°20' E., 18.99 chs. dist.</p> <hr/>
	<p>From the cor. of secs. 3, 4, 9 and 10.</p>
	<p>S. 86°10'10" W., bet. secs. 4 and 9.</p>
	<p>Over mountainous terrain.</p>
39.669	<p>The 1/4 sec. cor. of secs. 4 and 9, monumented with a basalt stone, 12x5x3 ins., laying loose in an embedded mound of stone, 3 ft. base, 6 ins. high, mkd. 1/4 on a face.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R18E S 4 1/4 ——— S 9</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>S. 89°56'20" W., beginning new measurement.</p>
15.15	Murphy Ranch Road, dirt surfaced, 12 lks. wide, bears SE. and NW.
18.00	Enter valley.
19.875	<p>Point for the W 1/16 sec. cor. of secs. 4 and 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">S 4 W 1/16 ——— S 9</p> <p style="text-align: center;">2009</p>
39.750	<p>The cor. of secs. 4, 5, 8 and 9.</p> <hr style="width: 80%; margin: auto;"/> <p>S. 89°34'00" W., bet. secs. 5 and 8.</p> <p>Over nearly level land.</p>
39.050	<p>The 1/4 sec. cor. of secs. 5 and 8, monumented with a basalt stone, 6x2x2 ins., laying in an embedded mound of stone, 2 1/2 ft. base, flush with ground, mkd. with a 4 on a face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E S 5 1/4 ——— S 8</p> <p style="text-align: center;">2009</p> <p>Deposit mkd. stone alongside the stainless steel post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 82°40'10" W., beginning new measurement.</p>
22.254	Point for the W 1/16 sec. cor. of secs. 5 and 8.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	POINT NOT MONUMENTED							
36.664	<p>The 1919 closing cor. of secs. 5 and 8, monumented with the remains of an iron post, 2 ins. diam., firmly set flush with ground, in mound of stone, 3 ft. base, 1 ft. high, with top 12 ins. of iron post laying alongside, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the California-Nevada State Boundary, executed under Group No. 35, California. Add the marks AM to the brass cap and bury the remains of the iron post in place.</p> <p>Corner is located in fence, bears N. and S.</p>							
36.686	<p>Intersect the Nevada-California State Line.</p> <p>Point for the closing cor. of secs. 5 and 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 1/2 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td style="padding: 2px;">T38N</td></tr> <tr><td style="padding: 2px;">S 5</td></tr> <tr><td style="padding: 2px;">—CC</td></tr> <tr><td style="padding: 2px;">S 8</td></tr> <tr><td style="padding: 2px;">R18E</td></tr> </table> <p>2009</p> </div> <p>From this point, Mile Post No. 55 bears S. 0°00'50" E., 5.560 chs. dist., hereinbefore described.</p> <hr/> <p>Point for the 1/4 sec. cor. of sec. 8, T. 38 N., R. 18 E., is at midpoint on the W. bdy. of sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td style="padding: 2px;">T38N R18E</td></tr> <tr><td style="padding: 2px;">1/4 S 8</td></tr> </table> <p>2009</p> </div> <p>From this point, Mile Post No. 55 bears N. 0°03'40" E., 34.030 chs. dist., hereinbefore described.</p> <hr/> <p>Point for the N 1/16 sec. cor. of sec. 8, T. 38 N., R. 18 E., is at midpoint bet. the closing cor. of secs. 5 and 8 and the 1/4 sec. cor. of sec. 8, on the W. bdy. of sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>	T38N	S 5	—CC	S 8	R18E	T38N R18E	1/4 S 8
T38N								
S 5								
—CC								
S 8								
R18E								
T38N R18E								
1/4 S 8								

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;"> N 1/16 S 8</p>
	<p style="text-align: center;">2009</p> <p>From this point, Mile Post No. 55 bears N. 0°03'40" E., 14.235 chs. dist., hereinbefore described.</p> <hr/>
	<p>Point for the 1/4 sec. cor. of sec. 5, T. 38 N., R. 18 E., is at proportionate distance on the W. bdy. of sec. 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;"> T38N R18E 1/4 S 5</p>
	<p style="text-align: center;">2009</p> <p>From this point, Mile Post No. 54 bears N. 0°00'50" W., 35.954 chs. dist., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>N. 0°09'20" W., bet. secs. 4 and 5.</p>
	<p>Over nearly level land.</p>
32.85	<p>Fence, bears SE. and NW.</p>
40.040	<p>The 1/4 sec. cor. of secs. 4 and 5, monumented with a basalt stone, 10x8x4 ins., firmly set, mkd. 1/4 on W. face.</p>
	<p>At the corner point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E 1/4 S 5 S 4</p>
	<p style="text-align: center;">2009</p>
	<p>Deposit mkd. stone alongside the stainless steel post.</p> <p>From this corner, a mound of stones, partially embedded, with a wooden post, 5 ft. long, 6 ins. diam., laying alongside and a steel fence post set alongside mound, bears N. 89°53' E., 17.89 chs. dist.</p> <hr/>
	<p>N. 2°43'00" W., beginning new measurement.</p>

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 19.993	<p>Point for the N 1/16 sec. cor. of secs. 4 and 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 5 S 4</p> <p style="text-align: center;">2009</p> <p>From this point, a flowing spring bears N. 72° E., 21.50 chs. dist.</p> <p>From this same point, Old Murphy Ranch building bears N. 55° E., 15.10 chs. dist.</p>
21.30	Fence, bears E. and W.; enter meadow.
39.937	The cor. of secs. 4 and 5, on the N. bdy. of the Tp., hereinbefore described.
<hr/> SUBDIVISION OF SECTION 4, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/>	
40.982	<p>From the 1/4 sec. cor. of secs. 4 and 9.</p> <p>N. 0°40'10" W., on the N-S center line of sec. 4.</p> <p>Point for the center 1/4 sec. cor. of sec. 4, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E C 1/4 S 4</p> <p style="text-align: center;">2009</p>
80.390	The 1/4 sec. cor. of sec. 4, on the N. bdy. of the Tp.
39.475	<p>From the 1/4 sec. cor. of secs. 3 and 4.</p> <p>S. 88°34'30" W., on the E-W center line of sec. 4.</p>
59.168	<p>The center 1/4 sec. cor. of sec. 4.</p> <p>Point for the center W 1/16 sec. cor. of sec. 4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p>

SUBDIVISION OF SECTION 4,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	W 1/16 C———C S 4 2009
62.65	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears N. and S.
78.861	The 1/4 sec. cor. of secs. 4 and 5.
	<hr/> From the center W 1/16 sec. cor. of sec. 4. N. 1°42'00" W., on the N-S center line of the NW1/4 of sec. 4.
22.75	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears NE. and SW.
31.05	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears NNW. and SSE.
37.35	Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears NNE. and SSW.
39.666	The W 1/16 sec. cor. of sec. 4, on the N. bdy. of the Tp.
	<hr/> SUBDIVISION OF SECTION 5, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA
	<hr/> From the 1/4 sec. cor. of secs. 5 and 8. N. 2°03'00" W., on the N-S center line of sec. 5.
41.765	Point for the center 1/4 sec. cor. of sec. 5, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T38N R18E C 1/4 S 5 2009
61.005	Point for the center N 1/16 sec. cor. of sec. 5. POINT NOT MONUMENTED
80.269	The 1/4 sec. cor. of sec. 5, on the N. bdy. of the Tp.
	<hr/> From the 1/4 sec. cor. of secs. 4 and 5. N. 88°00'40" W., on the E-W center line of sec. 5.
20.228	Point for the center E 1/16 sec. cor. of sec. 5. POINT NOT MONUMENTED

SUBDIVISION OF SECTION 5,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.456	The center 1/4 sec. cor. of sec. 5.
75.373	The 1/4 sec. cor. of sec. 5, on the W. bdy. of the Tp.
	<hr/>
	From the point for the center E 1/16 sec. cor. of sec. 5.
	N. 2°23'20" W., on the N-S center line of the NE1/4 of sec. 5.
19.616	Point for the NE 1/16 sec. cor. of sec. 5, at intersection with the E-W center line of the NE1/4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	NE 1/16 S 5 2009
37.00	Fence, bears SE. and NW.
39.221	The E 1/16 sec. cor. of sec. 5, on the N. bdy. of the Tp.
	<hr/>
	From the N 1/16 sec. cor. of secs. 4 and 5.
	N. 89°03'30" W., on the E-W center line of the NE1/4 of sec. 5.
6.70	Fence, bears, SSE. and NNW.
20.088	The NE 1/16 sec. cor. of sec. 5.
40.176	The point for the center N 1/16 sec. cor. of sec. 5.
	<hr/>
	SUBDIVISION OF SECTION 8, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA
	<hr/>
	From the 1/4 sec. cor. of secs. 8 and 17.
	N. 1°59'30" E., on the N-S center line of sec. 8.
0.38	Fence, bears E. and W.
29.50	Fence, bears SE. and NW.
39.756	Point for the center 1/4 sec. cor. of sec. 8, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T38N R18E C 1/4 S 8 2009
58.144	Point for the center N 1/16 sec. cor. of sec. 8.

SUBDIVISION OF SECTION 8,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	POINT NOT MONUMENTED
76.532	The 1/4 sec. cor. of secs. 5 and 8.
	<hr/> From the 1/4 sec. cor. of secs. 8 and 9. N. 86°59'30" W., on the E-W center line of sec. 8.
40.872	The center 1/4 sec. cor. of sec. 8.
62.322	Point for the center W 1/16 sec. cor. of sec. 8.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} \text{W } 1/16 \\ \text{C} \text{-----} \text{C} \\ \text{S } 8 \end{array}$
	2009
76.05	Fence, bears N. and S.
76.066	The 1/4 sec. cor. of secs. 8, on the W. bdy. of the Tp.
	<hr/> From the center W 1/16 sec. cor. of sec. 8. N. 0°55'50" E., on the N-S center line of the NW1/4 of sec. 8.
19.240	Point for the NW 1/16 sec. cor. of sec. 8, at intersection with the E-W center line of the NW1/4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	NW 1/16 S 8
	2008
38.475	The point for the W 1/16 sec. cor. of secs. 5 and 8.
	<hr/> From the point for the center N 1/16 sec. cor. of sec. 8. N. 84°47'10" W., on the E-W center line of the NW1/4 of sec. 8
21.837	The NW 1/16 sec. cor. of sec. 8.
35.911	The N 1/16 sec. cor. of sec. 8, on the W. bdy. of the Tp.
	<hr/>

SUBDIVISION OF SECTION 9,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 9 and 16. N. 1°05'50" W., on the N-S center line of sec. 9.</p>
41.861	<p>Point for the center 1/4 sec. cor. of sec. 9, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R18E C 1/4 S 9 2009</p>
44.37	<p>From this point, a spring bears N. 56° W., 13.50 chs. dist. Murphy Ranch Road, dirt surfaced, 15 lks. wide, bears SE. and NW.</p>
60.833	<p>Point for the center N 1/16 sec. cor. of sec. 9. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">C N 1/16 S 9 C 2009</p>
79.805	<p>The 1/4 sec. cor. of secs. 4 and 9.</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 9 and 10. S. 88°08'10" W., on the E-W center line of sec. 9.</p>
38.25	<p>Murphy Ranch Road, dirt surface, 15 lks. wide, bears SSE. and NNW.</p>
39.358	<p>The center 1/4 sec. cor. of sec. 9.</p>
59.368	<p>Point for the center W 1/16 sec. cor. of sec. 9. POINT NOT MONUMENTED</p>
79.378	<p>The 1/4 sec. cor. of secs. 8 and 9.</p> <hr/>
	<p>From the point for the center W 1/16 sec. cor. of sec. 9. N. 0°54'00" W., on the N-S center line of the NW1/4 of sec. 9.</p>
19.287	<p>Point for the NW 1/16 sec. cor. of sec. 9, at intersection with the E-W center line of the NW1/4.</p>

SUBDIVISION OF SECTION 9,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S 9 2009</p>
38.573	<p>The W 1/16 sec. cor. of sec. 4 and 9.</p> <hr/>
	<p>From the center N 1/16 sec. cor. of sec. 9. S. 89°02'00" W., on the E-W center line of the NW1/4 of sec. 9.</p>
19.940	<p>The NW 1/16 sec. cor. of sec. 9.</p>
39.880	<p>The point for the N 1/16 sec. cor. of secs. 8 and 9.</p> <hr/>
	<p style="text-align: center;">SUBDIVISION OF SECTION 16, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 16 and 21. N. 4°46'50" E., on the N-S center line of sec. 16.</p>
19.246	<p>Point for the center S 1/16 sec. cor. of sec. 16.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">C S 1/16 S16 C 2009</p>
35.80	<p>Fence, bears E. and W.</p>
38.492	<p>Point for the center 1/4 sec. cor. of sec. 16, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E C 1/4 S16 2009</p>
75.819	<p>From this point, a flowing springhead, 10 ft. diam., bears S. 77°30' W., 2.20 chs. dist., drains N. 45° W.</p> <p>The 1/4 sec. cor. of secs. 9 and 16.</p> <hr/>

SUBDIVISION OF SECTION 16,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the 1/4 sec. cor. of secs. 15 and 16.
	S. 87°33'20" W., on the E-W center line of sec. 16.
6.35	Murphy Ranch Road, dirt surface, 15 lks. wide, bears SE. and NW.
40.137	The center 1/4 sec. cor. of sec. 16.
60.495	Point for the center W 1/16 sec. cor. of sec. 16.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="text-align: center;"> W 1/16 C ——— C S16 2009 </div>
80.60	Fence, bears ESE. and WNW.
80.853	The 1/4 sec. cor. of secs. 16 and 17.
	<hr/>
	From the S 1/16 sec. cor. of secs. 15 and 16.
	S. 88°15'50" W., on the E-W center line of the SE1/4 of sec. 16.
40.708	The center S 1/16 sec. cor. of sec. 16.
	<hr/>
	From the W 1/16 sec. cor. of secs. 16 and 21.
	N. 3°56'50" E., on the N-S center line of the SW1/4 of sec. 16.
39.006	The center W 1/16 sec. cor. of sec. 16.
	<hr/>
	SUBDIVISION OF SECTION 17, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA
	<hr/>
	From the 1/4 sec. cor. of secs. 17 and 20.
	N. 1°59'20" E., on the N-S center line of sec. 17.
37.372	Point for the center 1/4 sec. cor. of sec. 17, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<div style="text-align: center;"> T38N R18E C 1/4 S17 2009 </div>

SUBDIVISION OF SECTION 17,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 77.246	The 1/4 sec. cor. of secs. 8 and 17.
	<hr/> From the 1/4 sec. cor. of secs. 16 and 17. N. 87°06'40" W., on the E-W center line of sec. 17.
3.40	Fence, bears NE. and SW.
18.90	Fence, bears N. and S.
20.330	Point for the center E 1/16 sec. cor. of sec. 17. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	E 1/16 C———C S17 2009
40.660	The center 1/4 sec. cor. of sec. 17.
73.191	The 1/4 sec. cor. of sec. 17, on the W. bdy. of the Tp.
	<hr/> From the center E 1/16 sec. cor. of sec. 17. N. 2°33'30" E., on the N-S center line of the NE1/4 of sec. 17.
37.20	Fence, bears SE. and NW.
39.699	The E 1/16 sec. cor. of secs. 8 and 17.
	SUBDIVISION OF SECTION 20, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA
	<hr/> A portion of the south one-half of sec. 20 was surveyed by John R. Weber, Nevada Registered Land Surveyor No. 2522, in 1971, as recorded in recorded in Washoe County, Nevada, Record of Survey, Map 689, File No. 216127. The exterior monuments as shown on a portion of line between secs. 20 and 29, and interior monuments were determined without a proper retracement and subdivision of sec. 20 to the extent required to define the boundaries of federal lands in the SE1/4 of the section.
	<hr/> From the 1/4 sec. cor. of secs. 20 and 29. N. 0°22'10" W., on the N-S center line of sec. 20.
10.478	From this point, rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with brass tag mkd. LS 2522, bears EAST, 0.018 chs. dist.
19.969	Point for the center S 1/16 sec. cor. of sec. 20.

SUBDIVISION OF SECTION 20,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	POINT NOT MONUMENTED
	From this point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above the ground, with brass tag mkd. LS 2522, bears N. 9°46' E., 0.638 chs. dist.
30.712	From this point, a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with brass tag mkd. LS 2522, bears EAST, 0.200 chs. dist.
35.80	Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears ESE. and WNW.
39.938	Point for the center 1/4 sec. cor. of sec. 20, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R18E C 1/4 S20</p> <p style="text-align: center;">2009</p>
	From this point, a rebar, 1/2 in. diam., firmly set, flush with ground, with a steel fence post alongside and brass tag mkd. LS 2522, bears N. 17°45' E., 0.927 chs. dist.
46.75	Surprise Valley Road, dirt and gravel surfaced, 24 lks. wide, bears ESE. and WNW.
50.85	Fence, bears E. and W.
82.390	The 1/4 sec. cor. of secs. 17 and 20.
	<hr/>
	From the 1/4 sec. cor. of secs. 20 and 21.
	N. 88°17'50" W., on the E-W center line of sec. 20.
10.30	Trail road, dirt surfaced, 18 lks. wide, bears NE. and SW.
19.966	Point for the center E 1/16 sec. cor. of sec. 20.
	POINT NOT MONUMENTED
	From this point, a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above the ground, with a steel fence post alongside and a brass tag mkd. LS 2522, bears N. 12°31' E., 1.475 chs. dist.
25.40	Surprise Valley Road, dirt and graveled surfaced, 24 lks. wide, bears SE. and NW.
29.647	From this point, a rebar, 1/2 in. diam., firmly set flush the ground, with brass tag mkd. LS 2522, bears NORTH, 1.169 chs. dist.
39.932	The center 1/4 sec. cor. of sec. 20.

SUBDIVISION OF SECTION 20,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 71.565	<p>The 1/4 sec. cor. of sec. 20, on the W. bdy. of the Tp.</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 20 and 29.</p> <p>N. 0°30'00" W., on the N-S center line of the SE1/4 of sec. 20.</p>
10.728	<p>From this point, a rebar, 1/2 in. diam., firmly set, projecting 6 ins. above the ground, with a steel fence post alongside and a brass tag mkd. LS 2522, bears WEST, 0.005 chs. dist.</p>
19.853	<p>Point for the SE 1/16 sec. cor. of sec. 20, at intersection with the E-W center line of the SE1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S20 2009</p>
31.25	<p>From this point, a rebar, 1/2 in. diam., firmly set flush with the ground, with a steel fence post alongside, bears N. 5°34' E., 1.020 chs. dist.</p> <p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears ESE. and WNW.</p>
36.85	<p>Surprise Valley Road, dirt and graveled surfaced, 24 lks. wide, bears SE. and NW.</p>
39.705	<p>The point for the center E 1/16 sec. cor. of sec. 20.</p> <hr/> <p>From the S 1/16 sec. cor. of secs. 20 and 21.</p> <p>N. 88°38'10" W., on the E-W center line of the SE1/4 of sec. 20.</p>
20.009	<p>The SE 1/16 sec. cor. of sec. 20.</p>
29.911	<p>From this point, a rebar, 1/2 in. diam., firmly set, projecting 1 in. above the ground, with brass tag mkd. LS 2522, bears NORTH, 0.826 chs. dist.</p>
40.018	<p>The point for the center S 1/16 sec. cor. of sec. 20.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 21, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 21 and 28.</p> <p>N. 1°08'00" W., on the N-S center line of sec. 21.</p>
11.05	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears SE. and NW.</p>
14.90	<p>Trail road, dirt surfaced, 18 lks. wide, bears SE. and NW.</p>

SUBDIVISION OF SECTION 21,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 19.504	Point for the center S 1/16 sec. cor. of sec. 21. POINT NOT MONUMENTED
19.80	Trail road, dirt surfaced, 15 lks. wide, bears SE. and NW.
39.008	Point for the center 1/4 sec. cor. of sec. 21, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T38N R18E C 1/4 S21 2009
59.260	Point for the center N 1/16 sec. cor. of sec. 21. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. C N 1/16 S21 C 2009
79.512	The 1/4 sec. cor. of secs. 16 and 21. <hr/> From the 1/4 sec. cor. of secs. 21 and 22. S. 87°23'50" W., on the E-W center line of sec. 21.
42.878	The center 1/4 sec. cor. of sec. 21.
60.10	Fence, bears N. and S.
62.903	Point for the center W 1/16 sec. cor. of sec. 21. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. W 1/16 C—C S21 2009 From this point, the intersection of fences extending N. and N. 82° W., bears S. 63°30' E., 3.15 chs. dist.
68.55	Fence, bears ESE. and WNW.
82.928	The 1/4 sec. cor. of secs. 20 and 21. <hr/>

SUBDIVISION OF SECTION 21,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>From the N 1/16 sec. cor. of secs. 21 and 22. S. 88°09'30" W., on the E-W center line of the NE1/4 of sec. 21.</p>
42.078	<p>The center N 1/16 sec. cor. of sec. 21.</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 21 and 28. N. 0°52'50" W., on the N-S center line of the SW1/4 of sec. 21.</p>
19.620	<p>Point for the SW 1/16 sec. cor. of sec. 21, at intersection with the E-W center line of the SW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SW 1/16 S21 2009</p>
20.60	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears ESE. and WNW.</p>
25.35	<p>Surprise Valley Road, dirt surfaced, 12 lks. wide, bears ESE. and WNW.</p>
25.75	<p>Trail road, dirt surfaced, 10 lks. wide, bears E. and W.</p>
38.20	<p>Fence, bears S. 82° E. and N. 82° W.</p>
39.239	<p>The center W 1/16 sec. cor. of sec. 21.</p> <hr/> <p>From the point for the center S 1/16 sec. cor. of sec. 21. S. 87°04'20" W., on the E-W center line of the SW1/4 of sec. 21.</p>
7.30	<p>Surprise Valley Road, dirt surfaced, 12 lks. wide, bears SE. and NW.</p>
17.20	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears SE. and NW.</p>
20.115	<p>The SW 1/16 sec. cor. of sec. 21.</p>
40.231	<p>The S 1/16 sec. cor. of secs. 20 and 21.</p> <hr/> <p>From the center W 1/16 sec. cor. of sec. 21. N. 0°53'10" W., on the N-S center line of the NW1/4 of sec. 21.</p>
19.994	<p>Point for the NW 1/16 sec. cor. of sec. 21, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

SUBDIVISION OF SECTION 21,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	NW 1/16 S21
	2009
39.987	The W 1/16 sec. cor. of secs. 16 and 21.
	<hr/> From the center N 1/16 sec. cor. of sec. 21. S. 86°38'40" W., on the E-W center line of the NW1/4 of sec. 21.
16.90	Fence, bears N. and S.
19.946	The NW 1/16 sec. cor. of sec. 21.
39.892	The point for the N 1/16 sec. cor. of secs. 20 and 21.
	<hr/> SUBDIVISION OF SECTION 28, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/>
	From the 1/4 sec. cor. of secs. 28 and 33.
	N. 0°23'20" E., on the N-S center line of sec. 28.
20.024	Point for the center S 1/16 sec. cor. of sec. 28.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	$\begin{array}{c} \text{C} \\ \text{S } 1/16 \text{ } \text{ S28} \\ \text{C} \end{array}$
	2009
40.048	Point for the center 1/4 sec. cor. of sec. 28, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T38N R18E C 1/4 S28
	2009
60.194	Point for the center N 1/16 sec. cor. of sec. 28.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} \text{C} \\ \text{N } 1/16 \text{ } \text{ S28} \\ \text{C} \end{array}$
	2009

SUBDIVISION OF SECTION 28,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

80.340	<p>The 1/4 sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 27 and 28. S. 87°55'30" W., on the E-W center line of sec. 28.</p>
22.443	<p>Point for the center E 1/16 sec. cor. of sec. 28.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>E 1/16 C———C S28 2009</p> </div>
44.886	<p>The center 1/4 sec. cor. of sec. 28.</p>
65.125	<p>Point for the center W 1/16 sec. cor. of sec. 28.</p> <p>POINT NOT MONUMENTED</p>
85.364	<p>The 1/4 sec. cor. of secs. 28 and 29.</p> <hr/> <p>From the center E 1/16 sec. cor. of sec. 28. N. 0°04'50" E., on the N-S center line of the NE1/4 of sec. 28.</p>
20.150	<p>Point for the NE 1/16 sec. cor. of sec. 28, at intersection with the E-W center line of the NE1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>NE 1/16 S28 2009</p> </div>
39.90	<p>Nevada State Highway No. 447, asphalt surfaced, 38 lks. wide, bears SE. and NW.</p>
40.298	<p>The point for the E 1/16 sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the point for the N 1/16 sec. cor. of secs. 27 and 28. S. 87°54'30" W., on the E-W center line of the NE1/4 of sec. 28.</p>
22.333	<p>The NE 1/16 sec. cor. of sec. 28.</p>
44.666	<p>The center N 1/16 sec. cor. of sec. 28.</p> <hr/> <p>From the center S 1/16 sec. cor. of sec. 28. S. 88°20'00" W., on the E-W center line of the SW1/4 of sec. 28.</p>

SUBDIVISION OF SECTION 28,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

40.521	<p>The S 1/16 sec. cor. of secs. 28 and 29.</p> <hr/> <p>From the point for the center W 1/16 sec. cor. of sec. 28. N. 0°27'40" E., on the N-S center line of the NW1/4 of sec. 28.</p>
19.941	<p>Point for the NW 1/16 sec. cor. of sec. 28, at intersection with the E-W center line of the NW1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">NW 1/16 S28 2009</p>
39.881	<p>The W 1/16 sec. cor. of secs. 21 and 28.</p> <hr/> <p>From the center N 1/16 sec. cor. of sec. 28. S. 87°20'20" W., on the E-W center line of the NW1/4 of sec. 28.</p>
20.222	<p>The NW 1/16 sec. cor. of sec. 28.</p>
40.444	<p>The N 1/16 sec. cor. of secs. 28 and 29.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 29, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 29 and 32. N. 0°38'20" E., on the N-S center line of sec. 29.</p>
19.885	<p>Point for the center S 1/16 sec. cor. of sec. 29.</p> <p>POINT NOT MONUMENTED</p>
39.770	<p>Point for the center 1/4 sec. cor. of sec. 29, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R18E C 1/4 S29 2009</p>
59.665	<p>Point for the center N 1/16 sec. cor. of sec. 29.</p> <p>POINT NOT MONUMENTED</p>
79.560	<p>The 1/4 sec. cor. of secs. 20 and 29.</p> <hr/>

SUBDIVISION OF SECTION 29,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>From the 1/4 sec. cor. of secs. 28 and 29. N. 89°26'00" W., on the E-W center line of sec. 29.</p>
20.088	<p>Point for the center E 1/16 sec. cor. of sec. 29. POINT NOT MONUMENTED</p>
40.176	<p>The center 1/4 sec. cor. of sec. 29.</p>
71.788	<p>The 1/4 sec. cor. of sec. 29, on the W. bdy. of the Tp.</p> <hr/>
	<p>From the point for the center E 1/16 sec. cor. of sec. 29. N. 0°35'20" E., on the N-S center line of the NE1/4 of sec. 29.</p>
19.816	<p>Point for the NE 1/16 sec. cor. of sec. 29, at intersection with the E-W center line of the NE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. NE 1/16 S29 2009</p>
39.631	<p>The E 1/16 sec. cor. of secs. 20 and 29.</p> <hr/>
	<p>From the N 1/16 sec. cor. of secs. 28 and 29. N. 89°12'00" W., on the E-W center line of the NE1/4 of sec. 29.</p>
20.070	<p>The NE 1/16 sec. cor. of sec. 29.</p>
40.140	<p>The point for the center N 1/16 sec. cor. of sec. 29.</p> <hr/>
	<p>From the E 1/16 sec. cor. of secs. 29 and 32. N. 0°35'20" E., on the N-S center line of the SE1/4 of sec. 29.</p>
19.810	<p>Point for the SE 1/16 sec. cor. of sec. 29, at intersection with the E-W center line of the SE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. SE 1/16 S29 2009</p>
39.619	<p>The point for the center E 1/16 sec. cor. of sec. 29.</p> <hr/>

SUBDIVISION OF SECTION 29,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the S 1/16 sec. cor. of secs. 28 and 29.
	N. 89°38'30" W., on the E-W center line of the SE1/4 of sec. 29.
20.107	The SE 1/16 sec. cor. of sec. 29.
40.214	The point for the center S 1/16 sec. cor. of sec. 29.
<hr/> <p>SUBDIVISION OF SECTION 32, T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>	
	From the 1/4 sec. cor. of sec. 32, on the S. bdy. of the Tp.
	N. 0°10'30" W., on the N-S center line of sec. 32.
40.314	Point for the center 1/4 sec. cor. of sec. 32, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	<p>T38N R18E C 1/4 S32</p>
	2009
60.523	Point for the center N 1/16 sec. cor. of sec. 32.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p>C N 1/16 S32 C</p>
	2009
80.732	The 1/4 sec. cor. of secs. 29 and 32.
<hr/>	
	From the 1/4 sec. cor. of secs. 32 and 33.
	S. 89°50'50" W., on the E-W center line of sec. 32.
20.238	Point for the center E 1/16 sec. cor. of sec. 32.
	POINT NOT MONUMENTED
40.476	The center 1/4 sec. cor. of sec. 32.
71.897	The 1/4 sec. cor. of sec. 32, on the W. bdy. of the Tp.
<hr/>	

SUBDIVISION OF SECTION 32,
T. 38 N., R. 18 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the point for the center E 1/16 sec. cor. of secs. 32. N. 0°20'00" W., on the N-S center line of the NE1/4 of sec. 32.
20.157	Point for the NE 1/16 sec. cor. of sec. 32, at intersection with the E-W center line of the NE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd. NE 1/16 S32 2009
40.314	The E 1/16 sec. cor. of secs. 29 and 32. <hr/>
	From the point for the N 1/16 sec. cor. of secs. 32 and 33. S. 89°59'50" W., on the E-W center line of the NE1/4 of sec. 32.
20.182	The NE 1/16 sec. cor. of sec. 32.
40.364	The center N 1/16 sec. cor. of sec. 32. <hr/>
	S. 89°56'50" W., on the E-W center line of the NW1/4 of sec. 32.
31.339	The N 1/16 sec. cor. of sec. 32, on the W. bdy. of the Tp. <hr/>
	GENERAL DESCRIPTION
	The lands included in this survey are located in Washoe Valley, about 30 miles south-southeasterly of Cedarville, California. The elevations range from about 6000 feet above sea level, in the mountainous terrain located in the easterly and southerly portions of the township, to about 4500 feet above sea level in Surprise Valley. Numerous springs, both hot and cold, are located throughout the township. Vegetation consists of juniper in the higher elevations, sage brush, and with grass and reeds near the springs. The entire township is used mostly for summer grazing of cattle and sheep. Nevada State Highway No. 447 passes through sections 20, 21, 27 and 28, with numerous other trail roads and pack trails located throughout the area. A portion of the Lower Lake bed is located in the northwest portion of section 5. <hr/>

UNITED STATES
DEPARTMENT OF INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Don R. Aschenbach	Cadastral Surveyor
Brock R. Clifford	Cadastral Surveyor
Barbara S. Littel	Professional Land Surveyor
Wayne D. Strickland	Professional Land Surveyor
Chad M. Bartek	Survey Aid

CERTIFICATE OF SURVEY

I, Brett K. Jefferson, Nevada Professional Land Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 24th day of October, 2008, I have dependently resurveyed a portion of the Present California-Nevada State Line, from Witness Mile Post No. 52 1/2 to Mile Post No. 60, a portion of the south boundary, the east boundary, a portion of the north boundary, and the subdivisional lines, and subdivided certain sections, Township 38 North, Range 18 East, of the Mount Diablo Meridian, Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 8, 2012

(Date)


 (Nevada Professional Land Surveyor)

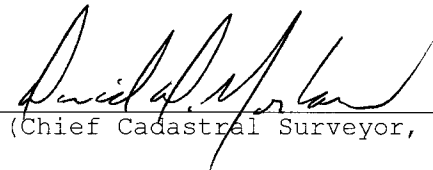
CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the Present California-Nevada State Line, from Witness Mile Post No. 52 1/2 to Mile Post No. 60, a portion of the south boundary, the east boundary, a portion of the north boundary, and the subdivisional lines, and the subdivision of certain sections, Township 38 North, Range 18 East, of the Mount Diablo Meridian, Nevada, executed by Brett K. Jefferson, Nevada Professional Land Surveyor, having been critically examined and found correct, are hereby approved.

June 13, 2012

(Date)


 (Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in T. 38 N., R. 18 E., Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor, Nevada)~~