

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Original

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

PORTIONS OF THE SOUTH AND NORTH BOUNDARIES

AND

A PORTION OF THE SUBDIVISIONAL LINES,

THE SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF CERTAIN SECTIONS,

TOWNSHIP 38 NORTH, RANGE 31 EAST,

OF THE MOUNT DIABLO MERIDIAN,

IN THE STATE OF NEVADA

EXECUTED BY

Thomas E. Casinger, Cadastral Surveyor

Don R. Aschenbach, Cadastral Surveyor

Under Special Instructions dated June 4, 2001, and approved June 4, 2001,
and Supplemental Special Instructions dated August 27, 2001, and approved
August 27, 2001, and dated December 6, 2002, and approved December 6, 2002,
which provided for the surveys included under Group No. 802,
and Assignment Instructions dated June 4, 2001 and November 25, 2002.

Survey commenced June 11, 2001

Survey completed August 26, 2004

INDEX DIAGRAM

TOWNSHIP 38 NORTH, RANGE 31 EAST, MOUNT DIABLO MERIDIAN, NEVADA

		7	6	5	4
6	5	4	28 3	20 2	12 1
	31	32 29	27	19	
7	8 30	9	26 10	18 11	11 12
		31	26	18	
18	17	16	25 15	17 14	10 13
			24	16	
19	20	21	23 22	15 23	9 24
			23	15	
30	29	28	21 27	14 26	9 25
			21	14	8
31	32	33	20 34	13 35	7 36
			3	2	

Subdivision of Section 4 p. 34.
 Subdivision of Section 9 pp. 34 - 35.
 Subdivision of Section 10 pp. 35 - 37.
 Subdivision of Section 27 pp. 37 - 39.

TOWNSHIP 38 NORTH, RANGE 31 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS

The following field notes are those of the dependent resurvey of portions of the south and north boundaries and a portion of the subdivisional lines, the survey of a portion of the subdivisional lines, and the subdivision of certain sections, Township 38 North, Range 31 East, Mount Diablo Meridian, Nevada.

The east boundary, portions of the north and south boundaries and a portion of the subdivisional lines were surveyed by U.S. Deputy Surveyor G.W. Garside in 1874 under Contract No. 65.

The east boundary was dependently resurveyed by Cadastral Surveyor W.H. Sylvester in 1959 under Group No. 376.

Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners and other calls of the original field note record.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with identified corner locations. In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, the Special Instructions dated June 4, 2001, and the Supplemental Special Instructions dated August 27, 2001, and December 6, 2002, for Group No. 802.

The direction and distances of the lines of this survey were obtained by Trimble 4400 and 4700 Global Positioning System (GPS) receivers using the real-time kinematic method and refer to the true meridian, based on geodetic methods. The mean bearings of the lines and horizontal equivalents of the ground distances only are entered in the field notes.

The geographic position NAD 1983 (1994) of the corner of sections 1, 2, 35 and 36, on the south boundary of the township, as determined by survey grade GPS receivers, in 2001, from National Geodetic Survey control (formerly U.S. Coast and Geodetic Survey triangulation) station "ROBERTS", located in section 25, T. 38 N., R. 32 E., is as follows:

Latitude 41°06'59.758" N. Longitude 118°28'24.661" W.

The mean magnetic declination is 16° E., as shown on U.S. Geological Survey 7 1/2 minute quadrangle map "SCHOOLHOUSE BUTTE, NEVADA", provisional edition, dated 1990.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Reestablishment of a Portion of the Survey Executed by U. S. Deputy Surveyor G.W. Garside in 1874										
	<p>Beginning at the cor. of secs. 1, 2, 35 and 36, monumented with a trap stone, 10x8x6 ins., loosely set in a small mound of stone, plainly mkd. with 1 notch on E. edge and 5 notches on W. edge, (Record, charred post), with a steel fence post alongside, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>S35</td><td>S36</td></tr> <tr><td>S 2</td><td>S 1</td></tr> <tr><td colspan="2">T37N</td></tr> </table> <p>2001</p> </div> <p>Bury the mkd. stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.</p> <p>From this cor., National Geodetic Survey control (formerly U.S. Coast and Geodetic Survey triangulation) station "ROBERTS", bears N. 79°51'50" E. (mean bearing), 520.820 chs. dist., monumented with a standard brass tablet cemented in solid rock, mkd. ROBERTS 1965.</p> <p>S. 87°16'30" W., bet. secs. 2 and 35.</p> <p>Over nearly level terrain.</p>	T38N	R31E	S35	S36	S 2	S 1	T37N			
T38N	R31E										
S35	S36										
S 2	S 1										
T37N											
36.50	Shawnee Creek, 10 lks. wide, course NE.										
42.150	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td colspan="2">S35</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td colspan="2">S 2</td></tr> <tr><td colspan="2">T37N</td></tr> </table> <p>2001</p> </div> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>	T38N	R31E	S35		1/4	—	S 2		T37N	
T38N	R31E										
S35											
1/4	—										
S 2											
T37N											
51.70	Trail road, 18 lks. wide, bears NE. and SW.										
84.300	Point for the cor. of secs. 2, 3, 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.										

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS													
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>S34</td><td>S35</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 3</td><td>S 2</td></tr> <tr><td colspan="2">T37N</td></tr> </table> <p>2001</p> </div> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/>	T38N	R31E	S34	S35	<hr/>		S 3	S 2	T37N			
T38N	R31E												
S34	S35												
<hr/>													
S 3	S 2												
T37N													
	<p>S. 87°16'30" W., bet. secs. 3 and 34.</p> <p>Over rolling terrain.</p>												
42.150	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>S34</td><td></td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>1/4</td><td></td></tr> <tr><td>S 3</td><td></td></tr> <tr><td colspan="2">T37N</td></tr> </table> <p>2001</p> </div> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>	T38N	R31E	S34		<hr/>		1/4		S 3		T37N	
T38N	R31E												
S34													
<hr/>													
1/4													
S 3													
T37N													
82.30	<p>Ravine, drains SE.</p>												
84.300	<p>The cor. of secs. 3, 4, 33 and 34, monumented with a basalt stone, 24x12x7 ins., firmly set 18 ins. in the ground, plainly mkd. with 6 grooves on S. face and 3 grooves on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>S33</td><td>S34</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2">T37N</td></tr> </table> <p>2001</p> </div> <p>Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>	T38N	R31E	S33	S34	<hr/>		S 4	S 3	T37N			
T38N	R31E												
S33	S34												
<hr/>													
S 4	S 3												
T37N													

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>From this cor., a mound of stone, 3 1/2 ft. diam., 1 ft. high, bears N. 45°09'30" E., 10.732 chs. dist., with a wooden post, 36 ins. long, 3 ins. diam., laying alongside mkd. with 3 grooves on a face and 6 notches on an adjoining edge.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF NORTH BOUNDARY, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1874</p> <hr/> <p>From the cor. of Tps. 38 and 39 N., Rs. 31 and 32 E., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above the ground, in a mound of stone, 2 1/2 ft. diam., 1 ft. high, with brass cap mkd. as described in the field notes of the 1959 dependent resurvey of T. 38 N., R. 32 E., executed under Group No. 376.</p> <p>S. 87°13'10" W., bet. secs. 1 and 36.</p>
20.283	<p>Point for the E 1/16 sec. cor. of secs. 1 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>S36 E 1/16 ——— S 1 2001</p> </div> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of cor.</p>
28.30	<p>Trout Creek, 10 lks. wide, course irregularly SE.</p>
40.566	<p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T39N R31E S36 1/4 ——— S 1 T38N 2001</p> </div> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
44.60	<p>Trout Creek Road, 24 lks. wide, bears NW. and SE.</p>
60.849	<p>Point for the W 1/16 sec. cor. of secs. 1 and 36.</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">S36 W 1/16 — S 1 2001</p>
	<p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
79.10	Louse Creek, 15 lks. wide, course irregularly SE.
81.132	<p>Point for the cor. of secs. 1, 2, 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3-1/2 in. stem, in a boulder, 36 ins. x 25 ins., projecting 18 ins. above the ground, with top mkd.</p> <p style="text-align: center;">T39N R31E S35 S36 — — S 2 S 1 T38N 2001</p> <p>From this cor., an embedded mound of stone, 2 ft. diam., bears N. 12°35'00" W., 6.857 chs. dist.</p> <hr/> <p>S. 87°13'10" W., bet. secs. 2 and 35.</p> <p>Over rolling terrain.</p>
4.90	Dry channel, drains SE.
12.60	Dry channel, drains SE.
23.00	Trail road, 18 lks. wide, bears NW. and SE.
40.566	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with a trap stone, 15x10x4 ins., firmly set 10 ins. in the ground, plainly mkd. 1/4 on S. face, with a small mound of stone S. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T39N R31E S35 1/4 — S 2 T38N 2001</p>

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS											
	<p>Bury the original stone alongside the stainless steel post.</p> <hr/> <p>N. 89°21'10" W., beginning new measurement.</p>										
16.90	<p>Dry channel, drains SE.</p>										
40.835	<p>The cor. of secs. 2, 3, 34 and 35, monumented with a trap stone, 17x9x9 ins., firmly set 10 ins. in the ground, plainly mkd. with 6 notches on S. edge and 2 notches on E. edge, with a small mound of stone N. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T39N</td> <td>R31E</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td>S 3</td> <td>S 2</td> </tr> <tr> <td colspan="2">T38N</td> </tr> </table> <p>2001</p> </div> <p>Bury the original stone alongside the stainless steel post.</p> <hr/> <p>N. 84°34'10" W., bet. secs. 3 and 34.</p> <p>Over nearly level terrain.</p>	T39N	R31E	S34	S35	S 3	S 2	T38N			
T39N	R31E										
S34	S35										
S 3	S 2										
T38N											
40.986	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T39N</td> <td>R31E</td> </tr> <tr> <td>S34</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 3</td> <td></td> </tr> <tr> <td colspan="2">T38N</td> </tr> </table> <p>2001</p> </div>	T39N	R31E	S34		1/4	—	S 3		T38N	
T39N	R31E										
S34											
1/4	—										
S 3											
T38N											
81.972	<p>The cor. of secs. 3, 4, 33 and 34, monumented with a trap stone, 10x10x9 ins., firmly set 6 ins. in the ground, plainly mkd. with 6 grooves on S. face, with a lone stone alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p>										

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T39N R31E S33 S34 ----- S 4 S 3 T38N</p> <p style="text-align: center;">2001</p> <p>Bury the original stone alongside the stainless steel post.</p> <hr/>
40.000	<p>WEST, bet. secs. 4 and 33.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 4 and 33, determined at record bearing and distance from the cor. of secs. 3, 4, 33 and 34; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T39N R31E S33 1/4 — S 4 T38N</p> <p style="text-align: center;">2001</p> <hr/>
25.80 35.50 38.30 40.233	<p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor G.W. Garside in 1874</p> <hr/> <p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°04'50" W., bet. secs. 35 and 36.</p> <p>Over nearly level terrain.</p> <p>Dry channel, drains NE.</p> <p>Shawnee Creek, 10 lks. wide, course irregularly NE.</p> <p>Trail road, 15 lks. wide, bears NE. and SW.</p> <p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E 1/4 S35 S36</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>
54.20	Dry channel, drains NE.
63.50	Dry channel, drains SE.
80.466	<p>Point for the cor. of secs. 25, 26, 35 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S26 S25 ----- S35 S36</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as described in the field notes of the 1959 dependent resurvey of T. 38 N., R. 32 E., executed under Group No. 376.</p> <p>S. 88°30'00" W., bet. secs. 25 and 36.</p> <p>Over nearly level terrain.</p>
16.50	Trail road, 24 lks. wide, bears NE. and SW.
29.80	Shawnee Creek, 10 lks. wide, course irregularly NE.
41.526	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S25 1/4 ——— S36</p> <p style="text-align: center;">2001</p>
83.052	The cor. of secs. 25, 26, 35 and 36.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>N. 0°53'40" E., bet. secs. 25 and 26.</p> <p>Over nearly level terrain.</p>
12.40	<p>Dry creek, 10 lks. wide, drains NE.</p>
27.80	<p>Trail road, 24 lks. wide, bears NW. and SE.</p>
40.238	<p>The 1/4 sec. cor. of secs. 25 and 26, monumented with a trap stone, 8x7x5 ins., loosely set 3 ins. in the ground, plainly mkd. 1/4 on W. face, with a small mound of stone, W. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R31E 1/4 S26 S25</p> <p>2001</p> </div> <p>Bury the original stone alongside the stainless steel post.</p> <p>Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 0°11'10" E., beginning new measurement.</p>
14.00	<p>Bull Creek, 10 lks. wide, course irregularly ESE.</p>
26.90	<p>Dry channel, drains SE.</p>
40.754	<p>The cor. of secs. 23, 24, 25 and 26, monumented with a trap stone, 14x8x5 ins., loosely set in a mound of stone, 2 1/2 ft. diam., 1 ft. high, plainly mkd. with 2 grooves on S. face and 1 groove on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R31E S23 S24 <hr style="width: 10%; margin: 0 auto;"/>S26 S25</p> <p>2001</p> </div> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 0°18'00" E., bet. secs. 23 and 24.</p> <p>Over nearly level terrain.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
6.70	Dry creek, 10 lks. wide, drains irregularly ENE.
37.00	Dry creek, 10 lks. wide, drains SE.
40.788	<p>The 1/4 sec. cor. of secs. 23 and 24, monumented with a trap stone, 17x10x6 ins., loosely set in a small mound of stone, plainly mkd. 1/4 on W. face, with a mound of stone, 2 1/2 ft. diam., 1 ft. high, E. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S23 S24</p> <p style="text-align: center;">2001</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°25'30" E., beginning new measurement.</p>
29.40	Little Cedar Creek, 3 lks. wide, course irregularly ESE.
40.627	<p>The cor. of secs. 13, 14, 23 and 24, monumented with a trap stone, 12x10x6 ins., firmly set 6 ins. in the ground, plainly mkd. with 3 notches on S. edge and 1 groove on E. face, with a mound of stone, 2 1/2 ft. diam., 1 ft. high, W. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S14 S13 <hr style="width: 10%; margin: auto;"/>S23 S24</p> <p style="text-align: center;">2001</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Rebuild the mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°11'00" E., bet. secs. 13 and 14.</p> <p>Over nearly level terrain.</p>
8.80	Trail road, 15 lks. wide, bears E. and W.
21.90	Dry channel, drains E.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.669	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with a trap stone, 11x7x4 ins., firmly set in a mound of stone, plainly mkd. 1/4 on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R31E 1/4 S14 S13</p> <p>2001</p> </div> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0°03'50" W., beginning new measurement.</p>
17.70	<p>Dry channel, drains E.</p>
40.810	<p>The cor. of secs. 11, 12, 13 and 14, monumented with a trap stone, 15x7x6 ins., laying loose in a scattered mound of stone, plainly mkd. with 2 grooves and 1 groove on opposite faces.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T38N R31E S11 S12 <hr style="width: 20%; margin: 0 auto;"/>S14 S13</p> <p>2001</p> </div> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, W. of cor.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0°14'20" E., bet. secs. 11 and 12.</p> <p>Over nearly level terrain.</p>
1.50	<p>Dry channel, drains SE.</p>
28.50	<p>Big Cedar Creek, 10 lks. wide, course irregularly SE.</p>
40.560	<p>The 1/4 sec. cor. of secs. 11 and 12, monumented with a trap stone, 20x12x10 ins., firmly set in a mound of stone, plainly mkd. 1/4 on E. face.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S11 S12</p> <p style="text-align: center;">2001</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <hr/> <p>N. 0°02'10" E., beginning new measurement.</p>
22.10	Trail road, 15 lks. wide, bears NE. and SW.
41.066	<p>The cor. of secs. 1, 2, 11 and 12, monumented with a trap stone, 20x8x8 ins., laying loose in a scattered mound of stone, plainly mkd. with 1 groove on each of two adjoining faces.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S 2 S 1 ----- S11 S12</p> <p style="text-align: center;">2001</p> <p>Bury the original stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.</p> <hr/> <p>N. 4°58'20" E., bet. secs. 1 and 2.</p> <p>Over rolling terrain.</p>
22.80	Trail road, 15 lks. wide, curving from SE. to W.
27.40	Dry creek, 10 lks. wide, drains E.
39.700	<p>Point for the 1/4 sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E 1/4 S 2 S 1 2003</p>
	Set a steel fence post, 5 ft. long, alongside the stainless steel post.
55.00	Dry creek, 10 lks. wide, drains SE.
67.40	Trail road, 15 lks. wide, bears NW. and SE.
70.00	Dry channel, drains SE.
74.80	Dry channel, drains SE.
79.698	The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 0°57'20" E., bet. secs. 34 and 35.</p> <p>Over rolling terrain.</p>
23.30	Dry creek, 10 lks. wide, drains NE.
28.30	Dry creek, 10 lks. wide, drains NE.
40.167	Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R31E 1/4 S34 S35 2001</p>
	Set a steel fence post, 5 ft. long, alongside the stainless steel post.
	From this point, a spring bears N. 35°25' E., 22.40 chs. dist.
58.40	Dry channel, drains E.
80.334	Point for the cor. of secs. 26, 27, 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E S27 S26 ----- S34 S35</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/>
	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>S. 87°07'40" W., bet. secs. 26 and 35.</p> <p>Over rolling terrain.</p>
41.419	<p>Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R31E S26 1/4 --- S35</p> <p style="text-align: center;">2001</p>
60.20	<p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <p>Dry creek, 10 lks. wide, drains SE.</p>
82.838	<p>The cor. of secs. 26, 27, 34 and 35.</p> <hr/>
	<p>N. 1°04'00" E., bet. secs. 26 and 27.</p> <p>Over rolling terrain.</p>
3.30	<p>Dry channel, drains N. 70° E.</p>
21.10	<p>Dry channel, drains E.</p>
34.80	<p>Dry channel, drains SE.</p>
40.168	<p>Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R31E 1/4 S27 S26</p> <p style="text-align: center;">2001</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>								
43.90	Dry channel, drains SE.								
55.10	Trail road, 24 lks. wide, bears NW. and SE.								
64.20	Bull Creek, 8 lks. wide, course irregularly E.								
80.336	<p>Point for the cor. of secs. 22, 23, 26 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T38N</td> <td>R31E</td> </tr> <tr> <td>S22</td> <td>S23</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> </table> <p>2001</p> </div> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>S. 86°38'20" W., bet. secs. 23 and 26.</p> <p>Over gently rolling terrain.</p>	T38N	R31E	S22	S23			S27	S26
T38N	R31E								
S22	S23								
S27	S26								
41.060	<p>Point for the 1/4 sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T38N</td> <td>R31E</td> </tr> <tr> <td></td> <td>S23</td> </tr> <tr> <td>1/4</td> <td style="border-top: 1px solid black;"></td> </tr> <tr> <td></td> <td>S26</td> </tr> </table> <p>2001</p> </div> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>	T38N	R31E		S23	1/4			S26
T38N	R31E								
	S23								
1/4									
	S26								
82.120	<p>The cor. of secs. 22, 23, 26 and 27.</p> <hr/> <p>N. 6°59'20" W., bet. secs. 22 and 23.</p> <p>Over gently rolling terrain.</p>								
18.80	Dry creek, 10 lks. wide, drains E.								
38.10	Dry channel, drains E.								

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.462	<p>The 1/4 sec. cor. of secs. 22 and 23, monumented with a trap stone, 17x11x4 ins., firmly set in a small mound of stone, plainly mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S22 S23</p> <p style="text-align: center;">2003</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>N. 0°51'30" W., beginning new measurement.</p>
10.00	Dry channel, drains NE.
27.80	Dry channel, drains NE.
39.50	Dry channel, drains NE.
42.345	<p>The cor. of secs. 14, 15, 22 and 23, monumented with a flat trap stone, 14x11x4 ins., firmly lying flush with the ground, plainly mkd. with 3 grooves on S. face and 2 grooves on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S15 S14 ----- S22 S23</p> <p style="text-align: center;">2002</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>S. 87°34'30" W., bet. secs. 14 and 23.</p> <p>Over gently rolling terrain.</p>
15.90	Little Cedar Creek, 10 lks. wide, course irregularly SE.
44.055	Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S14 1/4 — S23 2002</p>
88.110	<p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <p>The cor. of secs. 14, 15, 22 and 23.</p> <hr/>
	<p>N. 0°32'30" W., bet. secs. 14 and 15.</p> <p>Over gently rolling terrain.</p>
13.70	<p>Dry creek, 10 lks. wide, drains SE.</p>
26.50	<p>Dry creek, 10 lks. wide, drains SE.</p>
37.10	<p>Little Cedar Creek, 10 lks. wide, course SE.</p>
38.40	<p>Trail road, 18 lks. wide, bears NW. and SE.</p>
40.547	<p>The 1/4 sec. cor. of secs. 14 and 15, monumented with a trap stone, 6x6x4 ins., laying loose in a small mound of stone, plainly mkd. 1/4 on a face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S15 S14 2002</p>
	<p>Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>N. 0°29'50" W., beginning new measurement.</p>
30.60	<p>Dry channel, drains SE.</p>
40.599	<p>The cor. of secs. 10, 11, 14 and 15, monumented with a trap stone, 14x7x5 ins., firmly set 8 ins. in the ground, plainly mkd. with 4 grooves on S. face and 2 grooves on E. face, with a mound of stone W. of cor.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E S10 S11 ----- S15 S14</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>Rebuild the mound of stone, 3 ft. base, 1 ft. high, W. of cor.</p> <hr/> <p>From the cor. of secs. 11, 12, 13 and 14.</p> <p>S. 87°22'40" W., bet. secs. 11 and 14.</p> <p>Over gently rolling terrain.</p>
44.463	<p>Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, over a plastic encased-magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R31E S11 1/4 ——— S14</p> <p style="text-align: center;">2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
69.60	<p>Dry creek, 10 lks. wide, drains SE.</p>
88.926	<p>The cor. of secs. 10, 11, 14 and 15.</p> <hr/> <p>N. 10°22'30" E., bet. secs. 10 and 11.</p> <p>Over gently rolling terrain.</p>
13.00	<p>Dry creek, 10 lks. wide, drains SE.</p>
35.00	<p>Dry wash, 10 lks. wide, drains SE.</p>
44.384	<p>Point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R31E 1/4 S10 S11</p> <p style="text-align: center;">2001</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
66.576	<p>Point for the N 1/16 sec. cor. of secs. 10 and 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S10 S11</p> <p style="text-align: center;">2001</p>
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
76.90	Trail road, 18 lks. wide, bears NE. and SW.
77.50	Big Cedar Creek, 8 lks. wide, course E.
84.00	Dry channel, drains SE.
88.768	<p>The cor. of secs. 2, 3, 10 and 11, monumented with a trap stone, 13x9x8 ins., firmly set in a mound of stone, plainly mkd. with 5 notches on S. edge and 2 notches on E. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S 3 S 2 ----- S10 S11</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.</p>
36.520	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 88°43'40" W., bet. secs. 2 and 11.</p> <p>Over rolling terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>T38N R31E S 2 1/4 — S11</p> <p>2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>
60.70	Trail road, 18 lks. wide, bears NW. and SE.
73.040	The cor. of secs. 2, 3, 10 and 11.
	<hr/> <p>N. 1°04'50" W., bet. secs. 2 and 3.</p> <p>Over rolling terrain.</p>
9.10	Trail road, 18 lks. wide, bears NW. and SE.
17.80	Trail road, 18 lks. wide, bears E. and W.
22.60	Dry channel, drains NE.
37.20	Dry creek, 6 lks. wide, drains E.
38.238	Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate distance; there is no remaining evidence of the original corner.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p>T38N R31E 1/4 S 3 S 2</p> <p>2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post and raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.</p>
66.40	Dry creek, 8 lks. wide, drains SE.
76.285	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 1°44'30" E., bet. secs. 33 and 34.</p> <p>Over gently rolling terrain.</p>
1.80	Dry creek, 10 lks. wide, drains SE.
42.324	Point for the 1/4 sec. cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S33 S34</p> <p style="text-align: center;">2001</p>
43.50	Ravine, drains E.
66.70	Ravine, drains E.
84.648	<p>The cor. of secs. 27, 28, 33 and 34, monumented with a trap stone, 17x10x5 ins., firmly set in a mound of stone, plainly mkd. with 1 groove on S. face and 3 grooves on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S28 S27 ----- S33 S34</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>N. 89°48'20" W., bet. secs. 27 and 34.</p> <p>Over mountainous terrain.</p>
41.476	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S27 1/4 ——— S34</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>
82.952	<p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/> <p>N. 1°29'10" E., bet. secs. 27 and 28.</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Over mountainous terrain.
7.40	Dry creek, 10 lks. wide, drains E.
29.00	Ravine, drains E.
40.50	Ravine, drains E.
43.070	The 1/4 sec. cor. of secs. 27 and 28, monumented with a trap stone, 12x10x4 ins., loosely set in a small mound of stone, plainly mkd. 1/4 on E. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	T38N R31E 1/4 S28 S27 2001
	Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.

	N. 1°29'20" E., beginning new measurement.
18.20	Trail road, 18 lks. wide, bears E. and W.
20.517	Point for the N 1/16 sec. cor. of secs. 27 and 28.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	N 1/16 S28 S27 2001
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
21.00	Bull Creek, 8 lks. wide, course NE.
28.50	Dry channel, drains E.
41.034	The cor. of secs. 21, 22, 27 and 28, monumented with a trap stone, 19x6x6 ins., firmly set in a mound of stone, plainly mkd. with 2 grooves on S. face and 3 grooves on E. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E S21 S22 ----- S28 S27</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 87°11'30" W., bet. secs. 22 and 27.</p> <p>Over rolling and broken terrain.</p>
20.10	Dry creek, 10 lks. wide, drains SE.
41.172	<p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>
	<p style="text-align: center;">T38N R31E S22 1/4 ——— S27</p> <p style="text-align: center;">2001</p> <p>Set a steel fence post, 5 ft. long, alongside the stainless steel post.</p>
61.758	<p>Point for the W 1/16 sec. cor. of secs. 22 and 27.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">S22 W 1/16 ——— S27</p> <p style="text-align: center;">2001</p>
82.344	The cor. of secs. 21, 22, 27 and 28.
	<hr/> <p>N. 1°44'30" E., bet. secs. 21 and 22.</p> <p>Over rolling and broken terrain.</p>
7.00	Dry creek, 10 lks. wide, drains SE.
41.469	<p>The 1/4 sec. cor. of secs. 21 and 22, monumented with a trap stone, 15x6x4 ins., firmly set in a small mound of stone, plainly mkd. 1/4 on W. face.</p> <p>At the corner point</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S21 S22</p> <p style="text-align: center;">2003</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 2°34'50" E., beginning new measurement.</p>
5.90	Ravine, drains E.
25.50	Ravine, drains E.
40.651	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a trap stone, 11x9x8 ins., firmly set 6 ins. in the ground, plainly mkd. with 3 grooves on S. face and 3 grooves on E. face, with a lone stone alongside.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S16 S15 ----- S21 S22</p> <p style="text-align: center;">2003</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 87°12'20" W., bet. secs. 15 and 22.</p> <p>Over rolling and broken terrain.</p>
8.50	Dry creek, 10 lks. wide, drains SE.
36.833	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S15 1/4 — S22</p> <p style="text-align: center;">2003</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Set a steel fence post, 5 ft. long, alongside the stainless steel post.
73.666	The cor. of secs. 15, 16, 21 and 22.
	<hr/> <p>N. 1°11'10" E., bet. secs. 15 and 16.</p> <p>Over rolling and broken terrain.</p>
4.30	Dry channel, in ravine, drains NE., then SE.
8.10	Dry channel, drains SE.
26.80	Dry channel, drains NE., then SE.
32.20	Dry channel, drains SE.
41.514	The 1/4 sec. cor. of secs. 15 and 16, monumented with a trap stone, 10x10x7 ins., firmly set in a small mound of stone, plainly mkd. 1/4 on W. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.
	<p>T38N R31E 1/4 S16 S15</p> <p>2003</p>
	Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.
	<hr/> <p>N. 1°22'50" E., beginning new measurement.</p>
5.10	Dry creek, 20 lks. wide, drains SE.
23.00	Little Cedar Creek, 10 lks. wide, course SE.
31.60	Trail road, 20 lks. wide, bears NW. and SE.
40.686	The cor. of secs. 9, 10, 15 and 16, monumented with a trap stone, 13x11x4 ins., firmly set 8 ins. in the ground, plainly mkd. with 4 grooves on S. face and 3 grooves on E. face, with a mound of stone, W. of cor.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	<p>T38N R31E S 9 S10 ----- S16 S15</p> <p>2001</p>

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Bury the original stone and set a carsonite post, 5 ft. long, alongside the stainless steel post.
	<hr/>
	From the cor. of secs. 10, 11, 14 and 15.
	N. 86°16'10" W., bet. secs. 10 and 15.
	Over rolling and broken terrain.
24.00	Dry creek, 10 lks. wide, drains SE.
35.570	Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate distance; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R31E S10 1/4 — S15</p>
	<p style="text-align: center;">2001</p>
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
71.140	The cor. of secs. 9, 10, 15 and 16.
	<hr/>
	N. 1°26'30" E., bet. secs. 9 and 10.
	Over rolling and broken terrain.
32.50	Dry creek, 10 lks. wide, drains SE.
41.421	The 1/4 sec. cor. of secs. 9 and 10, monumented with a trap stone, 14x10x4 ins., firmly set in a small mound of stone, plainly mkd. 1/4 on W. face.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;">T38N R31E 1/4 S 9 S10</p>
	<p style="text-align: center;">2001</p>
	Bury the original stone alongside the stainless steel post.
	<hr/>
	N. 1°08'10" E., beginning new measurement.
17.00	Ravine, drains SE.
21.225	Point for the N 1/16 sec. cor. of secs. 9 and 10.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">N 1/16 S 9 S10</p> <p style="text-align: center;">2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
26.20	Trail road, 18 lks. wide, bears NW. and SE.
33.30	Big Cedar Creek, 12 lks. wide, course irregularly SE.
42.450	<p>The cor. of secs. 3, 4, 9 and 10, monumented with a trap stone, 12x10x4 ins., firmly set in a small mound of stone, plainly mkd. with 4 grooves on S. face and 3 grooves on E. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S 4 S 3 ----- S 9 S10</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <p>From this cor., a spring, 20 ft. diam., bears N. 70 1/2° E., 12.70 chs. dist.</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>N. 89°13'00" W., bet. secs. 3 and 10.</p> <p>Over rolling and broken terrain.</p>
21.271	<p>Point for the E 1/16 sec. cor. of secs. 3 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 3 E 1/16 ——— S10</p> <p style="text-align: center;">2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
42.542	Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">T38N R31E S 3 1/4 — S10 2001</p>
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
	Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.
60.60	Dry creek, 8 lks. wide, drains irregularly SE.
63.813	Point for the W 1/16 sec. cor. of secs. 3 and 10.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">S 3 W 1/16 — S10 2003</p>
	Set a steel fence post, 5 ft. long, alongside the stainless steel post.
85.084	The cor. of secs. 3, 4, 9 and 10.
	<p>N. 1°13'50" E., bet. secs. 3 and 4. Over rolling and broken terrain.</p>
11.30	Ravine, drains SE.
21.103	Point for the S 1/16 sec. cor. of secs. 3 and 4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p style="text-align: center;">S 1/16 S 4 S 3 2003</p>
	Set a steel fence post, 5 ft. long, alongside the stainless steel post.
27.70	Trail road, bears NW. and SE.
32.50	Ravine, drains SE.
42.206	The 1/4 sec. cor. of secs. 3 and 4, monumented with a trap stone, 14x6x6 ins., firmly set in a small mound of stone, plainly mkd. 1/4 on W. face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S 4 S 3</p> <p style="text-align: center;">2001</p> <p>Bury the original stone and set a steel fence post, 5 ft. long, alongside the stainless steel post.</p> <hr/> <p>N. 1°33'50" E., beginning new measurement.</p>
33.70	Dry channel, drains SE.
40.688	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>WEST, bet. secs. 4 and 9.</p> <p>Over rolling terrain, through sagebrush and native grasses.</p>
14.20	Big Cedar Creek, 8 lks. wide, course SE.
23.20	Trail road, 18 lks. wide, bears NW. and SE.
40.000	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, determined at record bearing and distance from the cor. of secs. 3, 4, 9 and 10; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E S 4 1/4 — S 9</p> <p style="text-align: center;">2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <hr/>

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS									
	<p>From the point for the cor. of secs. 8 and 17 only, determined WEST, 80.000 chs. dist. and NORTH, 320.000 chs. dist. from the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>S 8</td><td> </td></tr> <tr><td>—</td><td> S16</td></tr> <tr><td>S17</td><td> </td></tr> </table> <p>2002</p> </div> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>NORTH, on the E. bdy. of sec. 8.</p> <p>Over rolling mountainous and broken terrain, through scattering juniper.</p>	T38N	R31E	S 8		—	S16	S17	
T38N	R31E								
S 8									
—	S16								
S17									
7.50	Ravine, drains E.								
12.928	The closing cor. of secs. 9 and 16, hereinafter described.								
23.60	Spur, slopes E.								
34.80	Ravine, drains NE.								
39.00	Ridge, bears NE. and SW.								
40.000	Point for the 1/4 sec. cor. of sec. 8 only.								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T38N</td><td>R31E</td></tr> <tr><td>1/4 S 8</td><td> </td></tr> </table> <p>2002</p> </div> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>	T38N	R31E	1/4 S 8					
T38N	R31E								
1/4 S 8									
46.90	Creek, 6 lks. wide, course NE.								
54.853	The 1/4 sec. cor. of sec. 9 only, hereinafter described.								
59.00	Spur, slopes E.								
66.80	Little Cedar Creek, 6 lks. wide, course E.								
80.000	Point for the cor. of secs. 5 and 8 only.								
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p>								

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<div style="text-align: center;"> T38N R31E S 5 <hr style="width: 10%; margin: 0 auto;"/> S 8 S 9 </div> <p style="text-align: center;">2002</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>Raise a mound of stone, 4 ft. base, 1 1/2 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky and sandy. Timber, pinon pine and juniper. Undergrowth, sagebrush and native grasses.</p> <hr/> <p>NORTH, on the E. bdy. of sec. 5.</p> <p>Over rolling mountainous and broken terrain, through sagebrush and native grasses.</p>
6.20	Ravine, drains SE.
16.778	The closing cor. of secs. 4 and 9, hereinafter described.
18.50	Trail road, 18 lks. wide, bears E. and W.
22.00	Ridge, bears NW. and SE.
40.000	Point for the 1/4 sec. cor. of sec. 5 only.
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> T38N R31E 1/4 S 5 </div> <p style="text-align: center;">2002</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>Land, mountainous. Soil, rocky and sandy. Timber, juniper. Undergrowth, sagebrush and native grasses.</p> <hr/> <p>From the cor. of secs. 9, 10, 15 and 16, hereinbefore described.</p> <p>WEST, on the S. bdy. of sec. 9.</p> <p>Over rolling mountainous terrain, through sagebrush and native grasses.</p>
15.80	Trail road, 18 lks. wide, bears NW. and SE.
23.80	Little Cedar Creek, 8 lks. wide, course SE.

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
40.000	<p>Point for the 1/4 sec. cor. of sec. 9 only.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E 1/4 S 9 -----</p> <p style="text-align: center;">2002</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
50.50	Ravine, drains NE.
80.000	<p>Point for the 80 1/16 sec. cor. of sec. 9 only.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">1/16 S 9 80 -----</p> <p style="text-align: center;">2004</p>
88.70	Ravine, drains SE.
89.610	<p>Intersect the E. bdy. of sec. 8.</p> <p>Point for the closing cor. of secs. 9 and 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">S 8 T38N S 9 ----- CC S16 R31E</p> <p style="text-align: center;">2002</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>From this point, the cor. of secs. 8 and 17 only, bears SOUTH, 12.928 chs. dist.</p> <p>Land, mountainous. Soil, rocky and sandy. Timber, juniper. Undergrowth, sagebrush and native grasses.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 4 and 9, hereinbefore described. WEST, bet. secs. 4 and 9.</p>

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS																
	Over rolling mountainous terrain, through sagebrush and native grasses.															
7.50	Ridge, bears N. and S.															
37.30	Trail road, 18 lks. wide, bears NE. and SW.															
40.000	Point for the 80 1/16 sec. cor. of secs. 4 and 9. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd. <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>S 4</td><td></td></tr> <tr><td>1/16</td><td>—</td><td>80</td></tr> <tr><td></td><td>S 9</td><td></td></tr> </table> <p>2004</p> </div>		S 4		1/16	—	80		S 9							
	S 4															
1/16	—	80														
	S 9															
47.80	Trail road, 18 lks. wide, bears NW. and SE.															
51.473	Intersect the E. bdy. of sec. 5. Point for the closing cor. of secs. 4 and 9. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, over a plastic-encased magnet, in a mound of stone, 3 ft. base, to top, with brass cap mkd. <div style="text-align: center;"> <table style="margin-left: auto; margin-right: auto;"> <tr><td></td><td>T38N</td><td></td></tr> <tr><td></td><td>S 4</td><td></td></tr> <tr><td>S 5</td><td>—</td><td>CC</td></tr> <tr><td></td><td>S 9</td><td></td></tr> <tr><td></td><td>R31E</td><td></td></tr> </table> <p>2002</p> </div> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>From this point, the cor. of secs. 5 and 8 only, bears SOUTH, 16.778 chs. dist.</p> <p>Land, mountainous. Soil, rocky and sandy. Timber, juniper. Undergrowth, sagebrush and native grasses.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 9 only, determined latitudinally at midpoint between the closing cor. of secs. 4 and 9 and the closing cor. of secs. 9 and 16, and on the E. bdy. of sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>		T38N			S 4		S 5	—	CC		S 9			R31E	
	T38N															
	S 4															
S 5	—	CC														
	S 9															
	R31E															

SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	<p style="text-align: center;">T38N R31E</p> <p style="text-align: center;"> 1/4 S 9</p> <p style="text-align: center;">2002</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p> <p>From this point, the 1/4 sec. cor. of sec. 8 only, bears SOUTH, 14.853 chs. dist.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 4, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 4 and 9.</p> <p>N. 1°23'10" E., on the N-S center line of sec. 4.</p> <p>Over rolling terrain.</p> <p>4.20 Trail road, 18 lks. wide, bears E. and W.</p> <p>11.70 Big Cedar Creek, 6 lks. wide, course SE.</p> <p>15.30 Trail road, 20 lks. wide, bears E. and W.</p> <p>62.50 Ravine, drains SE.</p> <p>82.893 The 1/4 sec. cor. of secs. 4 and 33, on the N. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 9, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of sec. 9 only.</p> <p>N. 1°16'50" E., on the N-S center line of sec. 9.</p> <p>Over rolling terrain.</p> <p>1.90 Little Cedar Creek, 10 lks. wide, course SE.</p> <p>33.90 Ravine, drains SE.</p> <p>41.647 Point for the center 1/4 sec. cor. of sec. 9, at intersection with the E-W center line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, over a plastic-encased magnet, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T38N R31E C 1/4 S 9</p> <p style="text-align: center;">2002</p>

SUBDIVISON OF SECTION 9,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
83.870	The 1/4 sec. cor. of secs. 4 and 9.
	<hr/> From the 1/4 sec. cor. of secs. 9 and 10. N. 89°40'30" W., on the E-W center line of sec. 9. Over rolling terrain.
17.40	Ravine, drains SE.
40.108	The center 1/4 sec. cor. of sec. 9.
41.50	Spur, slopes S.
46.00	Ravine, drains SE.
70.00	Little Cedar Creek, 8 lks. wide, course SE.
80.108	Point for the center 80 1/16 sec. cor. of sec. 9.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd.
	$C \frac{1/16}{S \ 9} 80$ 2004
90.00	Spur, slopes SE.
90.644	The 1/4 sec. cor. of sec. 9 only.
	<hr/> SUBDIVISION OF SECTION 10, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA
	<hr/> From the 1/4 sec. cor. of secs. 10 and 15. N. 5°57'40" E., on the N-S center line of sec. 10. Over rolling and broken terrain.
3.40	Ravine, drains SE.
35.00	Ravine, drains SE.
42.767	Point for the center 1/4 sec. cor. of sec. 10, at intersection with the E-W center line.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

SUBDIVISION OF SECTION 10,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p style="text-align: center;">T38N R31E C 1/4 S10</p> <p style="text-align: center;">2001</p> <p>Set a carsonite post, 5 ft. long, alongside the stainless steel post.</p>
60.50	Trail road, 18 lks. wide, bears E. and W.
64.407	Point for the C-N 1/16 sec. cor. of sec. 10.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} C \\ N\ 1/16 \mid S10 \\ C \end{array}$
	2001
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
72.80	Big Cedar Creek, 10 lks. wide, course NE.
79.40	Ravine, drains E.
81.50	Dry creek, 8 lks. wide, drains SE.
86.047	The 1/4 sec. cor. of secs. 3 and 10.
	<hr/> <p>From the 1/4 sec. cor. of secs. 10 and 11.</p> <p>N. 88°15'00" W., on the E-W center line of sec. 10.</p> <p>Over rolling and broken terrain.</p>
19.530	Point for the C-E 1/16 sec. cor. of sec. 10.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	$\begin{array}{c} E\ 1/16 \\ C \frac{\quad}{S10} C \end{array}$
	2001
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
39.060	The center 1/4 sec. cor. of sec. 10.
54.50	Ravine, drains SE.
77.967	The 1/4 sec. cor. of secs. 9 and 10.
	<hr/>

SUBDIVISION OF SECTION 10,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
	From the C-E 1/16 sec. cor. of sec. 10. N. 8°11'40" E., on the N-S center line of the NE1/4 of sec. 10. Over rolling and broken terrain.
21.900	Point for the NE 1/16 sec. cor. of sec. 10, at intersection with the E-W center line of the NE1/4. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. NE 1/16 S10 2001 Set a carsonite post, 5 ft. long, alongside the stainless steel post.
22.90	Trail road, 15 lks. wide, bears NE. and SW.
29.20	Big Cedar Creek, 10 lks. wide, course E.
34.50	Dry creek, 10 lks. wide, drains E.
43.800	The E 1/16 sec. cor. of secs. 3 and 10.
	<hr/> From the N 1/16 sec. cor. of secs. 10 and 11. N. 88°45'20" W., on the E-W center line of the NE1/4 of sec. 10. Over rolling terrain.
20.400	The NE 1/16 sec. cor.
23.80	Trail road, 18 lks. wide, bears NE. and SW.
40.800	The C-N 1/16 sec. cor. of sec. 10.
	<hr/> N. 88°45'20" W., on the E-W center line of the NW1/4 of sec. 10. Over rolling and broken terrain.
31.10	Trail road, 18 lks. wide, bears NW. and SE.
40.722	The N 1/16 sec. cor. of secs. 9 and 10.
	<hr/> SUBDIVISION OF SECTION 27, T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA <hr/>
	From the 1/4 sec. cor. of secs. 27 and 34. N. 1°17'00" E., on the N-S center line of sec. 27. Over rolling and broken terrain.
0.50	Ravine, drains E.

SUBDIVISION OF SECTION 27,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
14.40	Ravine, drains NE.
26.50	Ridge, bears E. and W.
41.619	Point for the center 1/4 sec. cor. of sec. 27, at intersection with the E-W center line. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd. T38N R31E C 1/4 S27 2001 Set a steel fence post, 5 ft. long, alongside the stainless steel post.
48.90	Ravine, drains NE.
61.920	Point for the C-N 1/16 sec. cor. of sec. 27. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, over a plastic-encased magnet, encircled with a collar of stone, with brass cap mkd. C N 1/16 S27 C 2001 Set a steel fence post, 5 ft. long, alongside the stainless steel post.
64.70	Trail road, 18 lks. wide, bears E. and W.
66.20	Bull Creek, 8 lks. wide, course SE.
82.221	The 1/4 sec. cor. of secs. 22 and 27. <hr/> From the 1/4 sec. cor. of secs. 26 and 27. N. 87°47'50" W., on the E-W center line of sec. 27. Over rolling and broken terrain.
41.319	The center 1/4 sec. cor. of sec. 27.
58.20	Ravine, drains NE.
61.977	Point for the C-W 1/16 sec. cor. of sec. 27. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.

SUBDIVISION OF SECTION 27,
T. 38 N., R. 31 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>W 1/16 C ——— C S27 2001</p>
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
82.635	The 1/4 sec. cor. of secs. 27 and 28.
	<hr/> <p>From the C-W 1/16 sec. cor. of sec. 27. N. 1°23'10" E., on the N-S center line of the NW1/4 of sec. 27. Over rolling and broken terrain.</p>
20.409	Point for the NW 1/16 sec. cor. of sec. 27, at intersection with the E-W center line of the NW1/4.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.
	<p>NW 1/16 S27 2001</p>
	Set a carsonite post, 5 ft. long, alongside the stainless steel post.
20.70	Trail road, 18 lks. wide, bears E. and W.
25.40	Bull Creek, 8 lks. wide, course NE.
29.20	Dry channel, drains E.
40.818	The W 1/16 sec. cor. of secs. 22 and 27.
	<hr/> <p>From the C-N 1/16 sec. cor. of sec. 27. N. 87°29'40" W., on the E-W center line of the NW1/4 of sec. 27. Over rolling terrain.</p>
20.622	The NW 1/16 sec. cor.
21.90	Trail road, 18 lks. wide, bears NE. and SW.
41.244	The N 1/16 sec. cor. of secs. 27 and 28.
	<hr/> <p>GENERAL DESCRIPTION</p>
	The lands included in this survey vary from nearly level to mountainous terrain. The elevation ranges from about 4,270 feet above sea level up to about 6,000 feet above sea level. The soil is clay loam. The vegetation consists of sagebrush, rabbitbrush, junipers and native grasses. Access is by Humboldt County Road No. 217 and various unimproved dirt roads.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Ronald E. Williams	Cadastral Surveyor
Clay W. Morrow	Surveying Technician
Sandy C. Bengoa	Engineering Trainee
Jeremiah J. Lee	Survey Aid
Michelle E. Martin	Survey Aid

CERTIFICATE OF SURVEY


We, Thomas E. Casinger and Don R. Aschenbach, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 4th day of June, 2001, and Supplemental Special Instructions bearing the dates of the 27th day of August, 2001, and the 6th day of December, 2002, we have dependently resurveyed portions of the south and north boundaries and a portion of the subdivisional lines, surveyed a portion of the subdivisional lines, and subdivided certain sections, Township 38 North, Range 31 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

JUN 25 2013


(Date)

JUN 19 2013

(Date)

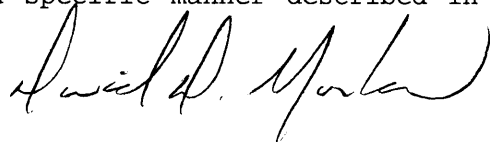

/For Thomas E. Casinger
(Cadastral Surveyor)

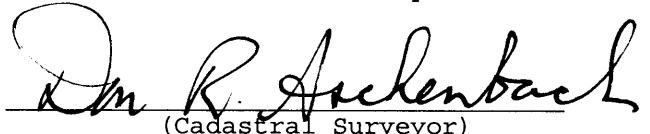

(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of portions of the south and north boundaries and a portion of the subdivisional lines, the survey of a portion of the subdivisional lines, and the subdivision of certain sections, T. 38 N., R. 31 E., Mount Diablo Meridian, Nevada, executed by Thomas E. Casinger and Don R. Aschenbach, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

JUN 25 2013

(Date)

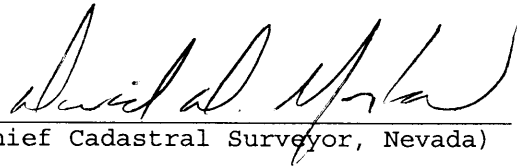

(Chief Cadastral Surveyor, Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 38 N., R. 31 E., M.D.M., Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor, Nevada)~~