

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTION 17,

TOWNSHIP 47 NORTH, RANGE 56 EAST,

OF THE MOUNT DIABLO MERIDIAN, NEVADA

EXECUTED BY

Patrick A. Baumgartner, Cadastral Surveyor

Under special instructions dated and approved July 1, 2016, which provided for the surveys included under Group Number 963, Nevada, and assignment instructions dated July 1, 2016.

Survey commenced: July 5, 2016
Survey completed: August 9, 2016

Township 47 North, Range 56 East, Mount Diablo Meridian, Nevada

FEET	<p>The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of section 17, Township 47 North, Range 56 East, Mount Diablo Meridian, Nevada.</p> <p>History of pertinent surveys:</p> <p>1904: George A. Bellinger surveyed portions of the south and east boundaries, subdivisional lines, and the Retracement of the Idaho-Nevada State Boundary between Mile Post No. 79 and Mile Post Number 92 as shown on the plat approved September 15, 1905.</p> <p>The survey was executed in accordance with the specifications set forth in the <u>Manual of Surveying Instructions, 2009</u>, and the special instructions dated July 1, 2016, for Group Number 963, Nevada.</p> <p>Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Collateral evidence was evaluated and utilized whenever possible. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data were thoroughly verified and only the true line field notes are given herein.</p> <p>The direction and distance measurements taken during the progress of the survey were determined by global navigation satellite system (GNSS) observations, in accordance with Bureau of Land Management standards and guidelines for cadastral surveys using GNSS methods. All reported distances are horizontal ground distances and the direction of all lines are referenced to the true meridian.</p> <p>The geographic coordinates, in NAD83 (2011) (EPOCH: 2010.00), for certain corner positions, determined by GNSS observations, to an accuracy level of less than 0.10 meters, 95 percent confidence circle, relative to the National Geodetic Survey (NGS) Continuous Operating Reference Stations (CORS), using the Online Positioning User Service (OPUS), are listed below.</p> <p>The corner of sections 17, 18, 19, and 20 : Latitude: 41°57'17.927" N. Longitude: 115°41'13.393" W.</p> <p>The corner of sections 4, 5, 8, and 9: Latitude: 41°59'03.190" N. Longitude: 115°40'04.037" W.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of a Portion of the Subdivisional Lines, T. 47 N., R 56 E., Mount Diablo Meridian, Nevada</p> <hr/> <p style="text-align: center;">Restoring the 1904 survey executed by George A. Bellinger</p> <hr/>
------	--

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
1334.4	<hr/> <p>N. 0°54'00" W., beginning new measurement.</p> <p>Point for the N 1/16 sec. cor. of secs. 16 and 17.</p> <p>Set an anchored galvanized iron rod, 12 ins. long, 5/8 in. diam., 8 ins. in drill hole in solid rock, in a mound of stone, 2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T47N R56E N 1/16 S17 S16 2016</p> </div> <p>Set a steel fence post, with an attached Land Survey Monument sign, 3 ft. N. of cor.</p> <p>The cor. is located on a steep rocky W. slope amid grass and sagebrush.</p>
2001.6	<p>Point for the N-N 1/64 sec. cor. of secs. 16 and 17. Point not monumented.</p>
2668.8	<p>Point for the cor. of secs. 8, 9, 16 and 17, at proportionate dist. There is no remaining evidence of the orig. cor.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, over plastic-coated magnet, with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T47N R56E S8 S9 ----- S17 S16 2016</p> </div> <p>Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.</p> <p>The cor. is located on a steep rocky SW slope amid sparse grass and sagebrush.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 9 and 16, monumented with the original lava stone, 18x10x6 ins., firmly set, projecting 5 ins. above the ground, mkd. 1/4 on N. face, witnessed by an embedded mound of stone, 2 ft. diam. base, 1 ft. high, N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over plastic-coated magnet, witnessed by a mound of stone, 2 ft. diam. base, 1 ft. high, W. of cor., with aluminum cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p style="text-align: center;">T47N R56E S 9 1/4 ——— S 16 2016</p> <p>Deposit the original stone, inverted, alongside the cor.</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along S. side of cor.</p> <p>The cor. is located along the N. side of a steel fence post, on a mostly flat rolling plateau amid grass.</p> <p>N. 89°10'48" W., bet. secs. 9 and 16.</p>
2627.5	<p>The cor. of secs. 8, 9, 16, and 17.</p> <hr/>
	<p>N. 0°14'18" W., bet. secs. 8 and 9.</p>
2668.4	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist. There is no remaining evidence of the orig. cor. Point not monumented.</p>
3160.0	<p>Bruneau River, 40 ft. wide, course NE.</p>
5336.8	<p>The cor. of secs. 4, 5, 8, and 9, monumented with the original lava stone, 32x14x5 ins., firmly set, projecting 20 ins. above the ground, mkd. with 5 notches on the S. edge and 4 notches on the E. edge, with remnants of the scattered orig. witness mound of stone, W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, over plastic-coated magnet, with aluminum cap mkd.</p>
	<p style="text-align: center;">T47N R56E S5 S4 ——— S8 S9 2016</p> <p>Deposit the original stone, inverted, alongside the cor.</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p>The cor. is located on a steep rocky S. slope amid sparse grass and sagebrush.</p> <hr/>
	<p>From the cor. of secs. 16, 17, 20, and 21.</p>
	<p>N. 89°58'30" W., bet. secs. 17 and 20.</p>
2030.0	<p>Bruneau River, 40 ft. wide, course N.</p>
2270.0	<p>Rowland Road, 20 ft. wide, course SE and NW.</p>
2643.6	<p>The 1/4 sec. cor. of secs. 17 and 20, perpetuated by Mark C. Boge, Nevada PLS No. 6196, in 1991, monumented with a rebar, 3/4 in. diam., firmly set, projecting 3 ins. above the ground, in a collar of stone, 2 ft. diam. base, 1/2 ft. high, with an aluminum cap mkd. PLS 6196, and witnessed by a steel fence post alongside the W. side of the cor., as noted on Instrument No. 301671, recorded in the Elko County Courthouse, Elko, Nevada. Note: The orig. stone, 15x10x8 ins., mkd. 1/4, was found lying loose along the S. side of rebar, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, N. of cor. This is accepted as a careful and faithful perpetuation of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over plastic-coated magnet, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, N. of cor., with aluminum cap mkd.</p> <div style="text-align: center;"> <p>T47N R56E S 17 1/4 ——— S 20 2016</p> </div> <p>Deposit the rebar, 30 ins. long, inverted, inside the aluminum post and deposit the original stone, inverted, alongside the cor.</p> <p>Attached a Land Survey Monument sign to the steel fence post.</p>
	<p>The cor. is located on a N. slope amid grass and sparse sagebrush.</p> <hr/> <p>N. 89°58'54" W., beginning new measurement.</p>
2640.5	<p>The cor. of secs. 17, 18, 19, and 20, monumented with the original lava stone, 22x10x5 ins., firmly set, projecting 17 ins. above the ground, in a collar of stone, 2 1/2 ft. diam. base, 1 ft. high, mkd. with 3 notches on the S. edge and 5 notches on the E. edge, witnessed by a mound of stone, 2 ft. diam. base, 1 1/2 ft. high, W. of cor.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET											
	<p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, 2 ft. diam. base, 1/2 ft. high, over plastic-coated magnet, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 1/2 ft. high, W. of cor., with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T47N R56E</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td colspan="2">2016</td> </tr> </table> </div> <p>Deposit the original stone, inverted, alongside the cor.</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along S. side of cor.</p> <p>The cor. is located on a N. slope amid grass, rock, and sagebrush.</p> <hr/> <p>N. 0°02'54" W., bet. secs. 17 and 18.</p>	T47N R56E		S18	S17	<hr/>		S19	S20	2016	
T47N R56E											
S18	S17										
<hr/>											
S19	S20										
2016											
950.0	<p>Rowland Road, 20 ft. wide, bears SE and NW.</p>										
2620.9	<p>The 1/4 sec. cor. of secs. 17 and 18, monumented with the original lava stone, 22x12x4 ins., laying on E. face in original socket, mkd. 1/4 on W. face, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, over plastic-coated magnet, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, W. of cor., with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T47N R56E</td> </tr> <tr> <td colspan="2">1/4</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2">2016</td> </tr> </table> </div> <p>Deposit the original stone, inverted, alongside the cor.</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.</p> <p>The cor. is located on a steep E. slope amid grass, rock, and sagebrush.</p> <hr/>	T47N R56E		1/4		S18	S17	2016			
T47N R56E											
1/4											
S18	S17										
2016											

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET											
2718.0	<p>N. 0°19'24" W., beginning new measurement.</p> <p>The cor. of secs. 7, 8, 17, and 18, monumented with the original lava stone, 24x10x5 ins., firmly set, projecting 10 ins. above the ground, mkd. with 4 notches on the S. edge and 5 notches on the E. edge, witnessed by a mound of stone, 2 ft. diam. base, 1 1/2 ft. high, W. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, 1 1/2 ft. diam. base, 1/2 ft. high, over plastic-coated magnet, witnessed by a mound of stone, 2 ft. diam. base, 1 1/2 ft. high, W. of cor., with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T47N R56E</td> </tr> <tr> <td>S7</td> <td>S8</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2">2016</td> </tr> </table> </div> <p>Deposit the original stone, inverted, alongside the cor.</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along S. side of cor.</p> <p>The cor. is located on mostly flat rolling plateau amid grass, rock, and sagebrush.</p> <hr/> <p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>N. 89°43'42" W., bet. secs. 8 and 17.</p>	T47N R56E		S7	S8	<hr/>		S18	S17	2016	
T47N R56E											
S7	S8										
<hr/>											
S18	S17										
2016											
657.2	Point for the E-E 1/64 sec. cor. of secs. 8 and 17. Point not monumented.										
985.8	<p>Point for the W-E-E 1/256 sec. cor. of secs. 8 and 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 20 ins. in the ground, in a collar of stone, 1 1/2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T47N R56E</td> </tr> <tr> <td colspan="2">S8</td> </tr> <tr> <td colspan="2">W-E-E 1/256</td> </tr> <tr> <td colspan="2">S17</td> </tr> <tr> <td colspan="2">2016</td> </tr> </table> </div> <p>Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.</p> <p>The cor. is located on a rocky W. slope amid sparse grass and sagebrush.</p>	T47N R56E		S8		W-E-E 1/256		S17		2016	
T47N R56E											
S8											
W-E-E 1/256											
S17											
2016											

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
1314.4	<p>Point for the E 1/16 sec. cor. of secs. 8 and 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 21 ins. in the ground, in a collar of stone, 1 1/2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S 8 E 1/16 ——— S 17 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.</p> <p>The cor. is located on mostly flat land amid pasture grass.</p>
1460.0	<p>Bruneau River, 40 ft. wide, course N. and S.</p>
1643.0	<p>Point for the E-W-E 1/256 sec. cor. of secs. 8 and 17. Point not monumented.</p>
1971.6	<p>Point for the W-E 1/64 sec. cor. of secs. 8 and 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 20 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S8 W-E 1/64 S17 2016</p> <p>The cor. is located on a steep E. slope amid grass, rock, and sagebrush.</p>
2628.8	<p>The 1/4 sec. cor. of secs. 8 and 17, monumented with the original lava stone, 28x12x6 ins., firmly set, projecting 18 ins., mkd. 1/4 on N. face, witnessed by an embedded mound of stone, 2 1/2 ft. diam. base, N. of cor.</p> <p>At the cor. point</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over plastic-coated magnet, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 1/2 ft. high, N. of cor., with aluminum cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	T47N R56E S 8 1/4 ——— S 17 2016
	Deposit the original stone, inverted, alongside the cor. Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor. The cor. is located on a steep rocky E. slope amid grass and sagebrush.
	<hr/> N. 89°53'36" W., beginning new measurement.
2651.9	The cor. of secs. 7, 8, 17, and 18. <hr/> <div style="text-align: center;"> Subdivision of Section 17, T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada </div> <hr/>
	From the 1/4 sec. cor. of secs. 17 and 20. N. 0°03'30" W., on the N. and S. center line of sec. 17.
680.0	Rowland Road, 20 ft. wide, bears E. and W.
2637.7	Point for the C 1/4 sec. cor. of sec. 17, at the intersection with the E. and W. center line. Point not monumented.
3986.3	Point for the C-N 1/16 sec. cor. of sec. 17. Point not monumented.
4660.6	Point for the C-N-N 1/64 sec. cor. of sec. 17. Point not monumented.
5334.9	The 1/4 sec. cor. of secs. 8 and 17. <hr/> From the 1/4 sec. cor. of secs. 16 and 17. S. 89°39'12" W., on the E. and W. center line of sec. 17.
333.5	Point for the C-E-E-E 1/256 sec. cor. of sec. 17. Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 18 ins. in the ground, in a collar of stone, 2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p style="text-align: center;">T47N R56E S17 C-E-E-E 1/256 2016</p> <p>The cor. is located on a gentle W. slope amid grass and sagebrush, in a fence, bears S. 70° E. and N. 70° W.</p>
500.0	Road, dirt surface, 20 ft. wide, bears NE and SW.
580.0	Bruneau River, 40 ft. wide, course NE.
670.0	Bruneau River, 40 ft. wide, course SE.
1090.0	Bruneau River, 40 ft. wide, course N.
1334.0	<p>Point for the C-E 1/16 sec. cor. of sec. 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 10 ins. in drill hole in solid rock, in a mound of stone, 2 1/2 ft. diam. base, 1 ft. high, witnessed by a mound of stone, 2 1/2 ft. diam. base, 1 1/2 ft. high, W. of cor., with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E E 1/16 C ——— C S 17 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.</p> <p>The cor. is located on a steep rocky E. slope amid grass and sagebrush.</p>
2668.0	The point for the C 1/4 sec. cor. of sec. 17.
5307.7	The 1/4 sec. cor. of secs. 17 and 18.
	<hr/> <p>From the C-E 1/16 sec. cor. of sec. 17.</p> <p>N. 0°28'36" W., on the N. and S. center line of the NE1/4 of sec. 17.</p>
1341.4	<p>Point for the NE 1/16 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the NE1/4.</p> <p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-coated magnet, with aluminum cap mkd.</p>

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p style="text-align: center;">T47N R56E NE 1/16 S 17 2016</p>
	<p>Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.</p>
	<p>The cor. is located on an E. slope amid grass, rock, and sagebrush.</p>
2012.0	<p>Point for the C-N-NE 1/64 sec. cor. of sec. 17.</p>
	<p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 20 ins. in the ground, with aluminum cap mkd.</p>
	<p style="text-align: center;">T47N R56E S17 C-N-NE 1/64 2016</p>
	<p>Set a steel fence post, with an attached Land Survey Monument sign, along E. side of cor.</p>
	<p>The cor. is located on a steep N. slope amid grass, rock, and sagebrush.</p>
2347.3	<p>Point for the C-N-N-NE 1/256 sec. cor. of sec. 17. Point not monumented.</p>
2360.0	<p>Bruneau River, 40 ft. wide, course NW.</p>
2682.6	<p>The E 1/16 sec. cor. of secs. 8 and 17.</p> <hr/>
	<p>From the N 1/16 sec. cor. of secs. 16 and 17.</p>
	<p>S. 89°57'36" W., on the E. and W. center line of the NE1/4 of sec. 17.</p>
170.0	<p>Road, dirt surface, 20 ft. wide, bears N. and S.</p>
331.0	<p>Point for the C-E-E-NE 1/256 sec. cor. of sec. 17.</p>
	<p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, in a collar of stone, 2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.</p>

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	T47N R56E S17 C-E-E-NE 1/256 2016
	Set a steel fence post, with an attached Land Survey Monument sign, along E. side of cor.
	The cor. is located on mostly flat land amid pasture grass and willows, 30 ft. S. of the E. bank of Bruneau River.
390.0	Bruneau River, 40 ft. wide, course NE.
662.0	Point for the C-E-NE 1/64 sec. cor. of sec. 17. Point not monumented.
1324.0	The NE 1/16 sec. cor. of sec. 17.
1986.1	Point for the C-W-NE 1/64 sec. cor. of sec. 17. Point not monumented.
2648.2	The point for the C-N 1/16 sec. cor. of sec. 17.
	<hr/> From the point for the C-E-NE 1/64 sec. cor. of sec. 17.
	N. 0°41'18" W., on the N. and S. center line of the NE1/4 of the NE1/4 of sec. 17.
668.9	Point for the NE-NE 1/64 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the NE1/4 of the NE1/4.
	Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., flush with the surface of the ground, in an embedded collar of stone, 2 ft. diam. base, with aluminum cap mkd.
	T47N R56E S17 NE-NE 1/64 2016
	Set a steel fence post, with an attached Land Survey Monument sign, along W. side of cor.
	The cor. is located on mostly flat land amid pasture grass and willows, 50 ft. S. of the W. bank of Bruneau River.
762.0	Bruneau River, 40 ft. wide, course NW.
1003.4	Point for the C-N-NE-NE 1/256 sec. cor. of sec. 17.

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., flush with the surface of the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S17 C-N-NE-NE 1/256 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along E. side of cor.</p> <p>The cor. is located on a steep rocky SW slope amid sparse grass and sagebrush.</p>
1337.9	<p>The point for the E-E 1/64 sec. cor. of secs. 8 and 17.</p> <hr/>
	<p>From the point for the N-N 1/64 sec. cor. of secs. 16 and 17.</p> <p>N. 89°53'00" W., on the E. and W. center line of the NE1/4 of the NE1/4 of sec. 17.</p>
329.8	<p>Point for the C-E-NE-NE 1/256 sec. cor. of sec. 17.</p>
	<p>Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, in a mound of stone, 3 ft. diam. base, 2 1/2 ft. high, over plastic-coated magnet, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S17 C-E-NE-NE 1/256 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.</p> <p>The cor. is located on a steep rocky SW slope.</p>
499.0	<p>Bruneau River, 40 ft. wide, course NW.</p>
659.6	<p>The NE-NE 1/64 sec. cor. of sec. 17.</p>
989.4	<p>Point for the C-W-NE-NE 1/256 sec. cor. of sec. 17. Point not monumented.</p>
1319.2	<p>The C-N-NE 1/64 sec. cor. of sec. 17.</p> <hr/>

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	<p>From the point for the C-E-E-NE 1/256 sec. cor. of sec. 17.</p> <p>N. 0°47'36" W., on the N. and S. center line of the SE1/4 of the NE1/4 of the NE1/4 of sec. 17.</p>
50.0	Bruneau River, 40 ft. wide, course NE.
340.0	Bruneau River, 40 ft. wide, course NW.
450.0	Road, dirt surface, 20 ft. wide, bears SE and NW.
668.0	<p>The C-E-NE-NE 1/256 sec. cor. of sec. 17.</p> <hr/>
	<p>From the point for the C-W-NE-NE 1/256 sec. cor. of sec. 17.</p> <p>N. 0°34'54" W., on the N. and S. center line of the NW1/4 of the NE1/4 of the NE1/4 of sec. 17.</p>
240.0	Bruneau River, 40 ft. wide, course NW.
334.9	<p>Point for the NW-NE-NE 1/256 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the NW1/4 of the NE1/4 of the NE1/4.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 21 ins. in the ground, in a collar of stone, 2 ft. diam. base, 1/2 ft. high, with aluminum cap mkd.</p>
	<p style="text-align: center;">T47N R56E S17 NW-NE-NE 1/256 2016</p>
	<p>Set a steel fence post with an attached Land Survey Monument sign S. of cor.</p> <p>The cor. is located on mostly flat land amid pasture grass and willows, 70 ft. N. of the E. bank of Bruneau River and 30 ft. W. of a two-track road in pasture.</p>
669.8	<p>The W-E-E 1/256 sec. cor. of secs. 8 and 17.</p> <hr/>
	<p>From the C-N-NE-NE 1/256 sec. cor. of sec. 17.</p> <p>N. 89°48'24" W., on the E. and W. center line of the NW1/4 of the NE1/4 of the NE1/4 of sec. 17.</p>
329.2	The NW-NE-NE 1/256 sec. cor. of sec. 17.

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
650.0	Bruneau River, 40 ft. wide, course NE.
658.4	<p>The point for the C-N-N-NE 1/256 sec. cor. of sec. 17.</p> <hr/> <p>From the point for the C-W-NE 1/64 sec. cor. of sec. 17.</p> <p>N. 0°16'00" W., on the N. and S. center line of the NW1/4 of the NE1/4 of sec. 17.</p>
672.5	Point for the NW-NE 1/64 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the NW1/4 of the NE1/4. Point not monumented.
1008.7	<p>Point for the C-N-NW-NE 1/256 sec. cor. of sec. 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S17 C-N-NW-NE 1/256 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.</p> <p>The cor. is located on a steep E. slope amid grass, rock, and sagebrush.</p>
1344.9	<p>The W-E 1/64 sec. cor. of secs. 8 and 17.</p> <hr/> <p>From the C-N-NE 1/64 sec. cor. of sec. 17.</p> <p>N. 89°53'00" W., on the E. and W. center line of the NW1/4 of the NE1/4 of sec. 17.</p>
329.8	<p>Point for the C-E-NW-NE 1/256 sec. cor. of sec. 17.</p> <p>Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 22 ins. in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T47N R56E S17 C-E-NW-NE 1/256 2016</p> <p>Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.</p>

Subdivision of Section 17,
T. 47 N., R. 56 E., Mount Diablo Meridian, Nevada

FEET	
	The cor. is located on an E. slope amid grass and sagebrush.
659.6	The point for the NW-NE 1/64 sec. cor. of sec. 17.
1319.2	The point for the C-N-N 1/64 sec. cor. of sec. 17.
	<hr/>
	From the C-E-NW-NE 1/256 sec. cor. of sec. 17.
	N. 0°22'18" W., on the N. and S. center line of the NE1/4 of the NW1/4 of the NE1/4 of sec. 17.
335.8	Point for the NE-NW-NE 1/256 sec. cor. of sec. 17, at the intersection with the E. and W. center line of the NE1/4 of the NW1/4 of the NE1/4.
	Set an anchored galvanized iron rod, 24 ins. long, 5/8 in. diam., 20 ins. in the ground, with aluminum cap mkd.
	T47N R56E
	S17
	NE-NW-NE
	1/256
	2016
	Set a steel fence post, with an attached Land Survey Monument sign, along N. side of cor.
	The cor. is located on a steep NE slope amid grass, rock, and sagebrush.
671.6	The point for the E-W-E 1/256 sec. cor. of secs. 8 and 17.
	<hr/>
	From the point for the C-N-N-NE 1/256 sec. cor. of sec. 17.
	N. 89°48'24" W., on the E. and W. center line of the NE1/4 of the NW1/4 of the NE1/4 of sec. 17.
329.2	The NE-NW-NE 1/256 sec. cor. of sec. 17.
658.4	The C-N-NW-NE 1/256 sec. cor. of sec. 17.
	<hr/>
	GENERAL DESCRIPTION
	The lands contained within the scope of this survey are located in Elko County, Nevada, in an area generally called Rowland with no known inhabitants.

Township 47 North, Range 56 East, Mount Diablo Meridian, Nevada


<p>F E E T</p>	<p>The area is mountainous throughout with elevations ranging from 6,000 feet on the high plateaus, with vegetation consisting mostly of sagebrush and grasses, to the valley bottoms at 4,800 feet, with vegetation consisting of willow and pasture grass along the Bruneau River. The area is drained by the Bruneau River which generally flows northerly through section 17 into Idaho.</p> <p>Access is provided by Rowland Road (NF-037 in Nevada), by a dirt road accessing from the north by way of Idaho State Highway No. 51 and by Nevada State Highway No. 225 from the south.</p> <p>The use of the land is for agriculture and recreation.</p> <p>No mineral formations of any consequence were noted during the course of this survey.</p>
----------------	--

CERTIFICATE OF SURVEY

I, Patrick A. Baumgartner, Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of special instructions bearing date of the 1st day of July, 2016, I have dependently resurveyed a portion of the subdivisional lines, and subdivided section 17, Township 47 North, Range 56 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

MAY 26 2017

Date

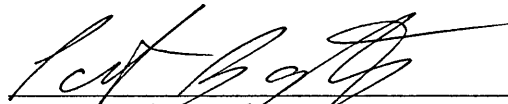

Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of section 17, Township 47 North, Range 56 East, of the Mount Diablo Meridian, in the State of Nevada, executed by Patrick A. Baumgartner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

MAY 26 2017

Date

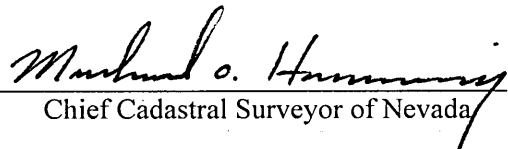
Chief Cadastral Surveyor of Nevada

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above described surveys in Township 47 North, Range 56 East, of the Mount Diablo Meridian, Nevada, is a true copy of the original field notes.

Date

Chief Cadastral Surveyor for Nevada