

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTION 5,  
TOWNSHIP 7 SOUTH, RANGE 61 EAST,  
OF THE MOUNT DIABLO MERIDIAN,  
IN THE STATE OF NEVADA

EXECUTED BY

Jose A. Serna, Cadastral Surveyor

Under Special Instructions dated June 30, 2014,  
and approved June 30, 2014,  
which provided for the surveys included under Group No. 934,  
and Assignment Instructions dated June 30, 2014.

Survey commenced July 17, 2014

Survey completed April 3, 2015

INDEX DIAGRAM

TOWNSHIP 7 SOUTH, RANGE 61 EAST, MOUNT DIABLO MERIDIAN, NEVADA

6	5 2	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Subdivision of Section 5 ..... pp. 4-9

## TOWNSHIP 7 SOUTH, RANGE 61 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of section 5, Township 7 South, Range 61 East, of the Mount Diablo Meridian, Nevada.</p> <p>The exterior boundaries and subdivisional lines were surveyed by U.S. Deputy Surveyor E.B. Monroe in 1870 under Contract No. 34.</p> <p>The east boundary was dependently resurveyed by Cadastral Engineers D.R. Averill and E.A. Taylor in 1952-53 under Group No. 355.</p> <p>A portion of the north boundary was dependently resurveyed by Cadastral Engineers D.R. Averill and R.F. Wilson, in 1953 under Group No. 355.</p> <p>A portion of the subdivisional lines were dependently resurveyed, section 8 was subdivided, and a metes-and-bounds survey of the centerline of the right-of-way of U.S. Highway No. 93, through section 9 and a portion of section 8 was executed by Cadastral Surveyor S.A. Burkhardt in 2007 under Group No. 851.</p> <p>A portion of the south boundary and a portion of the subdivisional lines were dependently resurveyed, sections 27, 34 and 35 were subdivided, and metes-and-bounds surveys of certain parcel boundaries through portions of sections 27 and 34 were executed by Cadastral Surveyor K.M. Hellebust in 2010-11 under Group No. 893.</p> <p>A portion of the north boundary was dependently resurveyed by Cadastral Surveyor M.E. Swope, in 2013-15, under Group No. 925.</p> <p>Before restoring the corners, the lines of the original surveys were retraced and a diligent search made for any evidence of the original corners and other calls of the original field note record.</p> <p>In order to simplify the record, the true line notes only are supplied herewith, which refer to the completed survey.</p> <p>The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 934, dated June 30, 2014.</p> <p>Measurements were made with Trimble R8-3 Global Positioning System (GPS) receivers using the real-time kinematic (RTK) method. The direction of each line is with reference to the true meridian and are reported as mean bearings. The distances are reported as horizontal measurement at a mean ground elevation of 3,500 feet above sea level.</p> <p>The NAD83 (2011), (EPOCH:2010:0000) geographic positions, for the corners below were determined by GPS static observations processed by the National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuous Operating Reference Stations (CORS) NVPI PIOCHE CORS ARP, NVTP TROPICANA CORS ARP, NVCA CARLTON SQUARE 2 CORS ARP, NVWS WARM SPRINGS CORS ARP and carried forward by RTK observations.</p>
--------	--

## TOWNSHIP 7 SOUTH, RANGE 61 EAST, MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>The cor. of secs. 4, 5, 8 and 9, is as follows:</p> <p style="padding-left: 40px;">Latitude: 37°21'42.564" N. Longitude: 115°09'19.579" W.</p> <p>The 1/4 sec. cor. of secs. 5 and 6, is as follows:</p> <p style="padding-left: 40px;">Latitude: 37°22'10.377" N. Longitude: 115°10'24.997" W.</p> <p>The July 17, 2014 mean magnetic declination was determined to be 12°13' E., as obtained from the National Oceanic and Atmospheric Administration's National Geophysical Data Center declination calculator.</p> <hr/> <p style="text-align: center;">DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p style="text-align: center;">Reestablishment of a Portion of the Survey Executed by U.S. Deputy Surveyor E.B. Monroe in 1870</p> <hr/> <p>Beginning at the cor. of secs. 4, 5, 8 and 9, monumented with a stone, 19x10x5 ins., mkd. with an "x", at the top of a stone cairn, 4 1/2 ft. high, 2 1/2 ft. diam., in a wire basket, as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>from which the 2007 reference monuments</p> <p style="padding-left: 40px;">A stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, in a collar of stone, bears S. 45°23' E., 9.2 lks. dist., with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p style="padding-left: 40px;">A stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above a mound of stone, 3 ft. base, 5 ins. high, bears S. 45°18' W., 9.2 lks. dist., with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>Cor. is located at the intersection of fences, 4 strand barbed wire, extending N. and W.</p> <p>N. 0°15'10" E., bet. secs. 4 and 5.</p> <p>Over gently rolling land, through creosote and scattered cacti.</p> <p>4.60 From this point, a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground and in a collar of stone, with aluminum cap mkd. L.SMITH CONTROL POINT WATER PLS 12751, bears EAST, 0.186 chs. dist. Not utilized in the course of this survey.</p> <p>11.80 Dry wash, 53 lks. wide, 3 ft. deep, drains SW.</p> <p>19.70 Dry wash, 38 lks. wide, 3 ft. deep, drains SW.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS 20.674	<p>The S 1/16 sec. cor. of secs. 4 and 5, determined at the center of a stone cairn, 3 1/2 ft. high, 2 1/2 ft. diam., in a wire basket. This stone cairn occupies the position determined by Frank Hulse, Nevada Professional Land Surveyor No. 6498, in 1997, as recorded in Lincoln County, Nevada, Plat Book B, Page 48, Document No. 10951, and is accepted as a careful and faithful determination of the position of the corner.</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, over a plastic encased magnet, and in a collar of stone, for a reference monument, bears N. 0°11' E., 29.4 lks. dist., with brass cap mkd. RM T7S R61E S5 S4 19.4 FT. TO COR. 2014 and an arrow pointing to the cor.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, over a plastic encased magnet, and in a collar of stone, for a reference monument, bears S. 89°37' E., 30.5 lks. dist., with brass cap mkd. RM T7S R61E S4 20.1 FT. TO COR. 2014 and an arrow pointing to the cor.</p> <hr/> <p>N. 0°15'10" E., beginning new measurement.</p> <p>Continue over gently rolling land, through creosote and scattered cacti.</p>
1.00	From this point, a wooden post, 7 x 2 1/2 ins., firmly set, projecting 33 ins. above the ground, bears WEST, 0.081 chs. dist. Not utilized in the course of this survey.
4.00	From this point, a wooden hub, 1 1/2 x 1 1/2 ins., firmly set, projecting 2 ins. above the ground, with a wooden post, 7 x 2 1/2 ins., firmly set, projecting 40 ins. above the ground, set alongside, bears WEST, 0.097 chs. dist. Not utilized in the course of this survey.
4.10	Top of ascent.
10.337	<p>Point for the N-S 1/64 sec. cor. of secs. 4 and 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a plastic-encased magnet, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">N-S 1/64 S 5   S 4  2014</p>
16.70	Broad wash, 4 chs. wide, drains W.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 20.674</p>	<p>The 1/4 sec. cor. of secs. 4 and 5, perpetuated by R.L. Hafen, Nevada Professional Land Surveyor No. 4428, monumented with an unrecorded rebar, 1/2 in. diam., firmly set, projecting 1 in. above the ground, in a mound of stone, 2 1/2 ft. base, 10 ins. high, with an aluminum cap, 2 ins. diam., mkd. R. L. HAFEN PLS 4428, with a trachyte stone, 17x10x6 ins. (record, 14x12x8 ins.), loosely set alongside, mkd. 1/4 on W. face. This is accepted as a careful and faithful perpetuation of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T7S R61E 1/4 S 5   S 4</p> <p style="text-align: center;">2015</p> <p>Insert the rebar inside the stainless steel post and bury the mkd. stone alongside.</p> <p>From this cor., a cor. of barbed wire fences bears N., 2 lks. dist., with fences extending N. and W.</p> <hr/> <p style="text-align: center;">SUBDIVISION OF SECTION 5, T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/> <p>From the 1/4 sec. cor. of secs. 5 and 8, monumented with a PK magnetic nail, firmly set in a divot in the pavement, 1/2 in. below the surface. Cor. is located in the asphalt surfaced parking lot of Pahranaagat High School, as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>from which</p> <p style="padding-left: 40px;">The SW. cor. of a cinder block building, 13 ft. high, bears S. 17°16' E., 29.8 lks. dist.</p> <p style="padding-left: 40px;">An "x", 2x2 ins., mkd. on a horizontal cement step, bears N. 76°16' W., 84.2 lks. dist.</p> <p style="padding-left: 40px;">An "x", 2x2 ins., mkd. on a horizontal cement pad, bears N. 3°25' W., 19.6 lks. dist.</p> <p>N. 0°17'20" E., on the N-S center line of sec. 5.</p> <p>Through a portion of the Alamo Townsite, Lincoln County, Nevada.</p> <p>20.551 Point for the C-S 1/16 sec. cor. of sec. 5.</p> <p>POINT NOT MONUMENTED</p>
--------------------------	---

SUBDIVISION OF SECTION 5,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

<p>CHAINS 41.102</p>	<p>Point for the center 1/4 sec. cor. of sec. 5, determined by the method of miscellaneous control from recorded ties by Lenard D. Smith, Nevada Professional Land Surveyor No. 12751, as recorded in Lincoln County, Nevada, Parcel Map, Plat Book C, Page 318, Document No. 0128441, and Parcel Map, Plat Book C, Page 476, Document No. 0133948; there is no remaining evidence of the corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">T7S R61E C 1/4 S 5</p> <p style="text-align: center;">2014</p> <p>Cor. is located 2 lks. N. of the southerly edge of a concrete irrigation ditch, 56 ins. wide, 22 ins. deep.</p> <p>From this point, the 1/4 sec. cor. of secs. 5 and 32, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the S. bdy. of T. 6 S., R. 61 E., executed under Group No. 925, bears N. 2°00'50" E., 40.460 chs. dist.</p> <p>From this same point, a position established by Lenard D. Smith, Nevada Professional Land Surveyor No. 12751, in 2009, bears S. 89°03'10" E., 0.355 chs. dist., monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 1/2 ins. above the ground, with an orange plastic cap, 1 1/4 ins. diam., mkd. L. SMITH PLS 12751, as recorded in Lincoln County Nevada, Plat Book C, Page 476, Document No. 133948.</p> <p>From this same point, a position established by Neil L. Rhodes, Nevada Professional Land Surveyor No. 8625, in 2004, bears S. 0°15'00" W., 4.77 chs. dist., monumented with a rebar, 1/2 in. diam., firmly set, projecting 10 ins. above the ground, with a yellow plastic cap, 1 in. diam., mkd. BBE INC. PLS 8625, as recorded in Lincoln County Nevada, Plat Book C, Page 50, Document No. 122383, with a fence post, firmly set, projecting 62 ins. above the ground, set alongside.</p> <p>From this same point, a position established by Lenard D. Smith, Nevada Professional Land Surveyor No. 12751, in 2009, bears N. 89°05'50" W., 13.000 chs. dist., monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an orange plastic cap, 1 1/4 ins. diam., mkd. L. SMITH PLS 12751, as recorded in Lincoln County Nevada, Plat Book C, Page 473, Document No. 133947.</p> <p>From this same point, a position established by Lenard D. Smith, Nevada Professional Land Surveyor No. 12751, in 2009, bears N. 76°08'00" W., 20.621 chs. dist., monumented with a rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with an orange plastic cap, 1 1/4 ins. diam., mkd. L. SMITH PLS</p>
--------------------------	---

SUBDIVISION OF SECTION 5,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	12751, as recorded in Lincoln County Nevada, Plat Book C, Page 473, Document No. 133947.
	<p>From the 1/4 sec. cor. of secs. 4 and 5.</p> <p>N. 89°04'10" W., on the E-W center line of sec. 5.</p> <p>Over a SSE. slope, through creosote and scattered cacti.</p>
7.70	From this point, a wooden post, 4x4 ins., firmly set, projecting 54 ins. above the ground, bears SOUTH, 0.066 chs. dist. Not utilized in the course of this survey.
9.60	From this point, a rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with an aluminum cap mkd NEW HWY, with a fence post, firmly set, projecting 30 ins. above the ground, set alongside rebar, bears NORTH, 0.012 chs. dist. Not utilized in the course of this survey.
12.80	The corner of chain-link fences, 5 ft. high, with fences extending N. and W., around the perimeter of a NDOT facility.
18.90	The corner of chain-link fences, 5 ft. high, with fences extending N. and E., around the perimeter of a NDOT facility.
20.00	U.S. Highway No. 93, center of asphalt surface, 42 lks. wide, bears N. and S.
20.056	<p>Point for the C-E 1/16 sec. cor. of sec. 5.</p> <p>Set a magnetic nail, 1 in. long, flush with asphalt surface of U.S. Highway No. 93, 7 lks. E. of the westerly edge of the pavement.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 31 ins. in the ground, over a plastic encased magnet, for a reference monument, bears S. 46°18' E., 77.1 lks. dist., with brass cap mkd. RM T7S R61E S5 50.9 FT. TO COR. 2014 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 32 ins. in the ground, over a plastic encased magnet, for a reference monument, bears S. 31°01' W., 60.6 lks. dist., with brass cap mkd. RM T7S R61E S5 40.0 FT. TO COR. 2014 and an arrow pointing to the cor.</p>
40.112	<p>The center 1/4 sec. cor. of sec. 5.</p> <hr style="width: 30%; margin-left: 0;"/> <p>N. 89°06'00" W., beginning new measurement.</p> <p>Through a portion of the Alamo Townsite, Lincoln County, Nevada.</p>
20.053	The C-W 1/16 sec. cor. of sec. 5, monumented with a rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground and in a collar of stone, with aluminum cap mkd. RL HAFEN RLS 4428, as recorded in Lincoln County, Nevada, Parcel Map, Book Plat B,



SUBDIVISION OF SECTION 5,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>Page 354, Document No. 115818. This is accepted as a careful and faithful determination of the position of the corner.</p>
	<p>N. 89°06'00" W., beginning new measurement.</p>
10.047	<p>Center of Park Lane, asphalt surfaced, 38 lks. wide, bears N. 0°37' E. and S. 0°37' W.</p>
20.053	<p>The 1/4 sec. cor. of secs. 5 and 6, monumented with a rebar, 1/2 in. diam., firmly set in a concrete form and in a mound of earth, with a brass cap, 2 ins. diam., mkd. T7S R61E M.D.B.M. 6   5 RLS 3644, lying loose alongside rebar, with a fence post, firmly set, projecting 51 ins. above the ground, set alongside, with 4 scattered stones around the fence post and rebar, no visible markings found on stones. This corner has been adopted by adjacent land owners and professional land surveyors, and is accepted as the best available evidence of the position of the original corner.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R61E 1/4 S 6   S 5</p> <p>2015</p> </div> <p>Insert rebar inside the stainless steel post and set the fence post alongside.</p>
	<p>From the E 1/16 sec. cor. of secs. 5 and 8, monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, 3 ins. below the ground, with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>from which the 2007 reference monuments</p> <p>A stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, bears N. 73°08' E., 50.7 lks. dist., with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>A stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, bears S. 44°54' E., 58.2 lks. dist., with brass cap mkd. as described in the field notes of the dependent resurvey of a portion of the subdivisional lines, T. 7 S., R. 61 E., executed under Group No. 851.</p> <p>Cor. is located in a gravel parking area S. of a house, and N. of a work shop.</p>

SUBDIVISION OF SECTION 5,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	<p>N. 0°16'10" E., on the N-S center line of the SE1/4 of sec. 5.</p> <p>Through a portion of the Alamo Townsite, Lincoln County, Nevada.</p>
20.613	<p>Point for the SE 1/16 sec. cor. of sec. 5, at the intersection with the E-W center line of the SE1/4.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, over a plastic-encased magnet, with brass cap mkd.</p> <p style="text-align: center;">SE 1/16 S 5</p> <p style="text-align: center;">2014</p> <p>From this point, a Nevada Department of Transportation right-of-way monument, a wooden post, 3 1/2 x 3 1/2 ins. firmly set, projecting 39 ins. above the ground, mkd. "NHD" on the N. face, bears S. 87°30'10" E., 3.582 chs. dist.</p> <p>From this same point, a Nevada Department of Transportation right-of-way monument, a wooden post, 3 1/2 x 3 1/2 ins. firmly set, projecting 41 ins. above the ground, mkd. "NHD" on the N. face, bears S. 87°19'20" E., 3.363 chs. dist.</p> <p>From this same point, a Nevada Department of Transportation right-of-way monument, a concrete post, 6x6 ins. firmly set, projecting 6 ins. above the ground, mkd. with an "N" cast into the W. face and a nail on top of the post, bears S. 87°16'20" E., 3.335 chs. dist.</p> <p>From this same point, a Nevada Department of Transportation right-of-way monument, a wooden post, 3 1/2 x 3 1/2 ins. firmly set, projecting 46 ins. above the ground, mkd. "NHD" on the S. face, bears S. 24°28'20" E., 8.623 chs. dist.</p>
24.50	<p>Westerly edge of U.S. Highway No. 93, asphalt surfaced, bears N. and SE.</p>
30.919	<p>Point for the C-N-SE 1/64 sec. cor. of sec. 5.</p> <p>Set a magnetic nail, 1 in. long, flush with the asphalt surface of U.S. Highway No. 93, 2 lks. W. of the centerline of the pavement.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 30 ins. in the ground, over a plastic encased magnet, for a reference monument, bears N. 65°10' E., 91.8 lks. dist., with brass cap mkd. RM T7S R61E S5 60.6 FT. TO COR. 2014 and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 31 ins. in the ground, over a plastic encased magnet, for a reference monument, bears S. 45°11' E., 105.7 lks. dist., with brass cap mkd. RM T7S R61E S5 69.8 FT. TO COR. 2014 and an arrow pointing to the cor.</p>

SUBDIVISION OF SECTION 5,  
T. 7 S., R. 61 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	From this point, a Nevada Department of Transportation right-of-way monument, a wooden post, 3 1/2 x 3 1/2 ins. firmly set, projecting 43 ins. above the ground, no visible markings, bears N. 87°36' E., 3.032 chs. dist.
41.225	The C-E 1/16 sec. cor. of sec. 5.
	<hr/> <p>From the S 1/16 sec. cor. of secs. 4 and 5.</p> <p>N. 88°53'30" W., on the E-W center line of the SE1/4 of sec. 5.</p> <p>Over gently rolling land, descending to the W., through creosote and scattered cacti.</p>
8.30	From this point, a wooden post, 7 x 2 1/2 ins., firmly set, projecting 49 ins. above the ground, bears NORTH, 0.841 chs. dist. Not utilized in the course of this survey.
19.60	U.S. Highway No. 93, center of asphalt surface, 42 lks. wide, bears SE. and NW.
20.065	The SE 1/16 sec. cor. of sec. 5.
40.130	The point for the C-S 1/16 sec. cor. of sec. 5.
	<hr/> <p>From the N-S 1/64 sec. cor. of secs. 4 and 5.</p> <p>N. 88°58'50" W., on the E-W center line of the NE1/4SE1/4 of sec. 5.</p> <p>Over gently rolling land, descending to the W., through creosote and scattered cacti.</p>
7.80	Center of dirt road, 12 lks. wide, bears NE. and SW.
19.90	U.S. Highway No. 93, center of asphalt surface, 42 lks. wide, bears N. and S.
20.061	The C-N-SE 1/64 sec. cor. of sec. 5.
	<hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The lands included in this survey are located in Lincoln County, Nevada, in the Pahranaagat Valley, within the community of Alamo, Nevada. U.S. Highway No. 93 is the main access and the average elevation of the area surveyed is 3500 feet above sea level. Vegetation consists of creosote and other native grasses.</p> <hr/>

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

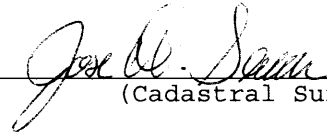
Matthew L. Taylor	Survey Aid
Tallon A. Ricci	Survey Aid

## CERTIFICATE OF SURVEY

I, Jose A. Serna, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 30th day of June, 2014, I have dependently resurveyed a portion of the subdivisional lines, and subdivided section 5, Township 7 South, Range 61 East, of the Mount Diablo Meridian, in the State of Nevada, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

**APR 08 2015**

(Date)

  
(Cadastral Surveyor)

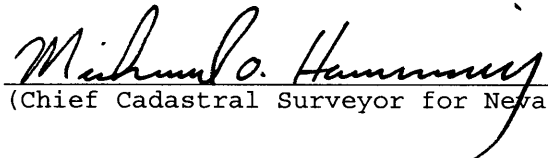
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Reno, Nevada

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of section 5, Township 7 South, Range 61 East, of the Mount Diablo Meridian, Nevada, executed by Jose A. Serna, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

**APR 08 2015**

(Date)

  
(Chief Cadastral Surveyor for Nevada)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in Township 7 South, Range 61 East, Mount Diablo Meridian, Nevada, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief Cadastral Surveyor for Nevada)~~