


Chains.

- 243.50 Bottom of canyon, 2.00 chs. wide, 2.80 ft. below top ridge, course S.25°W. ascend.
Wood road **and** draw, bears N.25°E. and S.25°W.
- 262.60 Top of ridge, 170 ft. above canyon. bears N.25°E. and S.25°W. descend.
- 273.00 Top of bluff. 60 ft. below top of ridge, bears E. and W. abrupt descent.
- 273.20 Foot of bluff, 70 ft. below top. bears E. and W. Descend.
- 275.63 Intersect N. bdy of Tp. 42.15 chs. E. of cor. of secs. 31 and 32. here to fore described in book of exteriors. At point of intersection. Set an iron post, 3ft. long, 2 ins. diam., 24 ins. in the ground, for closing cor. of secs. 4 and 5. with brass cap mkd:

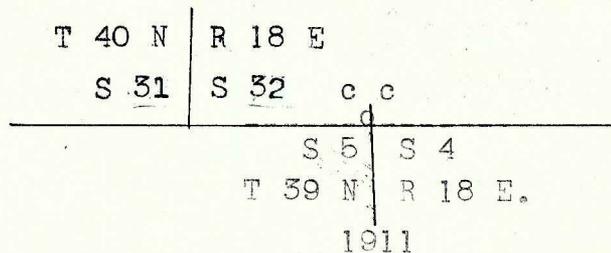

and raise a mound of stone, 2ft. base, 1-1/2 ft. high, S. of cor.

Land, mountainous.

Soil, rocky. 4th. rate.

No timber.

Low scattering sage brush, undergrowth.

Drainage W.

August 24, 1911.