


Subdivision of T.23 N., R.24 E.

Chains.

79.70 Spur, 325 ft. above wash, slopes S.W.; descend.

87.53 Intersect the N. bdy. of Tp. 4.40 chs. N.89°43'W. of the cor. of secs. 34 and 35, which is a quartz rock heretofore described. I build a cor. as follows:

Set an iron post, 3 ft. long, 2 ins. in dia., 24 ins. in the ground for closing cor. of secs. 2 and 3, with a brass cap, mkd.

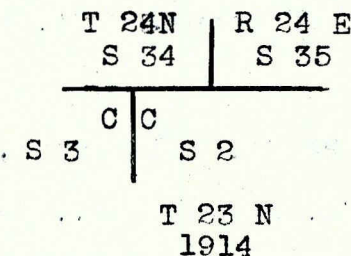

and raise a mound of stone, 2 ft. base, 1½ ft. high, S. of the cor. this cor. is 10 ft. below spur.

Land, rolling and hilly.

Soil, a light reddish sandy clay loam, with a gravelly and rocky subsoil.

Vegetation, scanty rabbitbrush, and greasewood. No timber. Drainage to the southwest.

Sept. 29, 1914.

Sept.19: At 8h.00m.a.m.,l.m.t., I set off 39°49'N. on the lat. arc; 1°40'N. on the decl. arc; and determine a meridian with a solar at the cor. of secs. 3,4,33, and 34.

Thence I run

N.0°05'E., on a true line bet. secs. 33 and 34.; ascend.

15.00 Spur, 140 ft. above sec. cor., slopes S.E.; descend.


22.00 Draw, 20 ft. below spur, course S.E.; ascend.

30.00 Spur, 155 ft. above draw, slopes S.E.; descend.

33.20 Draw, 40 ft. below spur, course S.E.; ascend.

39.00 Spur, 65 ft. above draw, slopes S.E.; descend.

40.00 Set an iron post, 3 ft. long, 1 in. in dia., 12 ins. in the ground torsolid rock in a mound of stone, for ¼ cor. of secs. 33 and 34, with a brass cap, mkd.



and raise a mound of stone, 2 ft. base, 1½ ft. high, W.of cor.