

SUBDIVISION OF T.24 N., R.26 E.

Chains


and dig pits, 18x18x12 ins., E. and W. of the post, 3 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, N. of cor. Also top of low ridge, bears N. and S.

43.50 Dry wash, 20 lks. wide, course, S; ascend S.E. slope.

62.70 Top of high ridge, bears N.E. and S.W. High point of ridge bears N. 10 chs.

79.35 Intersect the W. bdy. of the tp. 13.60 chs. S. of the cor. of secs. ~~1, 6, 7~~ and 12, which is an iron post, 1½ ft. above ground, 3 ins. diam., with a mound of earth W. of cor., and pits in each sec. I change the markings on this post to indicate a corner common to the 2 secs. 1 and 12. At the point of intersection

I set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for closing corner of secs. 6 and 7, with brass cap mkd.;

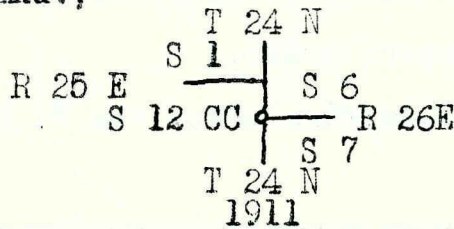


and dig pits, 24x18x12 ins., crosswise on each line, N. and S., 3 ft., and E. of the post, 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, E. of cor.

From the closing corner above described, I run South on the west bdy. of sec. 7.

26.40 An iron post, 1½ ft. above ground, 1 in. diam., with a mound of earth on the W. and pits N. and S. of the cor., for ¼ sec. cor., marked to refer to secs. 7 and 12, which I change to refer to sec. 12 only.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor. of sec. 7, with brass cap mkd.;



and raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

Also from said closing corner, I run N. on the W. bdy. of