


Subdivision of T. 30 N., R. 31 E.

Chains and raise a mound of stone, 2 ft. base 1 1/2 ft. high, W. of cor.
 40.20 Top of low ridge, bearing N 20° E and S 20° W.; descend.
 55.50 Draw course N 20° E ascend ridge bring N. and S 20° W.
 79.95 Intersect sixth standard parallel north, 2.98 Chains, N 89° 39' E of standard cor. of secs. 33 and 34 which is a lava rock, 3 x 9 x 8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor General. At the point of intersection I build a cor. as follows:
 Set an iron post 3 ft. long, 2 ins. diam., 24 ins. in the ground for closing cor. of secs. 3 and 4, with brass cap mtd.

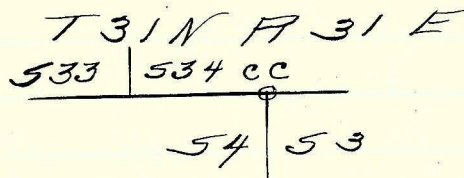

1912

and raise a mound of stone, 2 ft. base 1 1/2 ft. high, S. of cor.
 Sand, rolling
 Soil, rocky and gravelly; 2nd rate.
 Undergrowth, sage brush.
 No timber.

37.02
39.85

From the closing cor. of secs. 3 and 4 I run N 89° 39' E on the N. bdy. of sec. 34. of ³ ~~zone~~ ³ ~~zone~~ N 89° 59' E
 Set an iron post 3 ft. long, 1 in. diam., 24 ins. in the ground for 1/4 cor. of sec. 3, with brass cap mtd.

53

1/4

1912