



Resurvey of the E. boundary of T. 25 N., R. 32 E.

- Chains Surface rolling.
Soil gravelly and sandy, 3rd. rate.
Undergrowth scattering rabbit brush.
Drains east.
-
- North on a true line bet. secs. 1 and 6.
Asc. over rolling land.
- 5.40 Top of east slope of spur, bears E., desc.
14.20 Dry wash, 8 lks. wide, course S. 80° E., asc. gradually.
35.00 Asc. abruptly.
40.00 Point for $\frac{1}{4}$ sec. cor. falls on steep sliderock slope,
unsafe for cor.
40.30 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
the ground to bedrock, in a mound of stone for
witness $\frac{1}{4}$ sec. cor., with a brass cap, marked

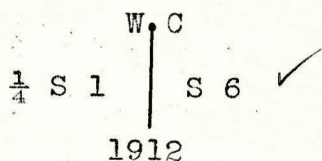

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of
cor'.
- 50.00 Top of ridge, bears NE and SW., desc.
52.00 Desc. abruptly.
66.30 Canon and dry wash, 40 lks. wide, course N. 15° E., asc.
71.00 Top of ridge, bears E. and W., desc.
73.10 Intersect Fifth Standard Parallel N. 6.22 chs. N. 89° E. of
the cor. of Tps. 26 N., Rs. 32 and 33 E.
Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins.
in the ground for closing cor. of Tps. 25 N., Rs.
32 and 33 E., with a brass cap, marked

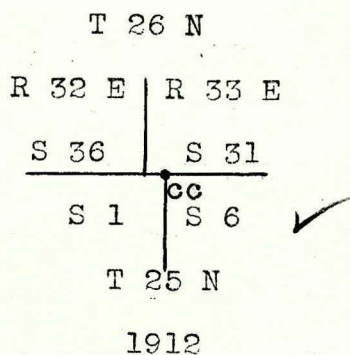

- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.