Resurvey of 2nd Standard parallel north, R25E

Chains

West. on S. bdy. sec. 31
Descend over rolling land draining N.

39.95 The old standard ¼ cor. of secs. 31, which is a granite stone 10 x 6 x 12 ins. above ground, bears N. 2.05 Chs. dist. I destroy the cor.

40.00 Set an iron post 3 ft. long, 1 in. diam., 24 ins. in the ground, for ¼ cor. of sec. 31 with brass cap mkd.;

S 31
¼

1913 ;

and raise a mound of stone, 2 ft. base, 1½ ft. high. N. of cor. Ascend N. E. slope of rocky ridge

57.00 Top of ridge, bears N. 20° W. and S 20° E., descend

72.00 Gulch, course N. and asc.

77.80 Intersect N. and S. line 2.20 Chs. S. of standard cor. of Tps. 10 N., R 24 and 25 E. previously described. I obliterate the markings on the E. face of this cor. thus making it a cor. of T. 11 N. R. 24 E. only, and at the point of intersection build a cor. as follows:

Set an iron post 3 ft. long, 3 ins. diam., 24 ins. in the ground for closing cor. of the S.W. cor. of T. 11 N., R. 25 E. with brass cap mkd.;

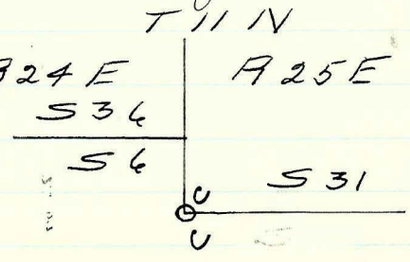

T 10 N R 25 E ;
1913