


Subdivision of T. 15 N., R. 26 E.

Chains

Cap mkd.;

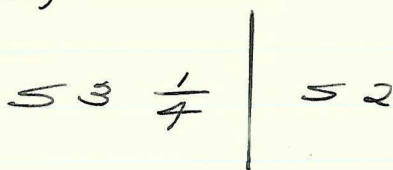


1913 ;

dig pits, 18x18x12 ins., N. and S. of cov. 3 ft. dist.; and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cov.

69.44

Interest 3^d Standard Parallel north 28.87 Chs. W. of the standard cov. of secs. 34 and 35, T 16 N., R 26 E. heretofore described. At the point of intersection I build a cov. as follows:

Set an iron post 3 ft. long, 2 ins. diam., 24 ins. in the ground for claiming cov. of secs. 2 and 3, with brass cap mkd.;

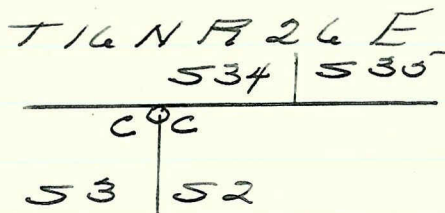

1913 ;

dig pits, 24x18x12 ins. Crosswise on each line, E. and W., 3 ft., and S. of cov., 7 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, S. of cov.

Land, valley plains.
Soil, sandy, granly loam; 2nd rate
Undergrowth, sage and desert brush,
greasewood and bunch grass
no timber

July 21, 1913