

Subdivision of T. 15 N., R. 26 E.

chains

Aug. 7, 1913

From the cor. of secs. 4, 5, 8 and 9, I run N 0° 3' W. bet. secs. 4 and 5 thru gently rolling land draining east


40.00

No iron posts being available I establish this cor. as follows: Set a basalt stone 5x6x14 ins., 9 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ 55 on W. face and 54 on east face; and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

69.57

Intersect 3rd Standard Parallel north, 28.57 chs. west of the standard cor. of secs. 32 and 33, T 16 N., R. 26 E. At the point of intersection I build a cor. as follows:

Set an iron post 3 ft. long, 2 ins. diam., 24 ins. in the ground, for closing cor. of secs. 4 and 5, with brass cap mtd.;

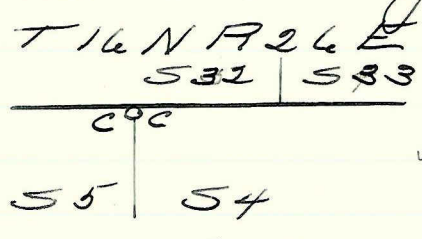

1913

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

Land, gently rolling valley
Soil, sandy loam, gravelly and stony; 2nd rate
Undergrowth, sage and desert brush, greasewood and bunch grass
No timber.

Aug. 7, 1913.