


12.

Subdivisions of T. 30 N., R. 42 East

Chains

the ground for the closing cor. of secs. 1, and
6, with brass cap mkd.,

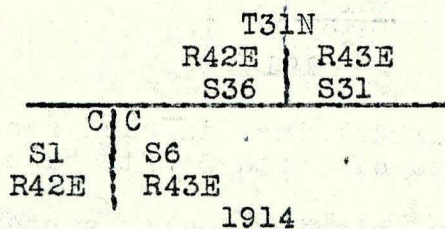

Dig pits, 24x18x12 ins., crosswise on each line E. and W.
3 ft. dist. and S. of cor. 7 ft. dist. and raise a mound
of earth 4 ft. base, 2 ft. high S. of corner.

Land; Valley, sloping S.W.

Soil: dry sandy light loam, 14 ins. deep, on hard clay
subsoil.

Undergrowth: sage and desert brush.

No timber.

Land suitable for agriculture.

June 24, 1914.

SUBDIVISIONS OF T. 30 N., R. 42 EAST

Surveyed by A. T. Harris:

June 25, 1914: At 8h. 10m. a.m., l.m.t., I set off 40°
25' N. on the lat. arc; 23° 25' N. on the decl. arc; deter-
mine a meridian with the solar at the cor. of secs.
25, 30, 31 and 36, on the E. bdy. of Tp.

Thence I run

West on a true line bet. secs. 25 and 36.

Over rolling and broken foothills, descend along
north slope.

17.20 Bottom of draw, 70 ft. below sec. cor., course N. 10° E.,
ascend.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
the ground to solid rock and in a mound of stone, for
¼ sec. cor., with brass cap mkd.,

S25
¼
S36
1914

and raise a mound of stone, 2 ft. base, 1½ ft. high N.
of corner.

55.20 Ridge, 90 ft. above bottom of draw, bears N. and S.,
descend.

72.30 Wash, 50 lks. wide, 125 ft. below top of ridge, course
N. 15° E., ascend 85 ft. to sec. cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins.
in the ground for cor. of secs. 25, 26, 35 and 36,
with brass cap mkd.,

T30NR42E	
S26	S25
S35	S36
1914	

and raise a mound of stone, 2 ft. base, 1½ ft. high W.
of corner.

Land; rolling and broken foothills.

Soil; rocky loam, fine texture, covered with large lava
boulders.

Undergrowth, sage and desert brush.

No timber.