


Dependent Resurvey of a portion of the subdivisions of T. 42 N., R. 39 E.

Chains

From the original corner of secs. 8, 9, 16 and 17, which is a willow stake, 8 ft. long, in a mound of stone, marked and witnessed as described by the surveyor-general, S. 0° 02' W., 413 lks. to the true position of the cor. of secs. 8 and 17, hereinafter determined and described, thence, N. 0° 03' W., on true line bet. secs. 8 and 9, topography omitted.


40.00 Set an iron post, 3 ft. long, 1 in. in dia., 26 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked,

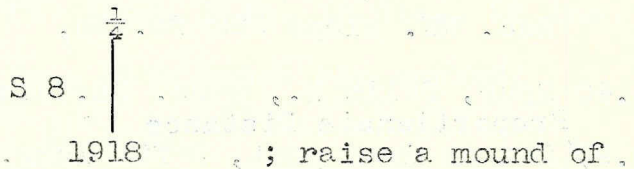

stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

44.13 The original $\frac{1}{4}$ sec. cor., bet. secs. 8 and 9, which will now refer to sec. 9 only. I turn it around so that the $\frac{1}{4}$ will face the East, and move the mound ^{to} the East.

80.00 Set an iron post, 3 ft. long, 2 ins. in dia., 6 ins. in ground, to bedrock, in a mound of stone, for cor. of secs. 5 and 8, with brass cap marked,



1918 ; raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

From the cor. of secs. 5 and 8, N. 0° 10' E., on true line bet. secs. 4 and 5, omitting topography,

4.13 The original cor. of secs. 4, 5, 8 and 9, which is granite, 6x6x6 ins. above ground, marked and witnessed as described by the surveyor-general. I move the mound to the East of the cor, and change it to refer to secs. 4 and 9, only.