

East boundary of T. 30 N., R. 28 E.

Chains I begin at the cor. of Ts. 29 and 30 N., Rs. 28 and 29 E., a description of which is found in Book "D" under Group No. 112, containing the field notes of the survey of portions of the North and West boundaries of T. 29 N., R. 29 E., which was made in conjunction with the survey of this township

Thence

North, between secs. 31 and 36


Over mountainous land. Asc. SE. slope 40 ft. to

24.50 Desc. NE. slope

34.30 Asc. SE. slope 45 ft. to 45.35

39.00 Road, bears N. 45° E. to Seven Troughs and S. 65° W. to Vernon

40.00 Set an iron post, 3 ft. long, 1 in. dia., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd

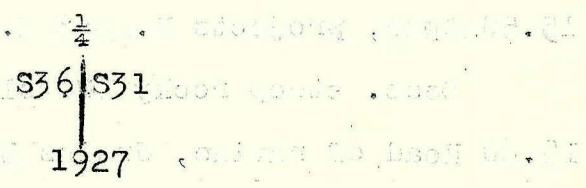

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

45.35 Point of spur, projects E.

Desc. NE. slope 40 ft. to

50.70 Old road and wash, 20 lks. wide, 1 ft. deep, drains E., road bears E. and N. 75° W. about 4 chs., thence N. 35° W. Asc. SW. slope 75 ft. to

61.05 Spur ridge, bears N. 15° W. and S. 10° E.

Desc. NE. slope 35 ft. to

65.05 Wash in ravine, 5 lks. wide, 1 1/2 ft. deep, drains E.

Asc. SW. slope 170 ft. to

73.30 Asc. E. to SE. slope

80.00 On SE. slope Set an iron post, 3 ft. long, 2 ins. dia., 12 ins. in the ground to solid rock, in a mound of stone, for the cor. of secs. 25, 30, 31 and 36, with brass cap mkd