

366

Subdivision of T. 3 N., R. 57 E.

Chains

72.30 Draw, drains SW.; ascend 25 ft. along a SE. slope.


77.30 Spur, projects SW.; continue along a S. slope.

79.00 Head of a draw draining SW.

82.86 Intersect the west boundary of the township at a point 1.33 chains N. of the corner of sections 25 and 36, T. 3 N., R. 56 E., heretofore described.

At the point of intersection,

Set an iron post, 3 ft. long and 2 ins. in diameter, 18 ins. in the ground to solid rock, and in a mound of stone, for the closing corner of sections 30 and 31, with brass cap marked:

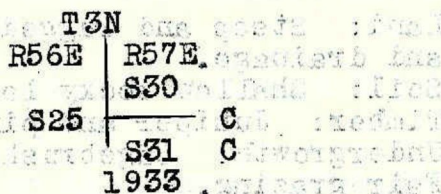

whence

A juniper, 3 ins. in diameter, marked BT, bears N. 85°15' E., 119 links distant.

A pinon, 6 ins. in diameter, marked T3NR57ES31BT, bears S. 64°00' E., 140 links distant.

Land: Rough and broken mountain slopes; general SW. exposure and drainage.

Soil: Shallow, gravelly loam; 3rd rate.

Timber: Pinon, juniper and mahogany.

Undergrowth: Sagebrush, buck brush. Bunch grass. Fair grazing.

Beginning at the corner of sections 29, 30, 31, and 32.


Thence N. 0°12' W., between sections 29 and 30.

Over mountainous land, through medium dense timber and a dense undergrowth; descend 150 ft. over a N. slope.

10.10 Draw, drains E. from the SW.; ascend 365 ft. along a rocky SE. slope.

40.00 On a steep and rocky SE. slope,

Set an iron post, 3 ft. long and 1 in. in diameter, 8 ins. in the ground, and in a mound of stone, for the 1/4 section corner, with brass cap marked:



whence