


INDEPENDENT RESURVEY OF THE SOUTH BDY. OF T. 13 S., R. 70 E.

Chains

74.40 E. rim of a flat topped mesa, bears N. and S.; continue over mesa top.

60.00 N. 19 lks. from the tangent,
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 5, 6, 31, and 32, with the brass cap mkd.

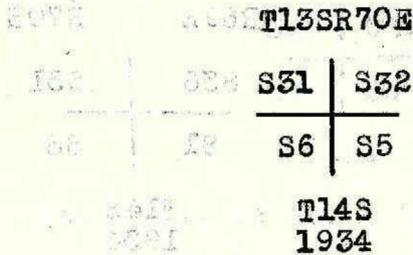

18x18x12 ins., in each sec., 3 ft. dist. dig pits,

Land, rolling mesa and rolling sand flats.
Soil, sandy to gravelly, clay on the mesa; 3rd rate; sand on the sand flats; 4th rate.
Undergrowth, mesquite, creosote and cacti.
Grazing, fair.
No timber.

West, on a transit line describing the tangent, which bears S. 89° 56.7' W., bet. secs. 6 and 31.


Over level mesa top, through scattering undergrowth.

22.20 Wash, 90 lks. wide and 50 ft. deep, drains SW.; begin slight ascent to W. rim of mesa.

29.20 W. rim of mesa, bears N. and S.; descend 100 ft. over steep W. slope of mesa.

39.90 Wash, 20 lks. wide and 10 ft. deep, drains SW.

40.00 N. 23 lks. from the tangent.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with the brass cap mkd.



1934 raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, 15 ft. W. of cor.

This cor. is set on the steep W. bank of a wash, where it would be impracticable to establish a mound of stone. Mound is therefore established as described above.

Continue over nearly level land.

41.60 Wash, 20 lks. wide and 20 ft. deep, drains S.

43.50 Small spur, projects S. approximately 3.00 chs.

46.90 Large shallow wash, 80 lks. wide and 30 ft. deep, drains S.; ascend slightly over a gentle SE. slope.