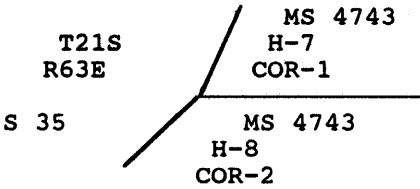


DEPENDENT RESURVEY OF A PORTION OF MINERAL SURVEY No. 4743,  
T. 21 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA

CHAINS	
5.634	Intersect the E-W center line of sec. 34, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, hereinbefore described, bears N. 89°33' E., 2.208 chs. dist.
8.540	Intersect the line bet. secs. 34 and 35, at a point from which the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, hereinbefore described, bears S. 4°32' E., 2.053 chs. dist.
13.102	Point for Cor. No. 2 of M.S. No. 4743, Hydro No. 8 lode, identical with Cor. No. 1 of M.S. No. 4743, Hydro No. 7 lode, determined by the method of grant boundaries; there is no remaining evidence of the original corner.
	Set a stainless steel post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock, over a DEEP-1 magnetic marker and in a collar of stone, 3 ft. base to top, with brass cap mkd.
	 <p style="text-align: center;">1991</p>
	Raise a mound of stone, 3 ft. base, 3 ft. high, SE. of cor.
	<hr/> <p>Thence N. 42°43' E.</p>
12.642	Cor. No. 2 of M.S. No. 4743, Hydro No. 7 lode, on line 4-1 of M.S. No. 4743, Hydro No. 11 lode, hereinbefore described.
	<hr/> <p>SUBDIVISION OF SECTION 26, T. 21 S., R. 63 E., MOUNT DIABLO MERIDIAN, NEVADA</p> <hr/>
	From the $\frac{1}{4}$ sec. cor. of secs. 26 and 35.
	N. 2°10' E., on the N-S center line of sec. 26.
	Over mountainous land, covered with scattered creosote brush, mesquite and cacti.
7.641	Computed centerline of Lake Mead Drive, asphalt surfaced, on curve bears N. 30°01' E. from S. 70°28' W.
15.836	Intersect line 2-3 of M.S. No. 4743, Hydro No. 5 lode, at a point from which Cor. No. 2 of M.S. No. 4743, Hydro No. 5 lode, identical with Cor. No. 3 of M.S. No. 4743, Hydro No. 4 lode, hereinbefore described, bears S. 64°37' W., 3.555 chs. dist.
18.50	Double wood pole transmission line, bears N. 51 $\frac{1}{2}$ ° E. and S. 51 $\frac{1}{2}$ ° W.
20.236	Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 26.