

Chains

From the cor. of secs. 2, 3, 34 and 35, Ts. 5 and 6 S., R. 66 E., which is a iron post, marked and witnessed as described by the Surveyor General.


West, on N. boundary of sec. 3.

Asc. over rough mountain land, E. slope of Meadow Valley Wash, covered with a dense growth of sage brush and scattering cedar, live oak, juniper and mountain rush.

On account of impassable cliffs it was necessary to project a line East, 14.89 chs. dist., to a point where a base line could be established.

From a point, East, 14.89 chs. dist. from the cor. of secs. 2, 3, 34 and 35, project line west to top of impassable cliff and set flag.

Auxiliary flag bears N. 89° 36' W., 20.00 chs. dist.; from auxiliary flag, flag on top of cliff bears S. 57° 10' W.,; all bearings checked by direct reading of the solar, and all angles checked by deflection:

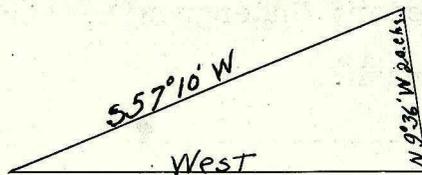

Dist. by triangulation-----38.90 chs.

Dist. measured E. from the cor. of secs. 2, 3, 34 and 35 - 14.89 "

Dist. from cor. of secs. 2, 3, 34 and 35 to flag---- 19.01

19.01 Top of impassable cliff, 724 ft. above sec. cor.

Continue asc. of 84 ft.

24. 20 Top of asc., bears E. and W. Desc. 12 ft.

29.90 Head of ravine, course NE. Asc. 232 ft.

40.00 Set iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground, to solid rock, surrounded by mound of stone, 3 ft. base, 2 ft. high, with brass cap marked

S 34
 $\frac{1}{4}$ ———
 S 3
 1919

from which