



Subdivision of T. 15 N., R. 26 E.

chains Aug. 2, 1913
N. 0° 2' W. ht. sec. 3 and 4
low valley land, gradually ascend
40.00 Set an iron post 3 ft. long,
1 in. diam., 24 ins. in the
ground for 4 sec. cov. with
brass cap mkd.;

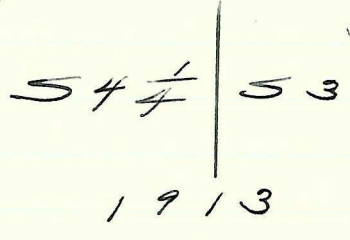

69.52 dig pits, 18 x 18 x 12 ins., N.
and S. of cov. 3 ft. dist.; and
raise a mound of earth,
3 1/2 ft. base, 1 1/2 ft. high, W. of cov.
Intersect 3rd Standard Parallel
north, 28.81 Chs. W. of the standard
cov. of secs. 33 and 34, T. 16 N.,
R. 26 E. previously described.
At the point of intersection
I build a cov. as follows:
Set an iron post 3 ft. long,
2 ins. diam., 24 ins. in the
ground for closing cov. of secs.
3 and 4, with brass cap mkd.;

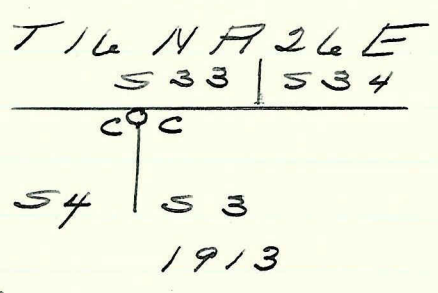

dig pits, 24 x 18 x 12 ins., crosswise
on each line, E. and W., 3 ft.,
and S. of cov., 7 ft. dist.; and
raise a mound of earth, 4 ft. base,
2 ft. high, S. of cov.

Land, valley plain, drainage south
Soil, sandy and gravelly, 1st. rate
Undergrowth, sage and desert