


Dependent

Resurvey of a portion of the N. boundary of T. 33 N., R. 60 E

Chains

The cor. of secs. 2, 3, 34 and 35 is a 2 inch. iron post set 24 ins. in the ground, with a brass cap, marked

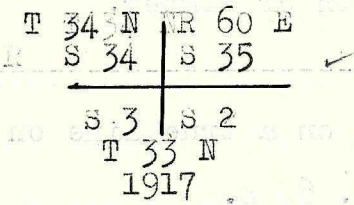

and a stone mound, 2 ft. base, 1½ ft. high W. of cor.

Note: The position of the above described cor. has been determined by proportional measurement on the reestablished N. bdy. of the township, retracement and method of which is set forth in the notes in connection with the returns of T. 33 N., R. 59 E.

I commence at the cor. of secs. 2, 3, 34 and 35 on the N. bdy., and run

S. 89° 21' W. on a true line bet. secs. 3 and 34. The

course having been previously determined by retracement.

Over level meadow land.

35.80 Leave meadow, wire fence bears N. and S.  
36.00 Telephone line, Deeth, Ruby Valley, bears N. and S.  
36.85 Road, Ruby valley to Deeth, bears N. and S.

38.15 wire fence, bears N. and S. Enter meadow.

40.48 Proportional measurement, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor. with a brass cap, marked

¼ S 34

-----  
S 3

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

60.00 Leave meadow, bears NE. and SW.

75.00 Creek, 4 lks. wide, 3 ins. deep, course NE.

80.96 Proportional measurement, set an iron post, 3 ft. long, 2 ins. in diam, 24 ins. in the ground for cor. of secs. 33 and 34, T. 34 N., R. 60 E., with a brass cap, marked



1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.