



- Chains.
 41.00 Top of low spur, 10 ft. above $\frac{1}{4}$ cor., projects N.; descend.
 45.10 Gulch, 10 lks. wide, 2 ft. deep, 25 ft. below top of spur, course N. 30° W.; ascend.
 68.65 Top of ridge, 130 ft. above gulch, bears N. and S.; descend.
 88.75 Dry wash, 310 ft. below top of ridge, course N. 30° W.; descend 75 ft. to the closing corner.
 133.00 Dry wash, 20 lks. wide, 4 ft. deep, course S.
 134.00 Intersect W. bdy. of the Tp., 20.27 chs. N. of the cor. of secs. 25 and 36 of T. 19 N., R. 45 E. At the point of intersection, I build a corner as follows:
 Set an iron post, 3 ft. long, 2 ins. in diameter, 24 ins. in the ground for the corner to secs. 30 and 31 with brass cap marked:

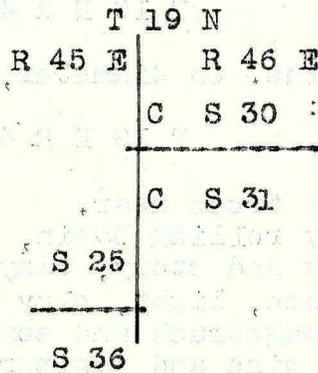

1915

and raised a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.
 Land, rolling foothills.
 Soil, gravelly and rocky, light brown, clay loam; shallow, exposed, outcropping ledges of granite rock.
 Undergrowth, sagebrush and some grass.
 Timber, pinon pine and juniper, scattered on E. half mile.

- N. 0° 03' W. bet. secs. 29 and 30.
 Over rolling land, descend N. slope through scattered timber.
 6.72 Ravine, 5 lks. wide, 1 ft. deep, 65 ft. below section cor., course N. 40° W.; over rolling hills, gradual ascent.
 19.80 Dry wash, course N. 70° W.
 40.00 Set an iron post, 3 ft. long, 1 in. in dia., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked:



and raised a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 A pinon pine, 10 ins. in diameter, bears N. 15° 15' E., 244 lks. dist., marked:

$\frac{1}{4}$ S 29 BT

A juniper, 10 ins. in diameter, bears N. 4° 30' W., 443 lks. dist., marked:

$\frac{1}{4}$ S 30 BT

- 56.85 Dry wash, 10 lks. wide, 1 ft. deep, course N. 40° W.
 59.85 Dry wash, course N. 60° W.
 74.88 Dry wash, 20 lks. wide, 5 ft. deep, course N. 50° W.
 77.88 Dry wash, 30 lks. wide, 6 ft. deep, course N. 70° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diameter, 24 ins. in the ground, for cor. to secs. 19, 20, 29 and 30, with brass cap marked: