

Retracement of portion of subdivisions T. 29. N., R. 29 E.

Chains The bearing of this half mile is North, and the distance 39.24 chs.

From the cor. of secs. 17, 18, 19, and 20 West on retracement between secs. 18 and 19


40.00 Intersect the old 1/4 sec. cor., which is a basalt stone firmly set in the ground, marked and witnessed as described in the original field notes

The bearing of this half mile is West, and the distance 40.00 chs.

Subdivisions T. 29 N., R. 29 E.


From the 1/4 sec. cor. between secs. 18 and 19 West between secs. 18 and 19 Over gently rolling land

40.05 Intersect W. boundary of township, 44 lks. South of the cor. of secs. 13, 18, 19 and 24, which is described in field notes of survey of a portion of T. 29 N., R. 29 E., under Group 112, made in conjunction with the survey of this fractional township, I remark cor. to read as follows:

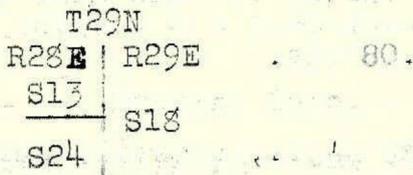

1927 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. At point of intersection

Set an iron post, 3 ft. long, 2 ins. dia., 27 ins. in the ground, for the cor. of secs. 18 and 19, with brass cap mkd



1927 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. Land, gently rolling. Soil, sandy loam. Timber, none. Undergrowth, sagebrush. General drainage, SW. Grazing, poor.

From the cor. of secs. 7, 8, 17, and 18