


DEPENDENT RESURVEY EAST BOUNDARY OF T.20 N.,R.25 E.

Chains

40.13 The 1/4 sec. cor., which is a basalt stone, 15x8x8 ins., lying on the ground and marked 1/4 on one face.

At cor. point,

Set an iron post, 3 ft. long, 1 in. in dia., 28 ins. in the ground with the original cor. monument and about 1 qt. of glass deposited alongside for 1/4 sec. cor., with brass cap marked

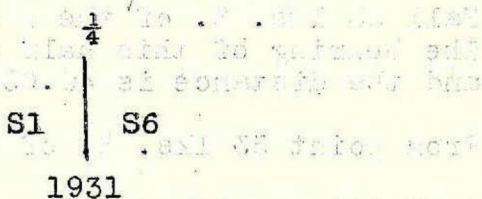

Thence

N.1° 07'E., with continuous measurement.

72.15 Leave sand-hills and hummocks, enter marsh and tall tules, bears E. and W.

85.77 The closing cor of T.20 N.,Rs. 25 and 26 E. heretofore described.

Land, nearly level clay flats, low sand-hills and hummocks, and level marsh.

Soil, heavy clay and sandy; 4th. rate.

No timber.

Undergrowth, scattering greasewood and dense patches of tules.

DEPENDENT RESURVEY SOUTH BOUNDARY OF T.20 N.,R.25 E.

REESTABLISHMENT OF SURVEYS EXECUTED BY J.B.MENARDI, U.S. DEPUTY SURVEYOR IN 1905.

Random lines.

From a point 13 lks. N. of the cor. of Tps. 19 and 20 N., Rs. 25 and 26 E., heretofore described.

N.89°15'W., bet. secs. 1 and 36.

40.17 Fall 9 lks. S. of the 1/4 sec. cor. hereinafter described. The bearing of this half mile therefore is N.88°56'W., and the distance is 40.17 chs.

From point 9 lks. S. of the 1/4 sec. cor., continue

N.89°15'W., with continuous measurement.

80.15 Fall 15 lks. S. of the cor. of secs. 1,2,35, and 36 hereinafter described.